

Edisso®

Edisso, pure mineral shades



400/75 - Smoke
Fondo F: White



ENG

Edisso®

Edisso® provides an ideal mix of mineral shades for all exterior and interior applications. The colored aggregates provide thermal isolation properties in addition to a unique aesthetical effect.

Technical Name

Granite-like decorative product based on mineral chips.

Key Properties

- Unleaded
- Water based
- Washable (after full curing)
- Non-flammable
- Odorless
- 1 base color (400)
- Very low VOC content in compliance with:
 - EU directive 2010/79/EU
 - French decree No: 2011-321

Pack Size

- 1US Quart - (0.85 kg)
- 1US Gallon - (3.4 kg)
- 1US Drum - (17 kg)

Recommended Uses

Internal & external applications.

Type of Substrate

Plaster, embossed wall coverings, gypsum board, concrete, cement rendering, brick work & block work.

Finish

Granite-like finish.

Coverage

4-5 m² per kg.

Drying Time

1 hour depending on temperature and humidity.


Thinner

No thinning required.

Preparation

All surfaces to be painted should be clean, dry and free from loose & flaking material. Rub down & rinse. For best results, the substrate should be primed with COLORTEK® FONDO F before Edisso® application.

CODING SYSTEM

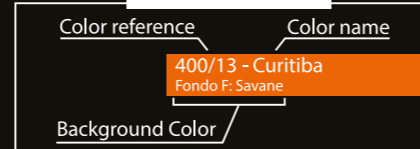

FR

Edisso®

Edisso® est un revêtement décoratif pour extérieur dont les agrégats permettent d'obtenir une finition minéral naturelle au propriétés antithermiques.

Nom Technique

Revêtement décoratif comprenant des agrégats modifiés pour un effet de pierre naturelle.


Propriétés

- Ne contient pas de plomb
- Produit en base eau
- Lavable
- Inodore
- 1 base (400)
- Faible teneur en COV conformément aux:
 - Directive EU directive 2010/79/EU
 - Decret Français No: 2011-321

Emballage

- 1US Quart - (0.85 kg)
- 1US Gallon - (3.4 kg)
- 1US Drum - (17 kg)

SYSTÈME DE CODAGE

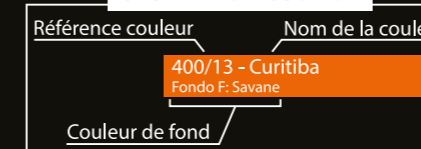

Instructions

Can be applied by a medium to long nap fiber or mohair roller in a criss-cross motion for best results, or by brush application in random strokes based on decorative preference. A water-based protection (Oxibond 4005 or 4005 F) can be applied after drying.

Do not apply at temperatures below 5° C or when rain is expected.

Cleaning

Remove as much product as possible from application equipment before cleaning. Clean equipment immediately after use with warm soapy water & rinse thoroughly.

Do not empty product into drains or watercourses.

Additional Info

Product batches are tested using a quality control system and are ISO 9001:2008 certified

Transportation & Storage

Care should be taken to avoid spillage. Protect from frost & humidity.

Usage Recommandé

Application en intérieur et extérieur.

Types de Support

Enduit, ciment, plâtre et plaque de plâtre, anciennes peintures usuelles absorbantes, etc.

Finition

Finition granit.

Rendement

4-5 m² par kg.

Temps de Séchage

60 minutes en fonction des conditions climatiques et de la température ambiante.

Diluant

Aucune dilution requise.

Préparation du Support

Le support doit être dur, propre, sain, sec, cohésif et libre de toute matière telle que salpêtre, mousse, lichen ou autres microorganismes pouvant empêcher l'adhérence du produit sur le support. Dans un premier temps, appliquer la couleur appropriée de la sous-couche COLORTEK® FONDO F.

Application

Appliquer Edisso® de manière croisée avec un rouleau à poil long en fibre ou en mohair ou à l'aide d'une brosse de manière aléatoire en fonction de l'effet désiré. Une fois sèche, appliquer COLORTEK® 4005 ou 4005 F pour une protection supplémentaire de la finition.

Ne pas appliquer à une température ambiante inférieure à 5°C ou par temps pluvieux.

Nettoyage des Outils

Eliminer autant que possible le reste du produit de la surface des outils. Nettoyer ces derniers en les frottant vigoureusement avec de l'eau et du savon. Ne pas vider les restes du produit dans égouts ou les voies d'eau.

Information Additionnelle

Le processus de fabrication de Edisso® est soumis au plus stricts contrôles de qualité certifiés conformes au standard ISO 9001: 2008.

Transport et Stockage

Stocker le produit à l'abri de l'humidité et des températures de gel.



Synergy, Added Value, Continuous Improvement,
Diversity, Integrity, Social Responsibility.



www.colortekpaint.com
info@colortekpaint.com





400/00 - Bone
Fondo F: White



400/20 - Cosmos
Fondo F: Ashes



400/31 - Capella
Fondo F: Craie



400/29 - Monet
Fondo F: Amande



400/01 - Funil
Fondo F: Savane



400/17 - Jatoba
Fondo F: White



400/53 - Amarelo
Fondo F: Amande



400/64 - Palomino
Fondo F: Canotier



400/77 - Belorizont
Fondo F: Tango



400/86 - Ametista
Fondo F: Tango



400/40 - Mombassa
Fondo F: Lichen



400/90 - Acquarello
Fondo F: Iode



400/19 - Exodus
Fondo F: Ashes



400/99 - Aran
Fondo F: Ashes



400/34 - Bellini
Fondo F: Craie



400/26 - Gibli
Fondo F: Biscuit



400/13 - Curitiba
Fondo F: Savane



400/51 - Halmstad
Fondo F: Coco



400/15 - Blonde
Fondo F: Amande



400/41 - Downtown
Fondo F: Canotier



400/59 - Cantaloupe
Fondo F: Tango



400/71 - Renoir
Fondo F: Tango



400/37 - Waterfall
Fondo F: Orage



400/85 - Barracuda
Fondo F: Iode



400/21 - Arabesco
Fondo F: Ashes



400/43 - Basalt
Fondo F: Ashes



400/33 - Bellary
Fondo F: Craie



400/27 - Lapidus
Fondo F: Biscuit



400/03 - Aquarius
Fondo F: Savane



400/62 - Granville
Fondo F: Coco



400/09 - Boreal
Fondo F: Canotier



400/57 - Raidho
Fondo F: Canotier



400/68 - Tupim
Fondo F: Tango



400/58 - Anxi Red
Fondo F: Tango



400/52 - Yukon
Fondo F: Orage



400/70 - Austral
Fondo F: Iode




400/44 - Aqua Mist
Fondo F: Ashes



400/22 - Galaxy
Fondo F: Ashes



400/32 - Arcadia
Fondo F: Craie

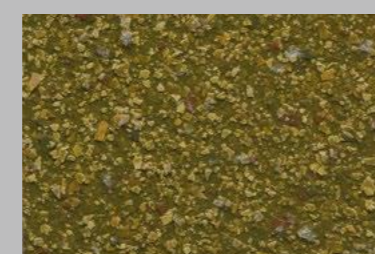

400/25 - Kalahari
Fondo F: Biscuit



400/14 - Arezzo
Fondo F: Sienna



400/45 - Aragon
Fondo F: Sienna



400/10 - Opala
Fondo F: Canotier



400/35 - Marigold
Fondo F: Canotier



400/81 - Wulian
Fondo F: Tango



400/91 - Copper
Fondo F: Tango



400/63 - Vesuvio
Fondo F: Orage



400/82 - Impala
Fondo F: Iode