

Wabi Sabi 2.0

Bark - Carpet Tiles



WELSPUN
FLOORING

Bark


Taking the philosophy of Wabi-Sabi a step forward, the Bark Collection showcases designs that are inspired by the precious cache of wisdom that values tranquility, harmony and beauty in imperfection.

Like how no two barks of a tree are the same, each bark is unique due to its imperfect cracks and designs, this collection celebrates these intricate natural designs and translates the same into beautiful textures and patterns.

When designs that are so inspiring, the Bark Collection can truly embrace the perfections of being imperfect.



Design Name : Bark

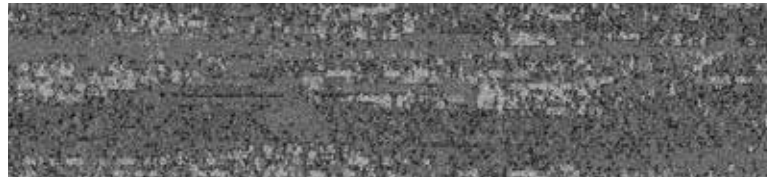

PEWTER | AC: CT001056



RHINO | AC: CT001057



STORM | AC: CT001058



CARROT | AC: CT001073



IRON | AC: CT001074



BULLION | AC: CT001059



IRON | AC: CT001060

Design Name : Bark



SLIME | AC: CT001063



IRON | AC: CT001064



SEA WATER | AC: CT001067



STORM | AC: CT001068

PRODUCT SPECIFICATIONS

Yarn	Nylon
Machine / Gauge	1/10 Loop Infinity
Tufted Weight(Oz)	32
Density	Min. 10,700
Total Thickness(mm)	5 to 6
Pile Thickness(mm)	Upto 2.5
Backing Type	PVC
SPI	9
Size(cm)	Plank (25X100)



www.welspunflooring.com

COLORWAYS



CARROT | AC: CT001073



IRON | AC: CT001074



RHINO | AC: CT001057



www.welspunflooring.com

COLORWAYS



BULLION | AC: CT001059



IRON | AC: CT001060



STORM | AC: CT001058



www.welspunflooring.com

COLORWAYS



LIME | AC: CT001063



IRON | AC: CT001064



RHINO | AC: CT001057



www.welspunflooring.com

COLORWAYS



SEA WATER | AC: CT001067



STORM | AC: CT001068



STORM | AC: CT001058




COLORWAYS



BULLION | AC: CT001059



IRON | AC: CT001060

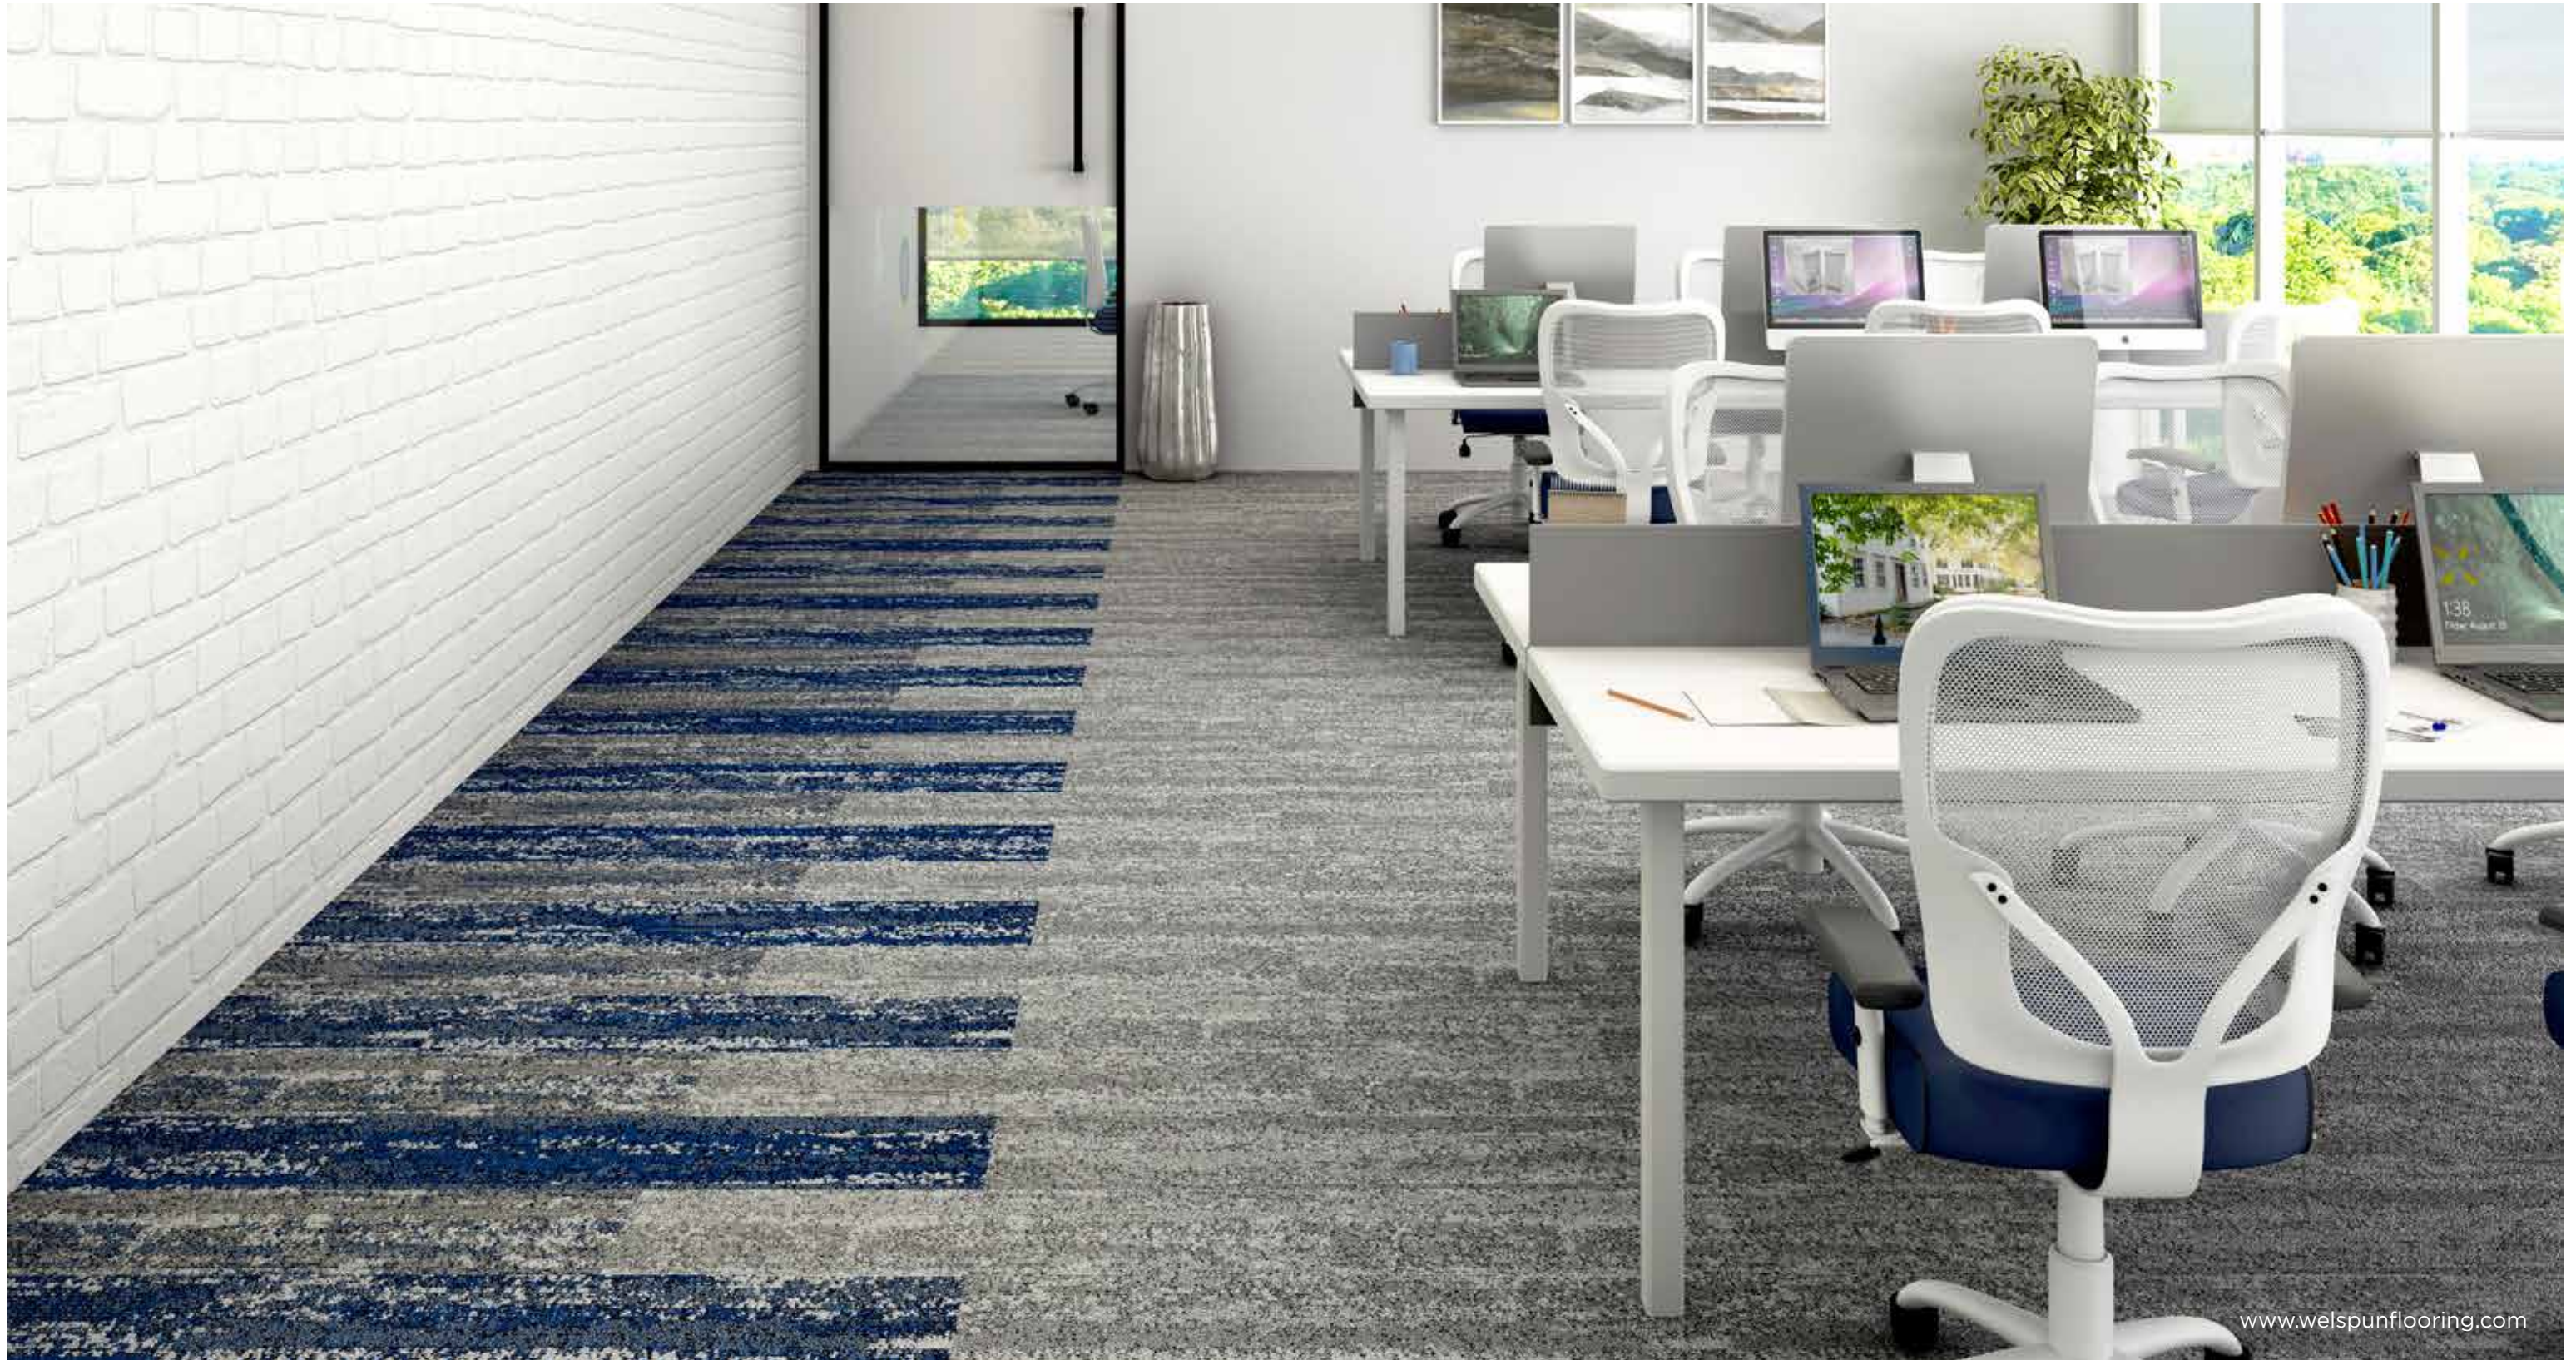

www.welspunflooring.com

COLORWAYS



SEA WATER | AC: CT001067



STORM | AC: CT001068



STORM | AC: CT001058



www.welspunflooring.com

COLORWAYS




BULLION | AC: CT001059




PEWTER | AC: CT001056

WELSPUN CARPET TILES ADVANTAGES




Multiple Design Possibilities




Solution Dyed Tufted Product



Ideal For Heavy Foot Traffic



Stain Protect



Easy To Maintain




Easy To Install



Offers Sound Insulation




Reduces Wastage During Installation




Fade Resistant



Made in India




40% Less Environmental Footprint



Less Lead Time

TRADEMARKS & TECHNOLOGIES




NY6+™

For colors those don't fade out, Welspun Floorings Ny6+™ is made up of a highly resilient fiber that is known for its superior color retention, strength, stain and fade resistance. With all this, your floor always retains its beauty come what may.




Welspun Ecolite™

Welspun Ecolite™ backing is made up of lightweight PVC that not only reduces the overall weight significantly but ensures a 40% less environment footprint than traditional carpets. Despite that, this backing retains the highest performance standards.



Now also available with **HealthyFloor™** (Optional)


We also have carpet tiles options with **antiviral property**. Tested and certified by Reslnnova labs, we are India's first antiviral carpet tiles. It kills 99.68 % human corona virus because of a special coating of silver iron and titanium oxide. We make healthy floors.










Comfortile™ (Optional)

With Comfortile™ backing, our tiles come with a customized felt-back that not only offers great underfoot comfort but also sound absorption. Comfortile™ provides extra levels of protection and support for high levels of acoustic and ergonomic support.






CERTIFICATIONS

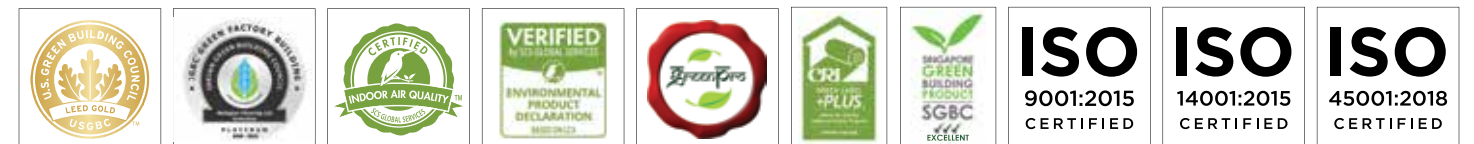

LAYOUT PATTERNS



LAYOUT PATTERNS



TEST REPORT SUMMARY

Test Name	Method	Test Name	Method
Anti Microbial Treatment	AATCC 174 (Part II & III)	Colour fastness to bleach	AATCC 6
Delamination	ASTM D 3936	Static Electricity	AATCC 134-1996
Tuft Bind	ASTM 1335-67	Anti Static	ANSI/ESD S 71
Dimensional stability	ASTM D7570	Castor Chair	DIN 54324
Pile weight	ASTM D5848-07	Hexapod	ASTM D 5252-15
Pile density	ASTM D5848-07	Static Coefficient	ASTM C1028
Total thickness	ASTM D6988-08	Dimensional stability (Aachen test)	DIN-STD-54318/ITTS-004
Pile height	ASTM D5823-05a	Anti Soil	ASTM D6540-05
Gauge	ASTM D5793 - 13	Shampoo Fastness	AATCC 138
Tuft density	ASTM D5848	Water Fastness	AATCC 107
Flammability (Pill Test)	ASTM D2859	Velcro-Loops	ITTS 112
"Flammability (Radiant Panel)"	ASTM E 648-06	Heavy Traffic test (Walk test)	ASTM6119-03
NBS Smoke Density (Flaming)	ASTM E 662-06	Sound transmission	ASTMC423-17
Lightfastness	AATCC 16 E	Sound Absorption	ASTMC423-17
Colour fastness to Ozone	AATCC 129	Static Loading	ISO 015/3415
Colour fastness to NO2	AATCC 164-2008	Green Carpet (VOC)	ASTM D5116
Crocking Dry and Wet	AATCC 165-2008	Acoustic- Nylon	BS EN ISO 354
Stain fastness	AATCC 175-2008/ITTS 002	Thermal Resistance	ASTM C 518



WELSPUN

FLOORING

To transform your flooring, just get in touch with us:

Address:

Welspun Global Brands Ltd,
Survey No 190, Chandanvelly, Near Hythabad, Shabad Mandal,
Ranga Reddy District, Telangana 501503, India

Contact us:

☎ 1800 120 1161

✉ contact_flooring@welspun.com

www.welspunflooring.com