












TD Walls is completely handmade by highly skilled artisans; with tools & machines being used to just add precision to the finished work. With every piece of wood being checked and carefully selected, the finished piece represents a true work of art.




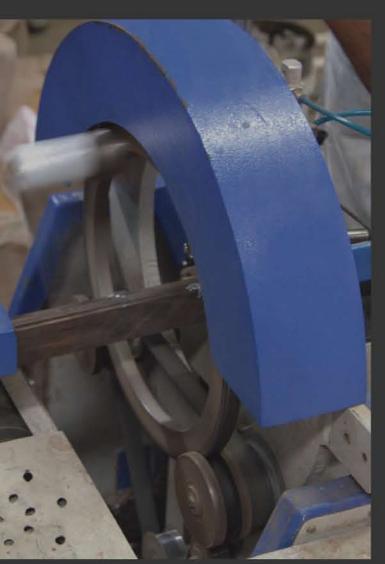











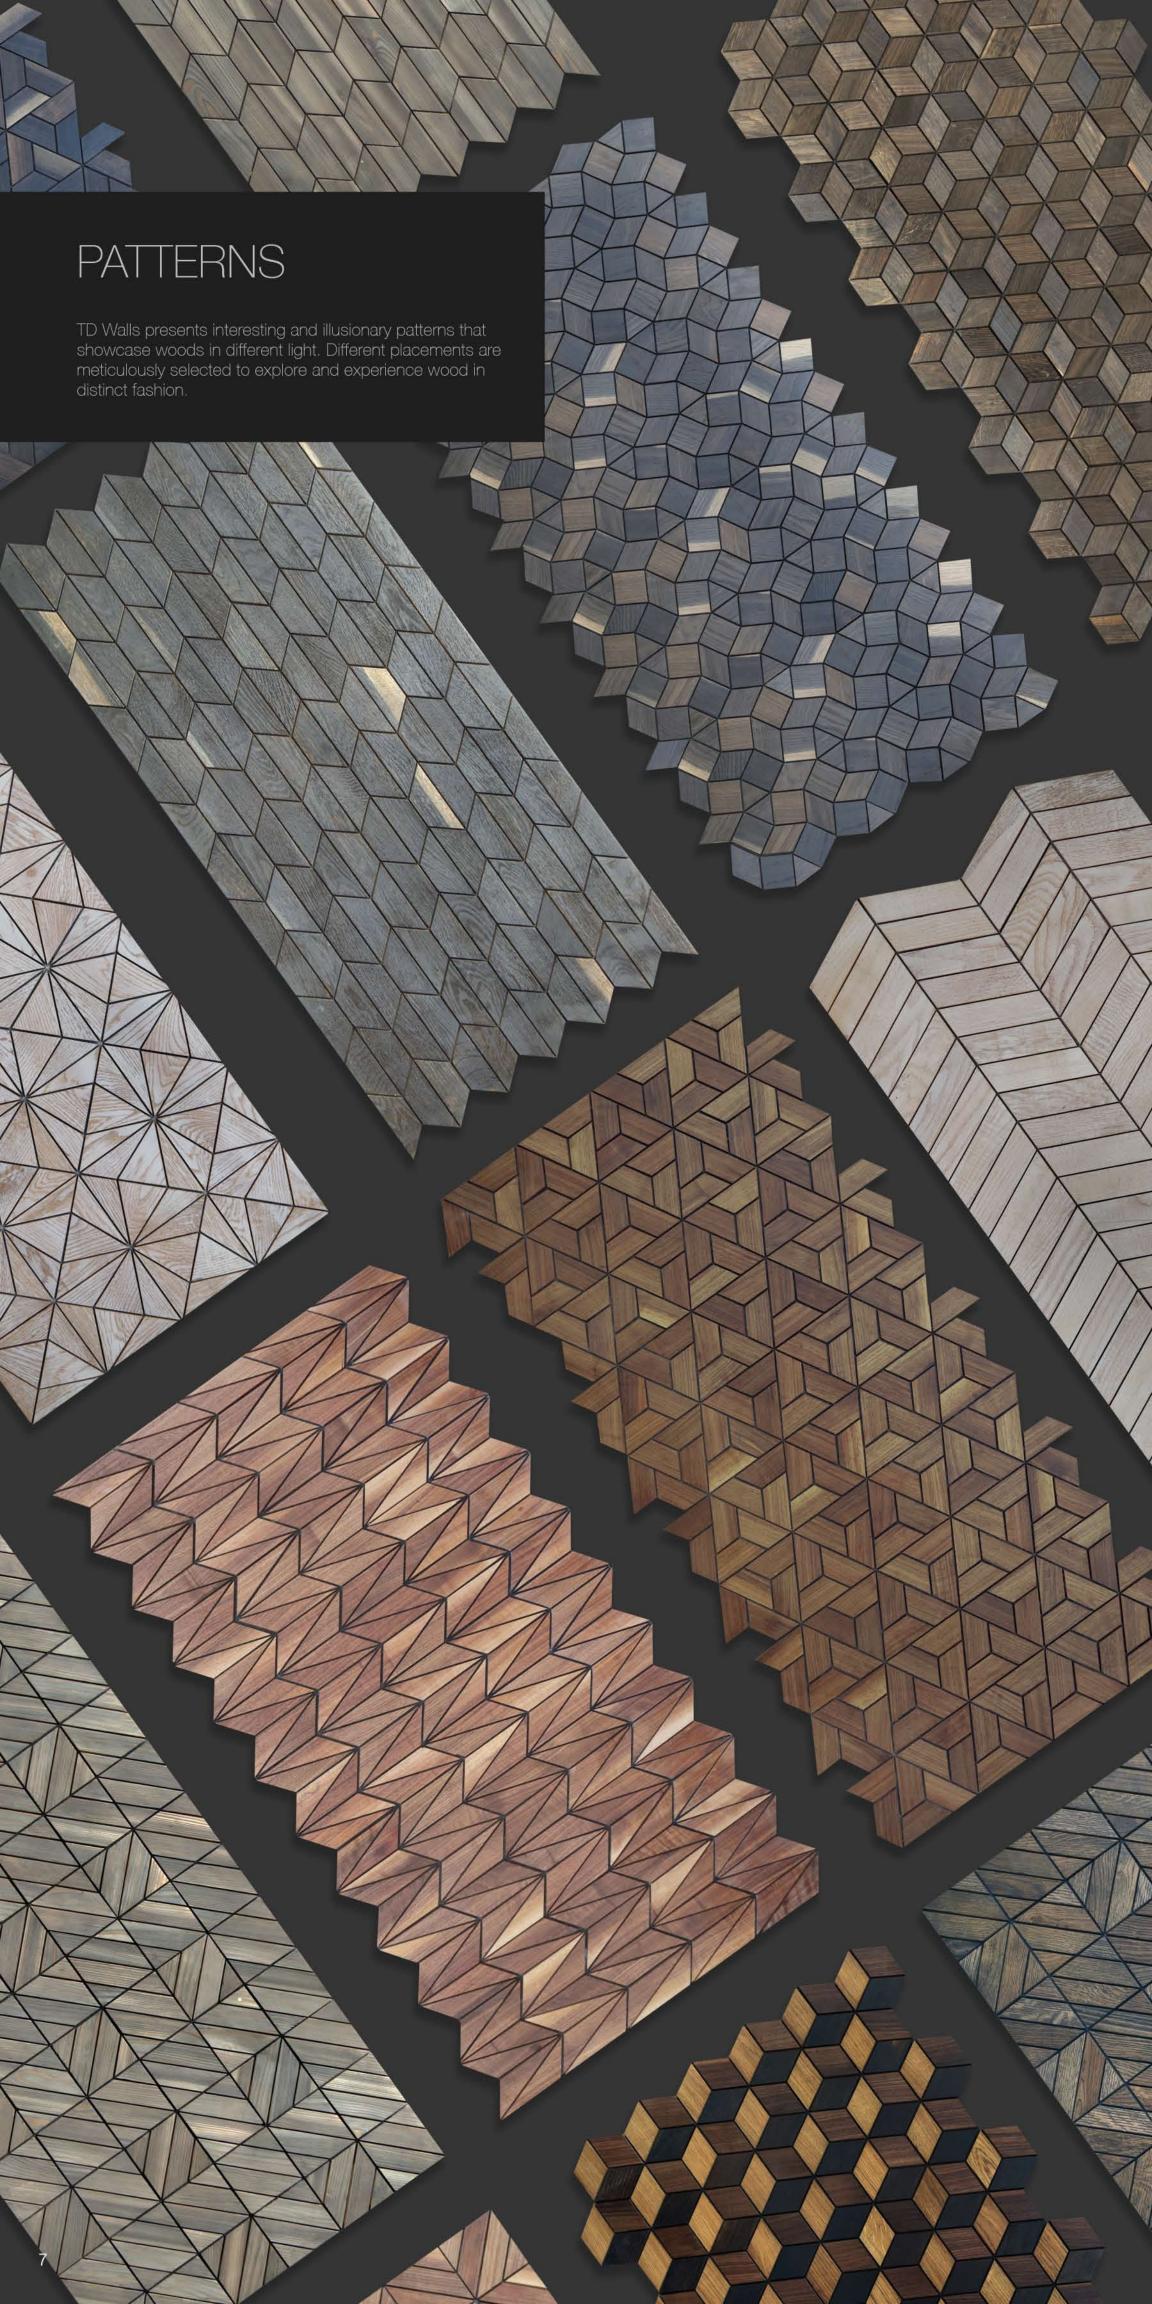

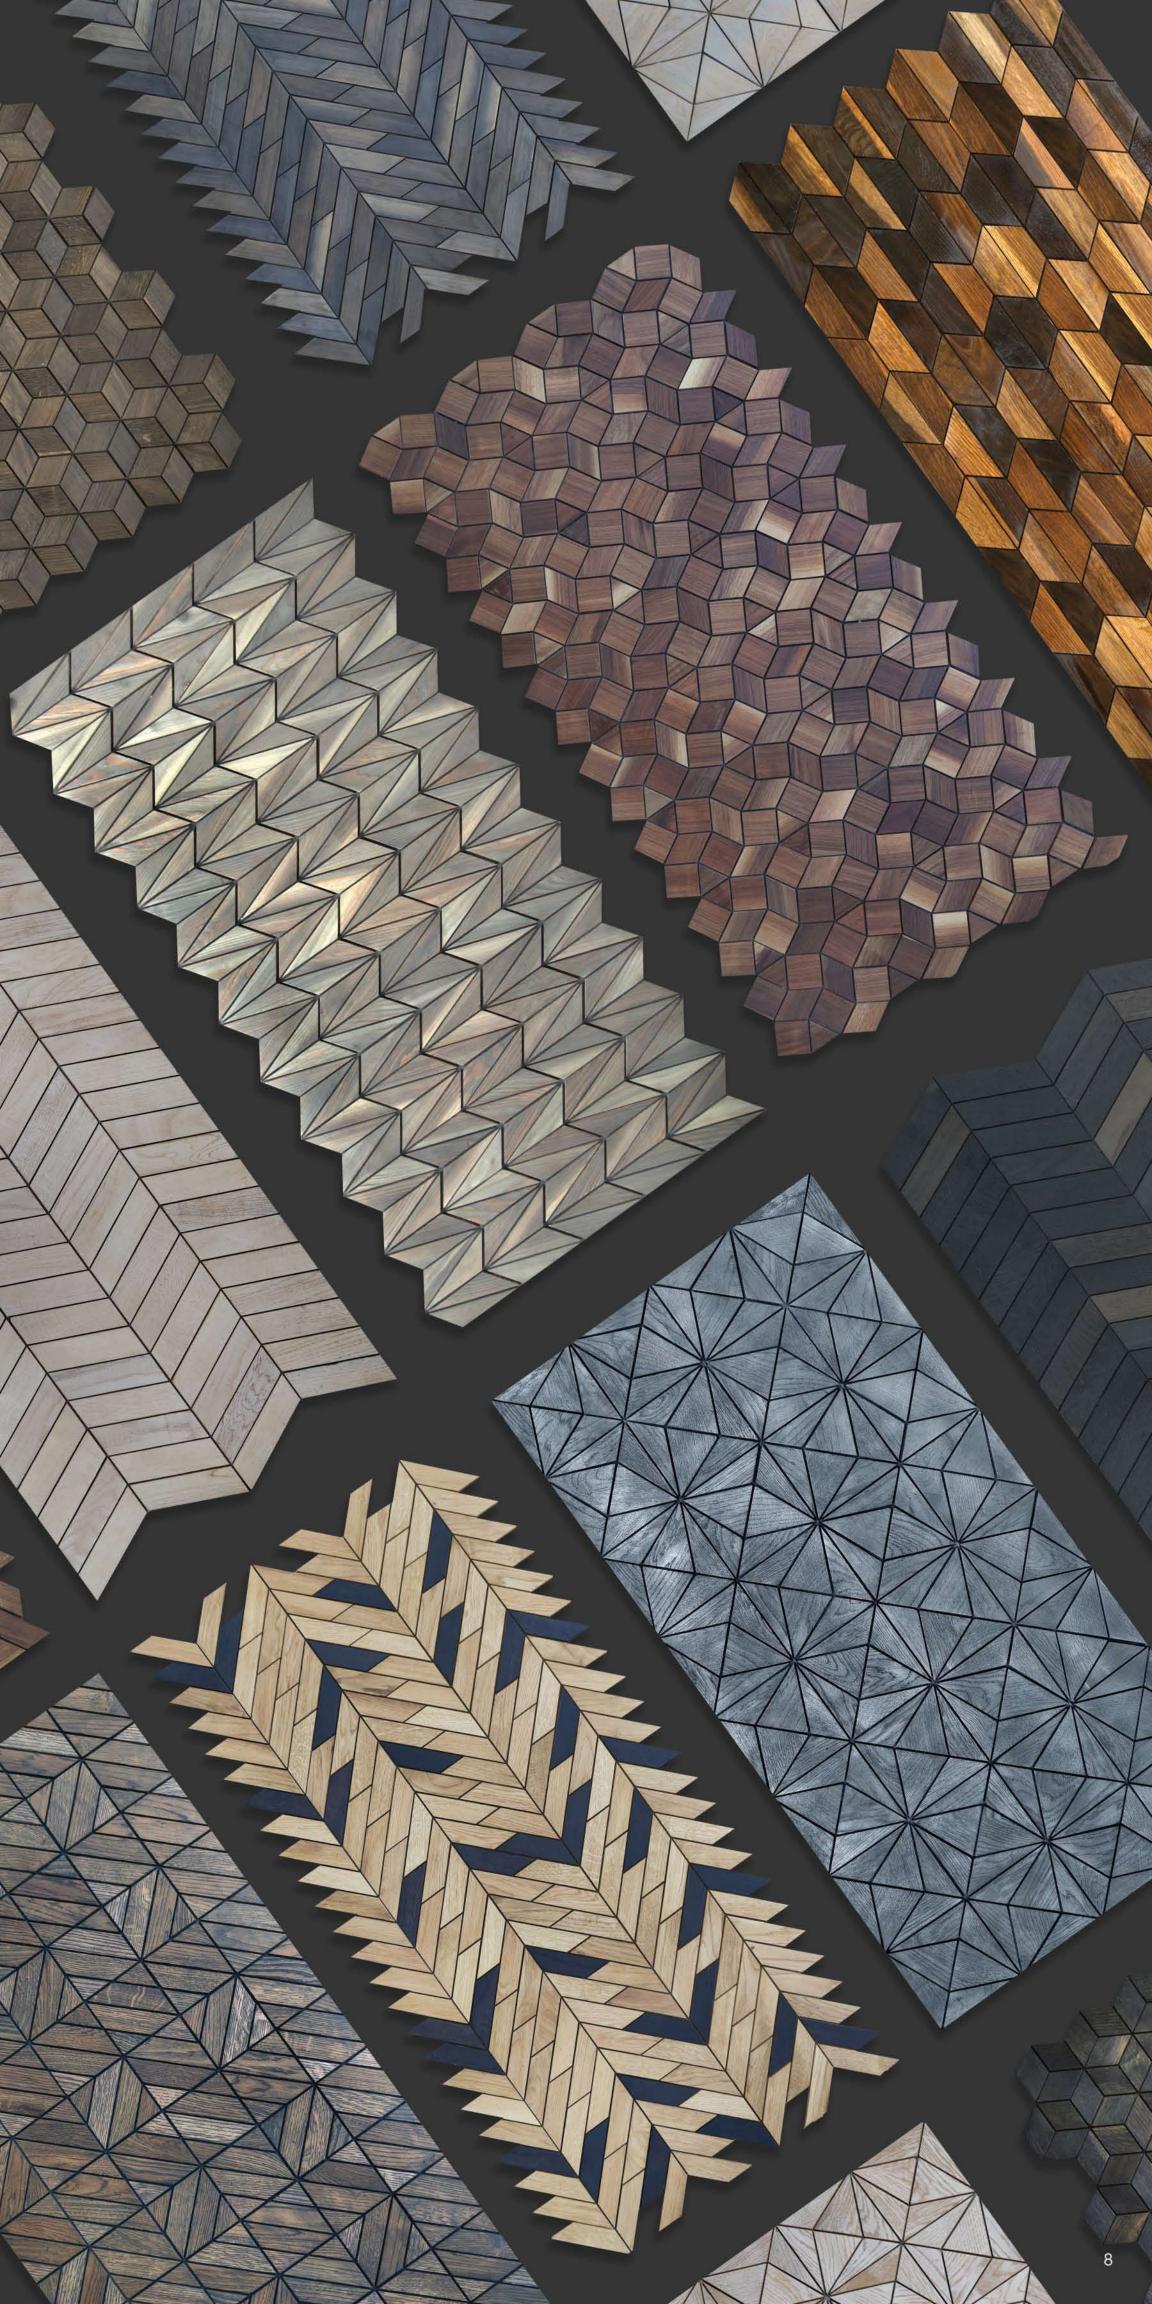

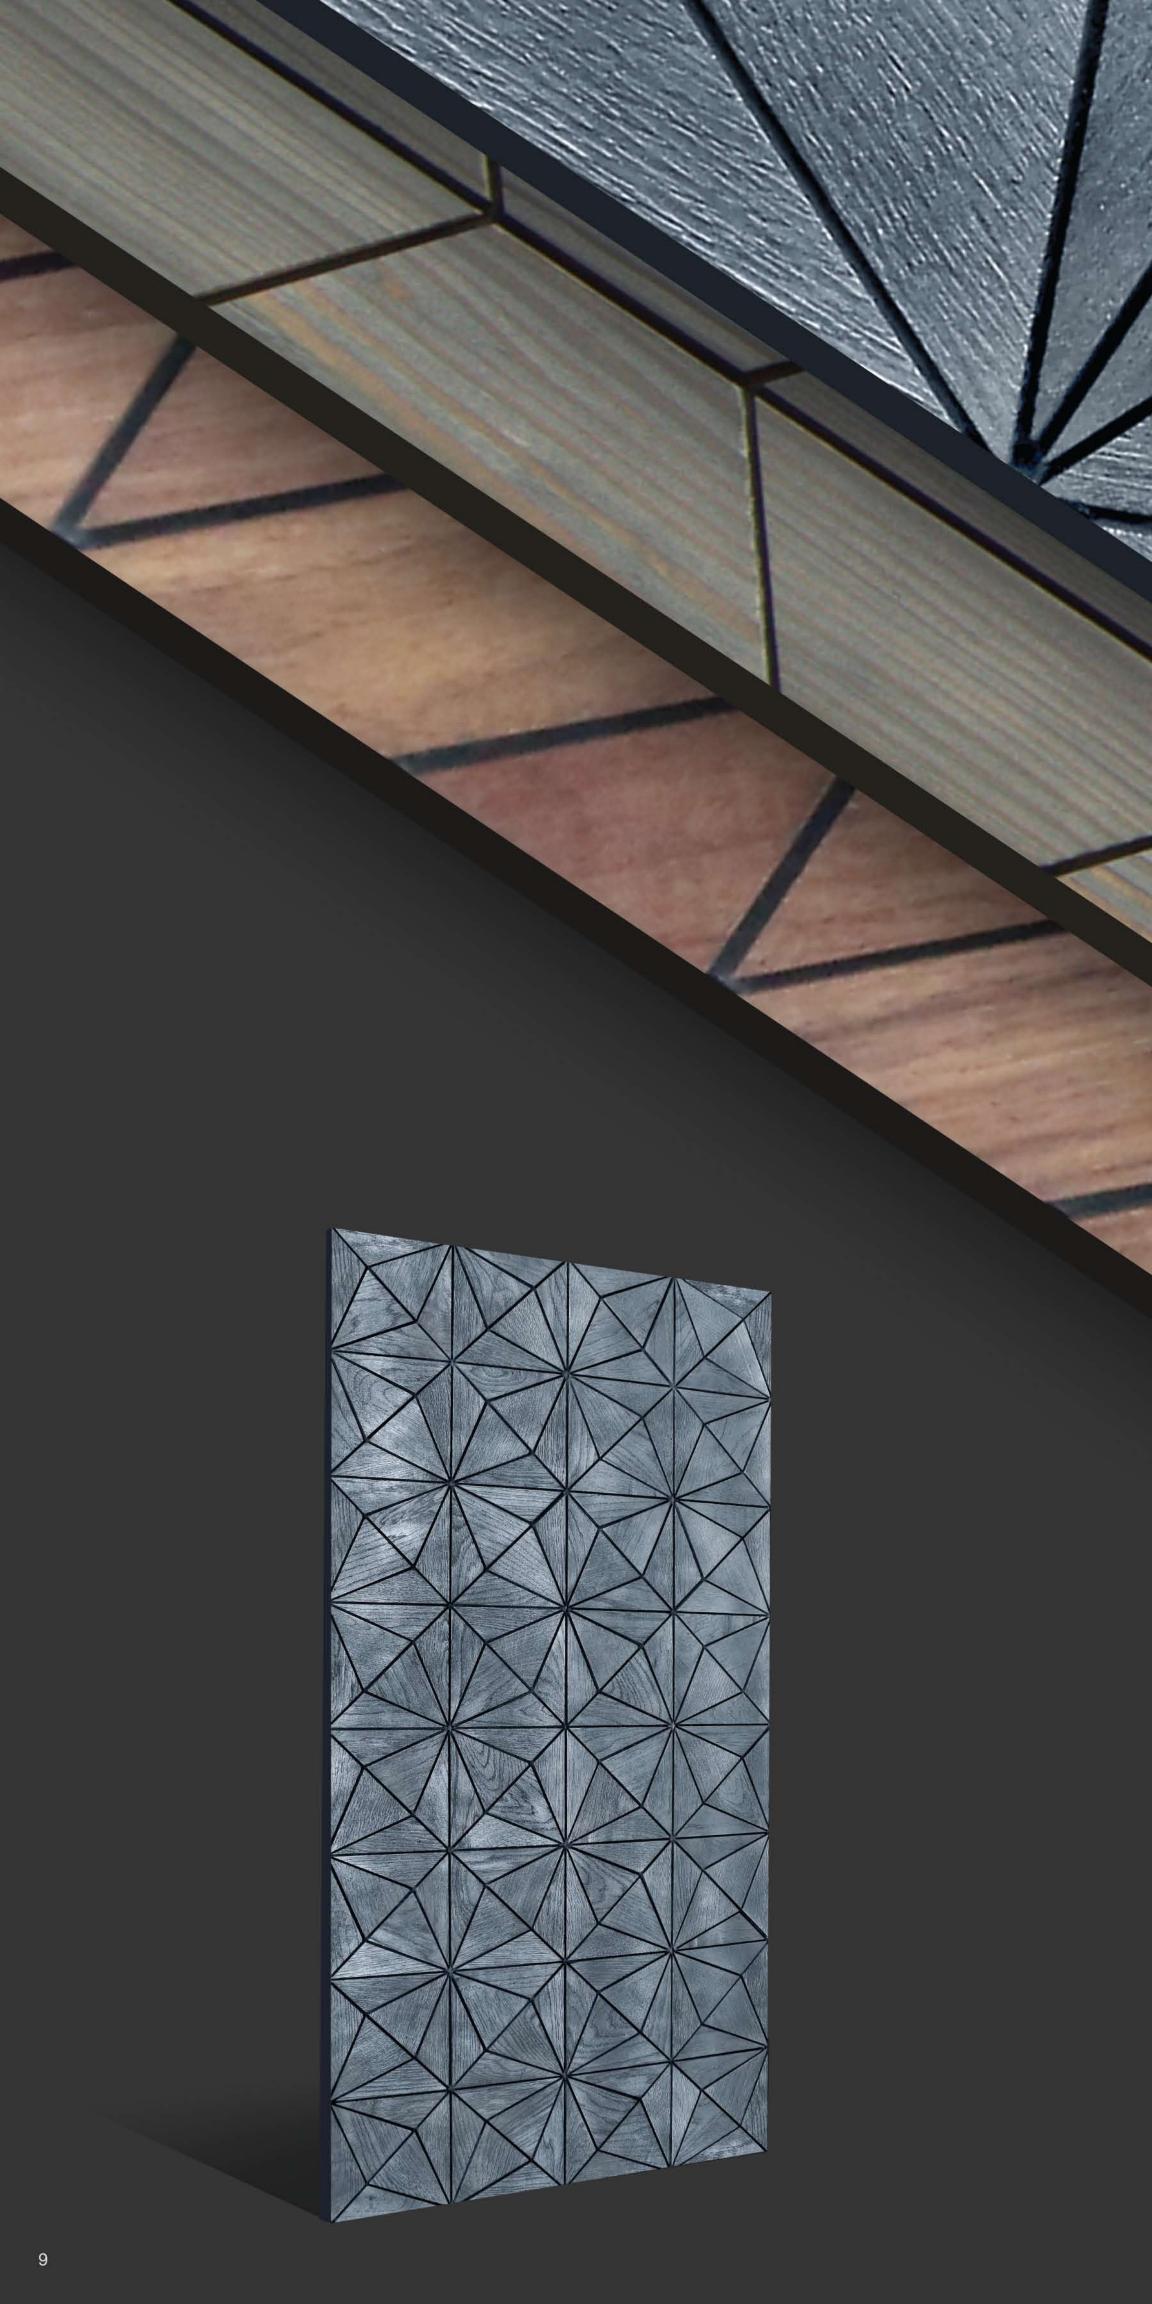

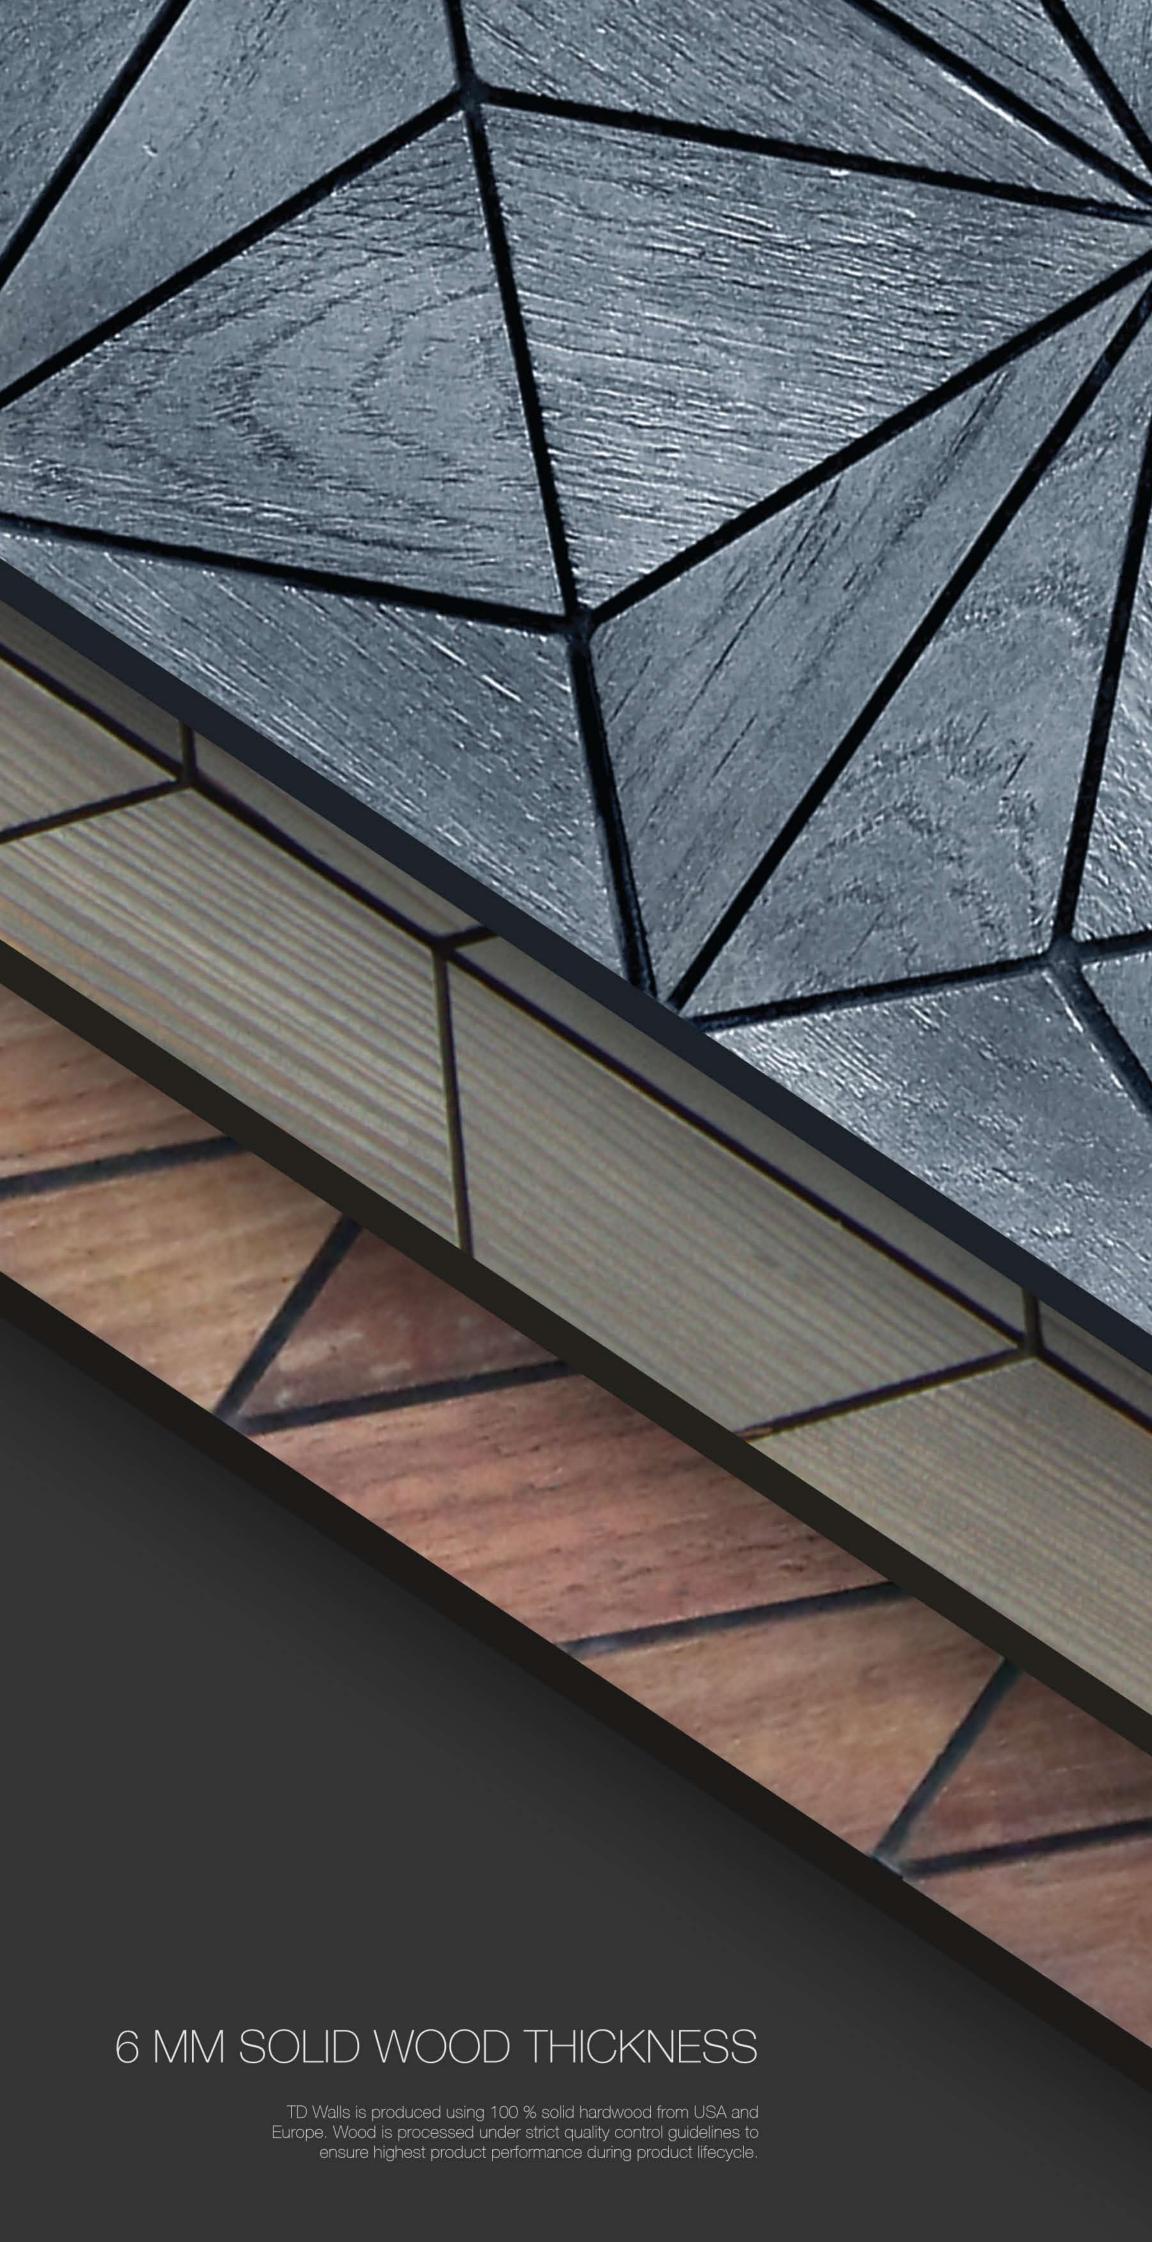

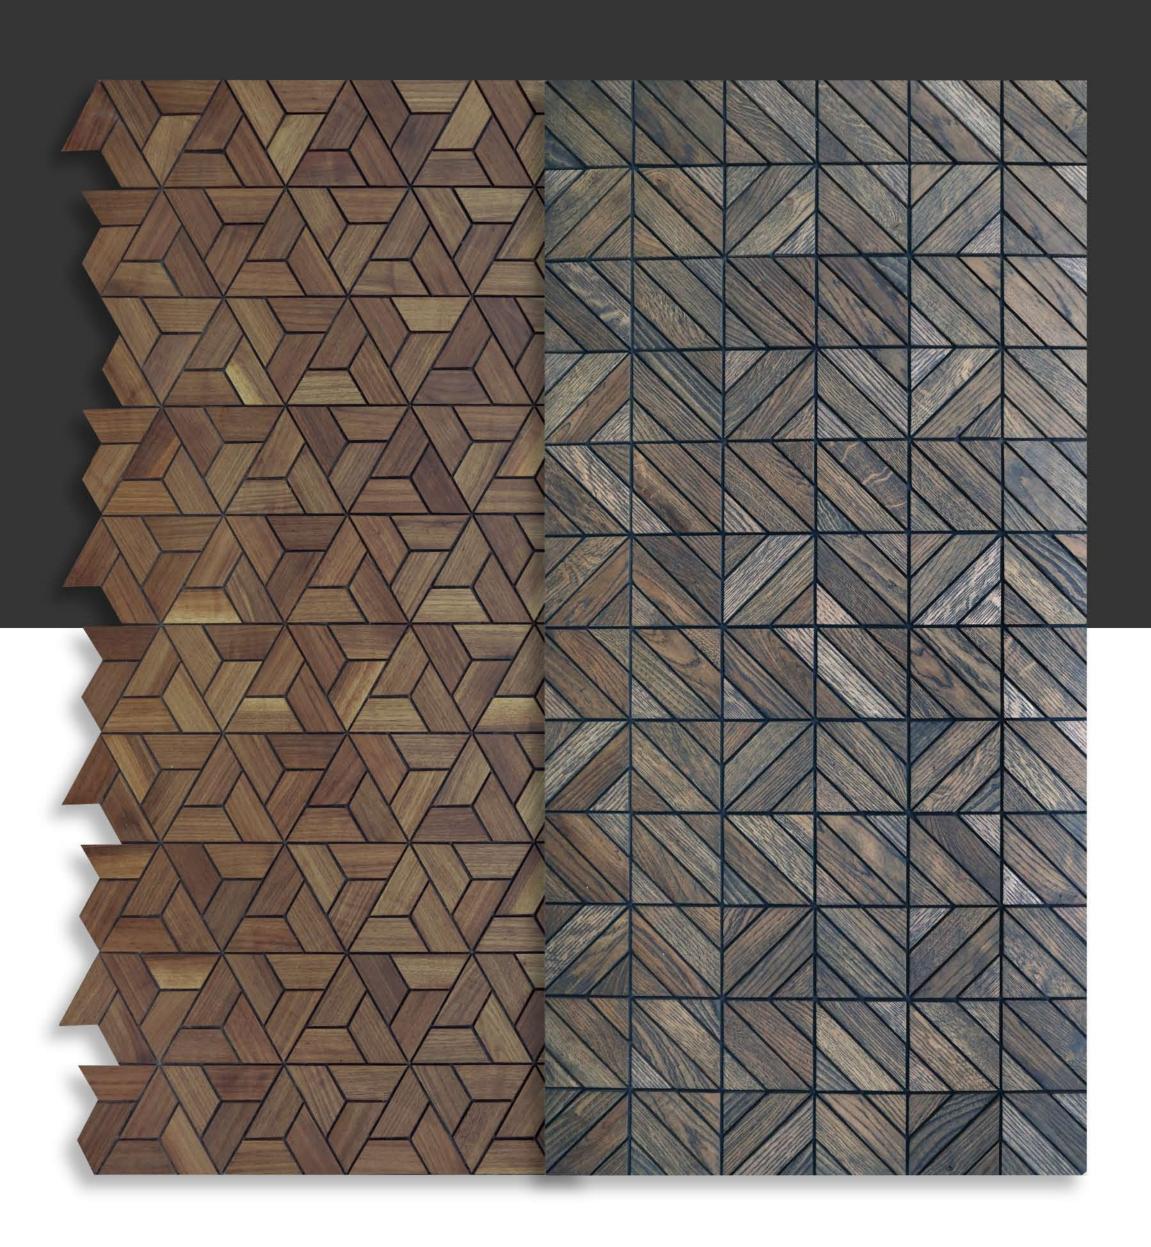


BIGGER SCALE OF DESIGN

TD Walls presents designs that use bigger size of individual wood pieces. This philosophy facilitates the use of the product on bigger sized wall covering applications. Stringent quality control measures ensure that stability of bigger size wood pieces is not compromised.





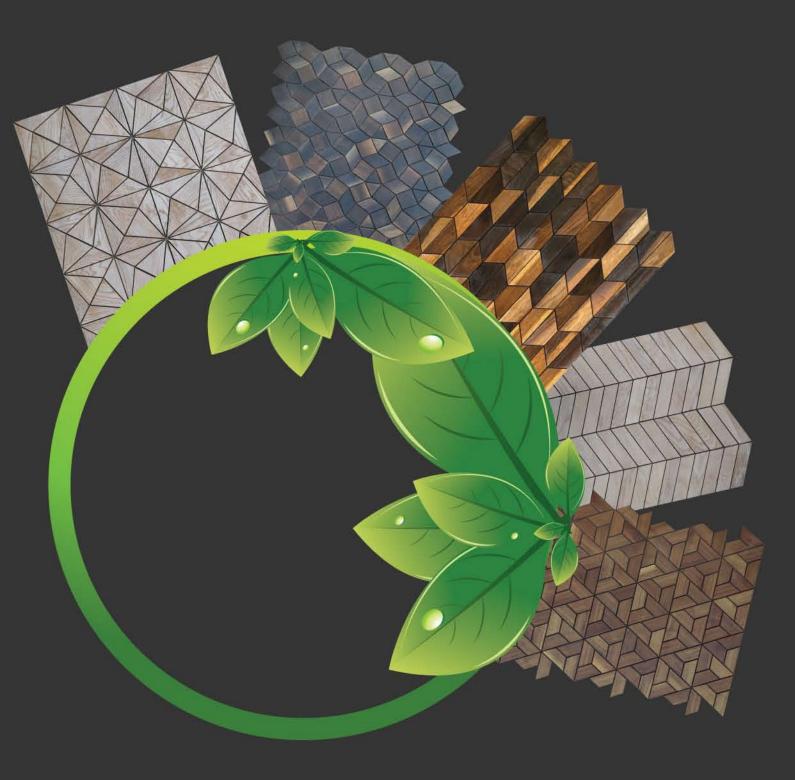

friendly

ECO FRIENDLY

TD Walls is produced from logs that were felled already; but were found to be not suitable for standard furniture use. This makes the product completely ecofriendly as it does not damage the environment by cutting down additional trees.

ASTER

Aster is a bold design that livens up the interior spaces in a striking manner. Selected color tones are offered to go with the flow of a vivid theme.



TECHNICAL DETAILS


Wood Pieces Per Panel : 240
Panels Per Box : 4
Weight per Panel : 2.7 kg
Groove Size (mm) : 2.5 mm

Weight per Panel
Groove Size (mm)
Out-to-Out Panel Size (mm)
Out-to-In Panel Size (mm)
Coverage in Square Feet
Thickness of Wood (mm)

Backing Finish ze (mm) : 1273 mm X 586 mm re Feet : 8 rd (mm) : 6 mm : Polyester Fabric : Pre - Oiled


: 1273 mm X 658 mm


658 mm 586 mm






Scan

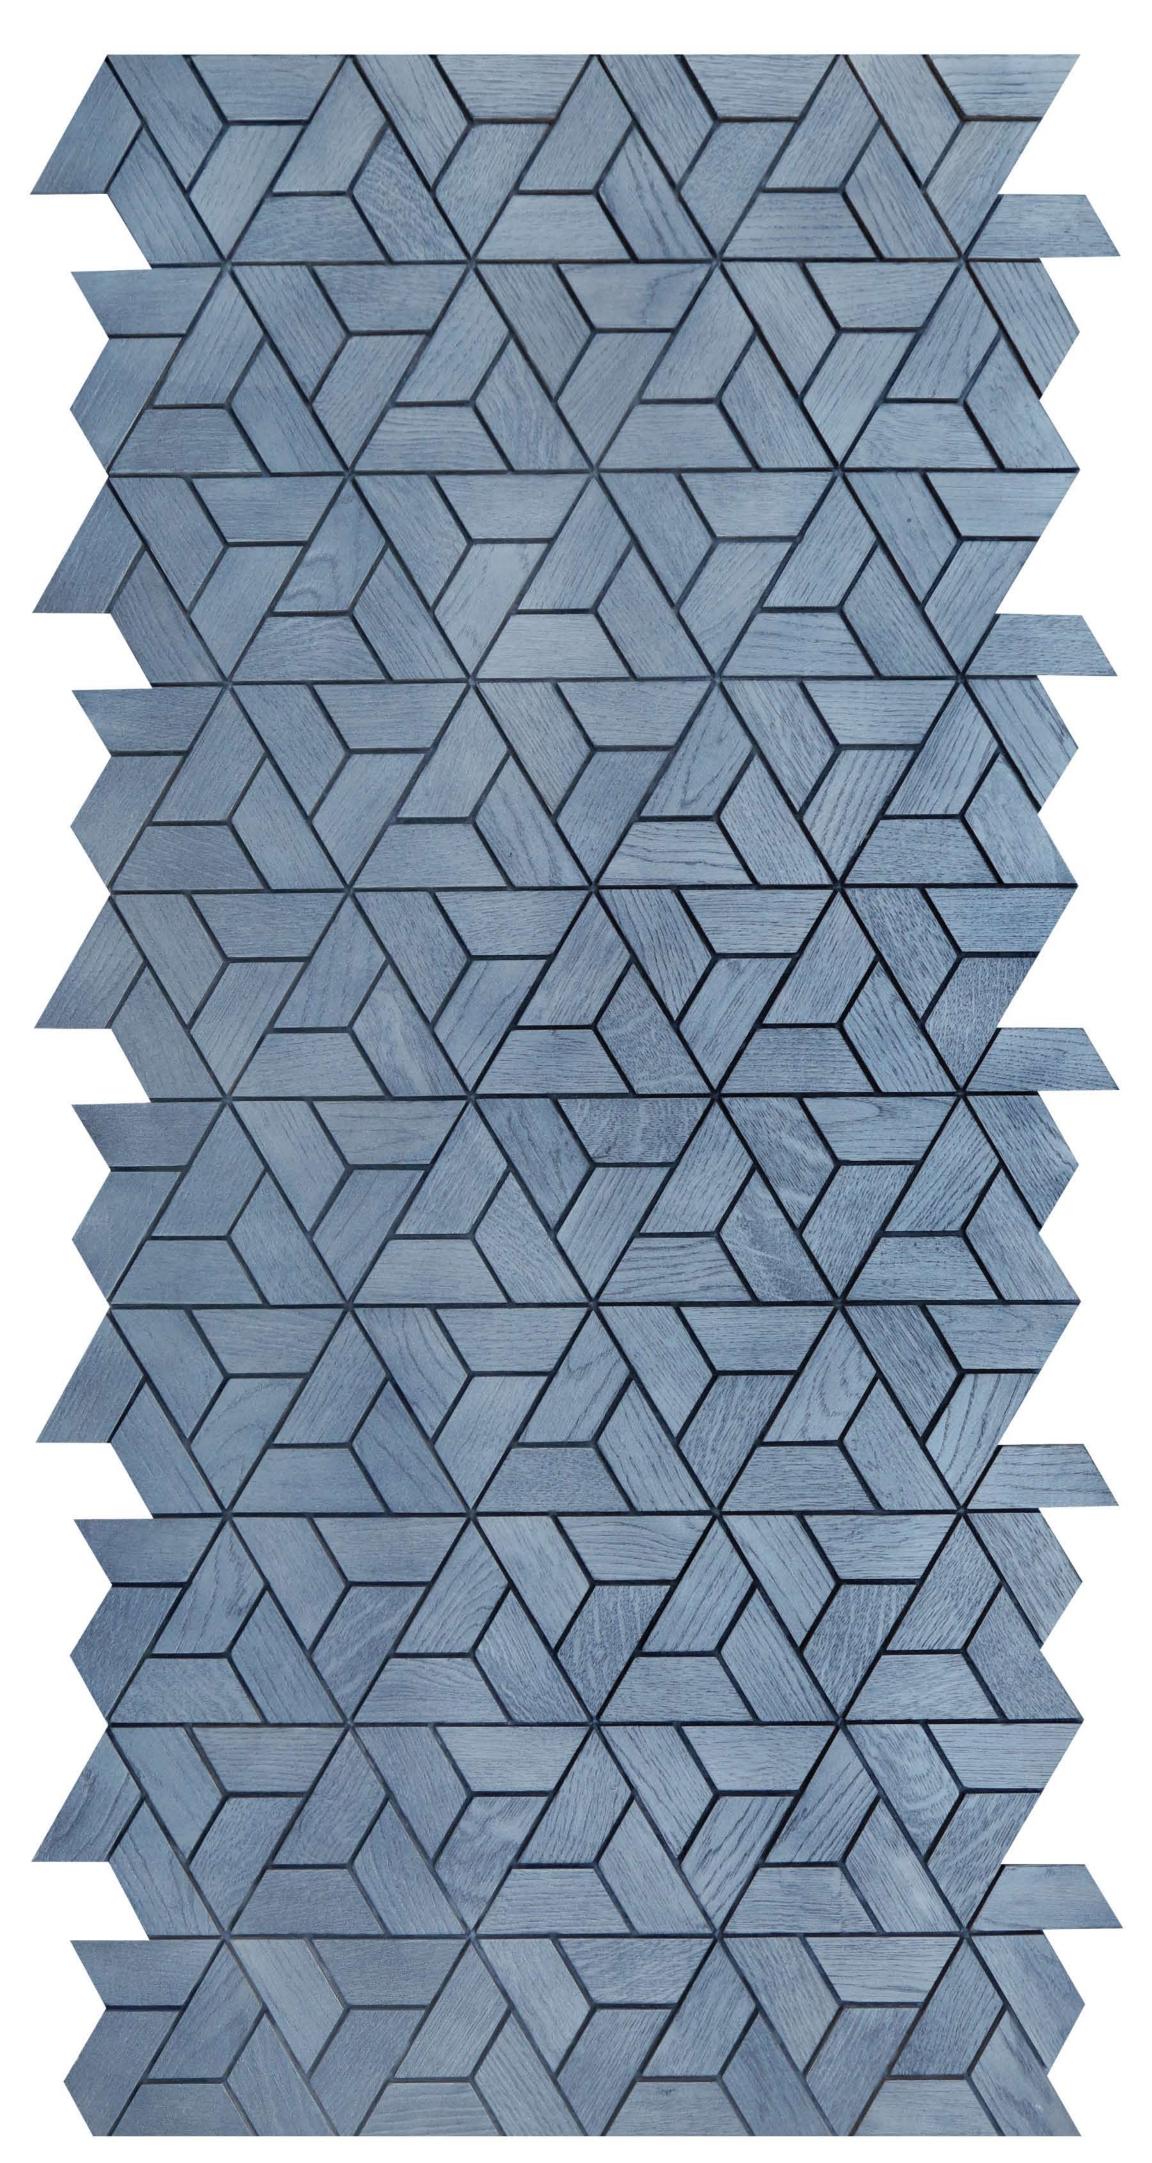

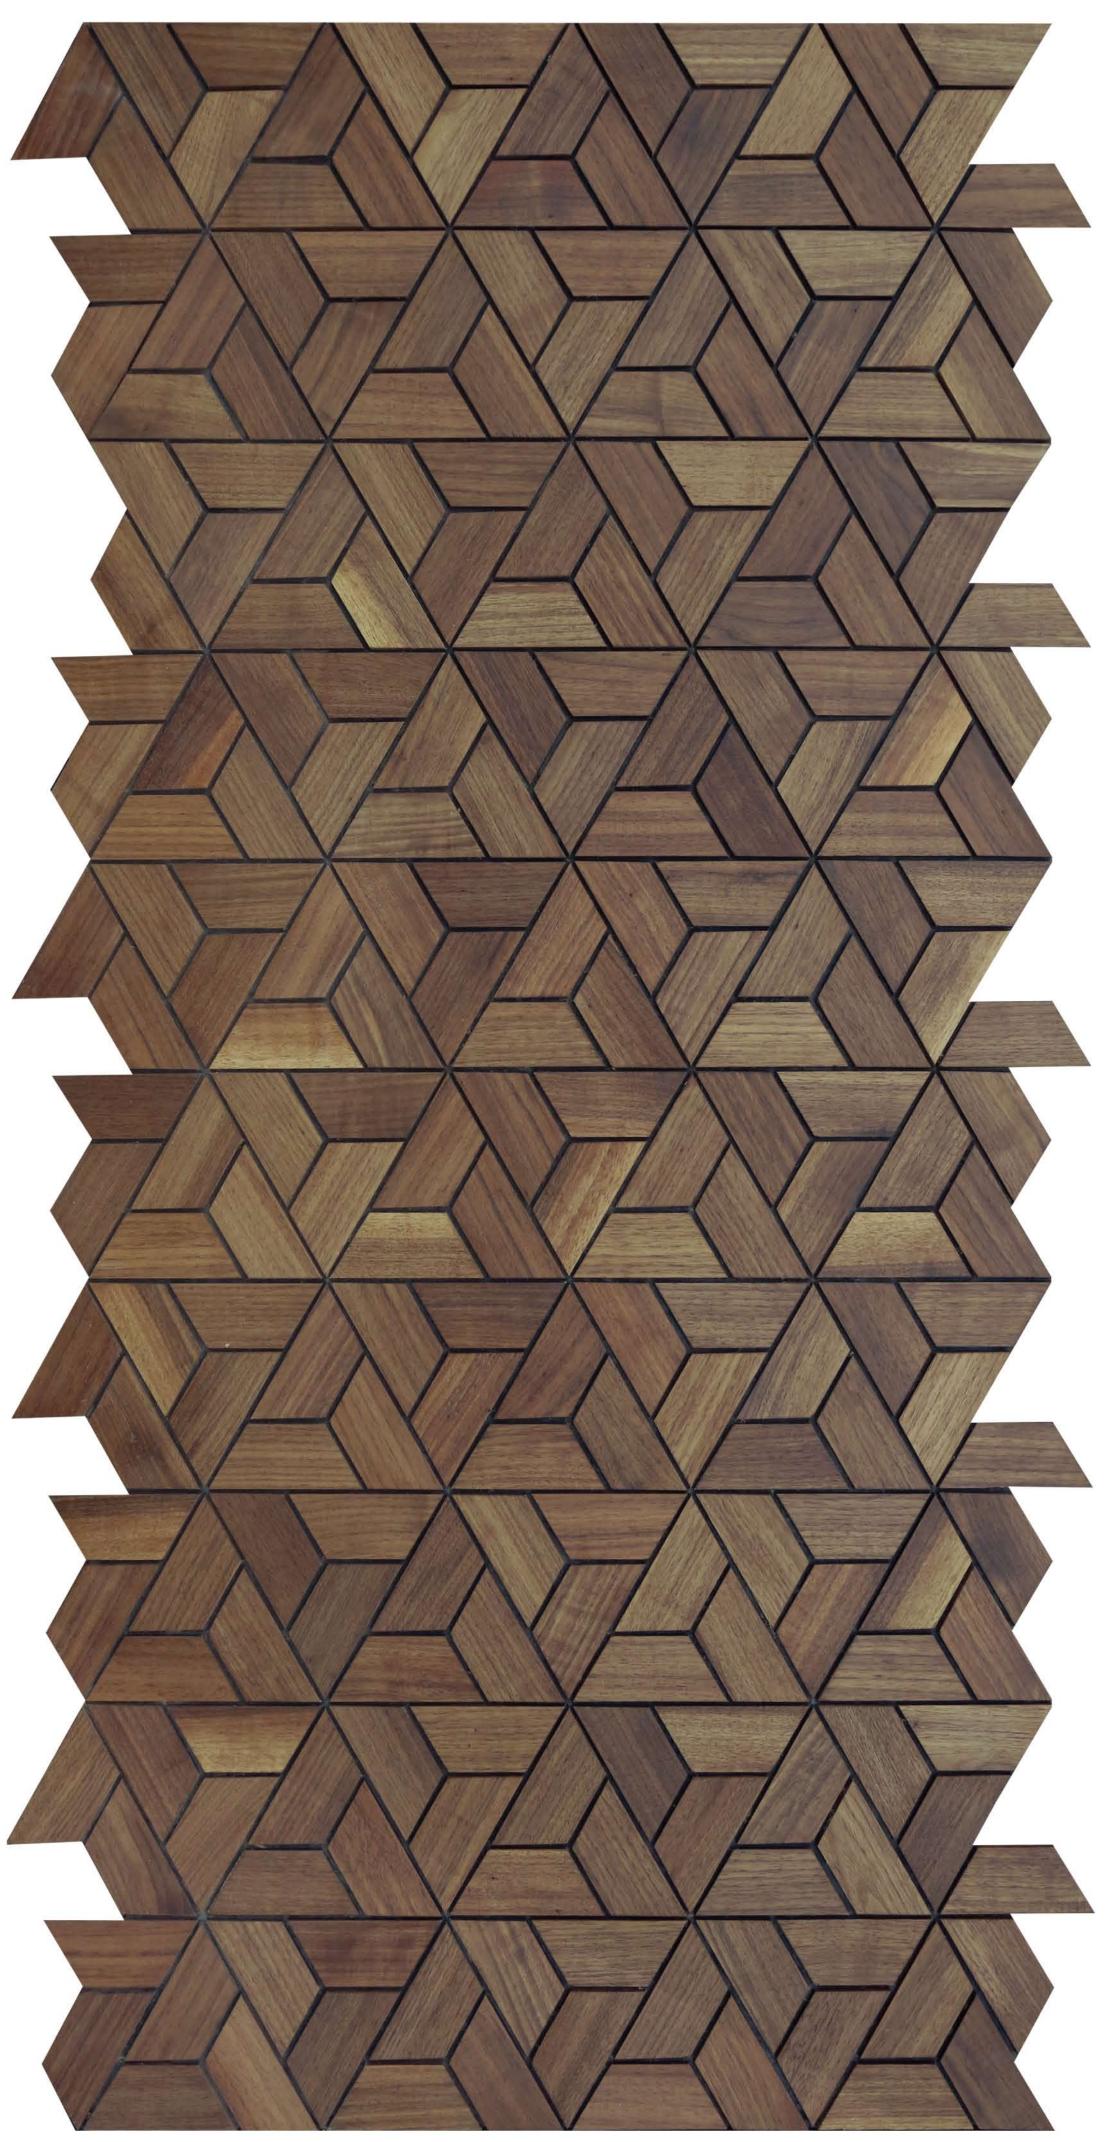

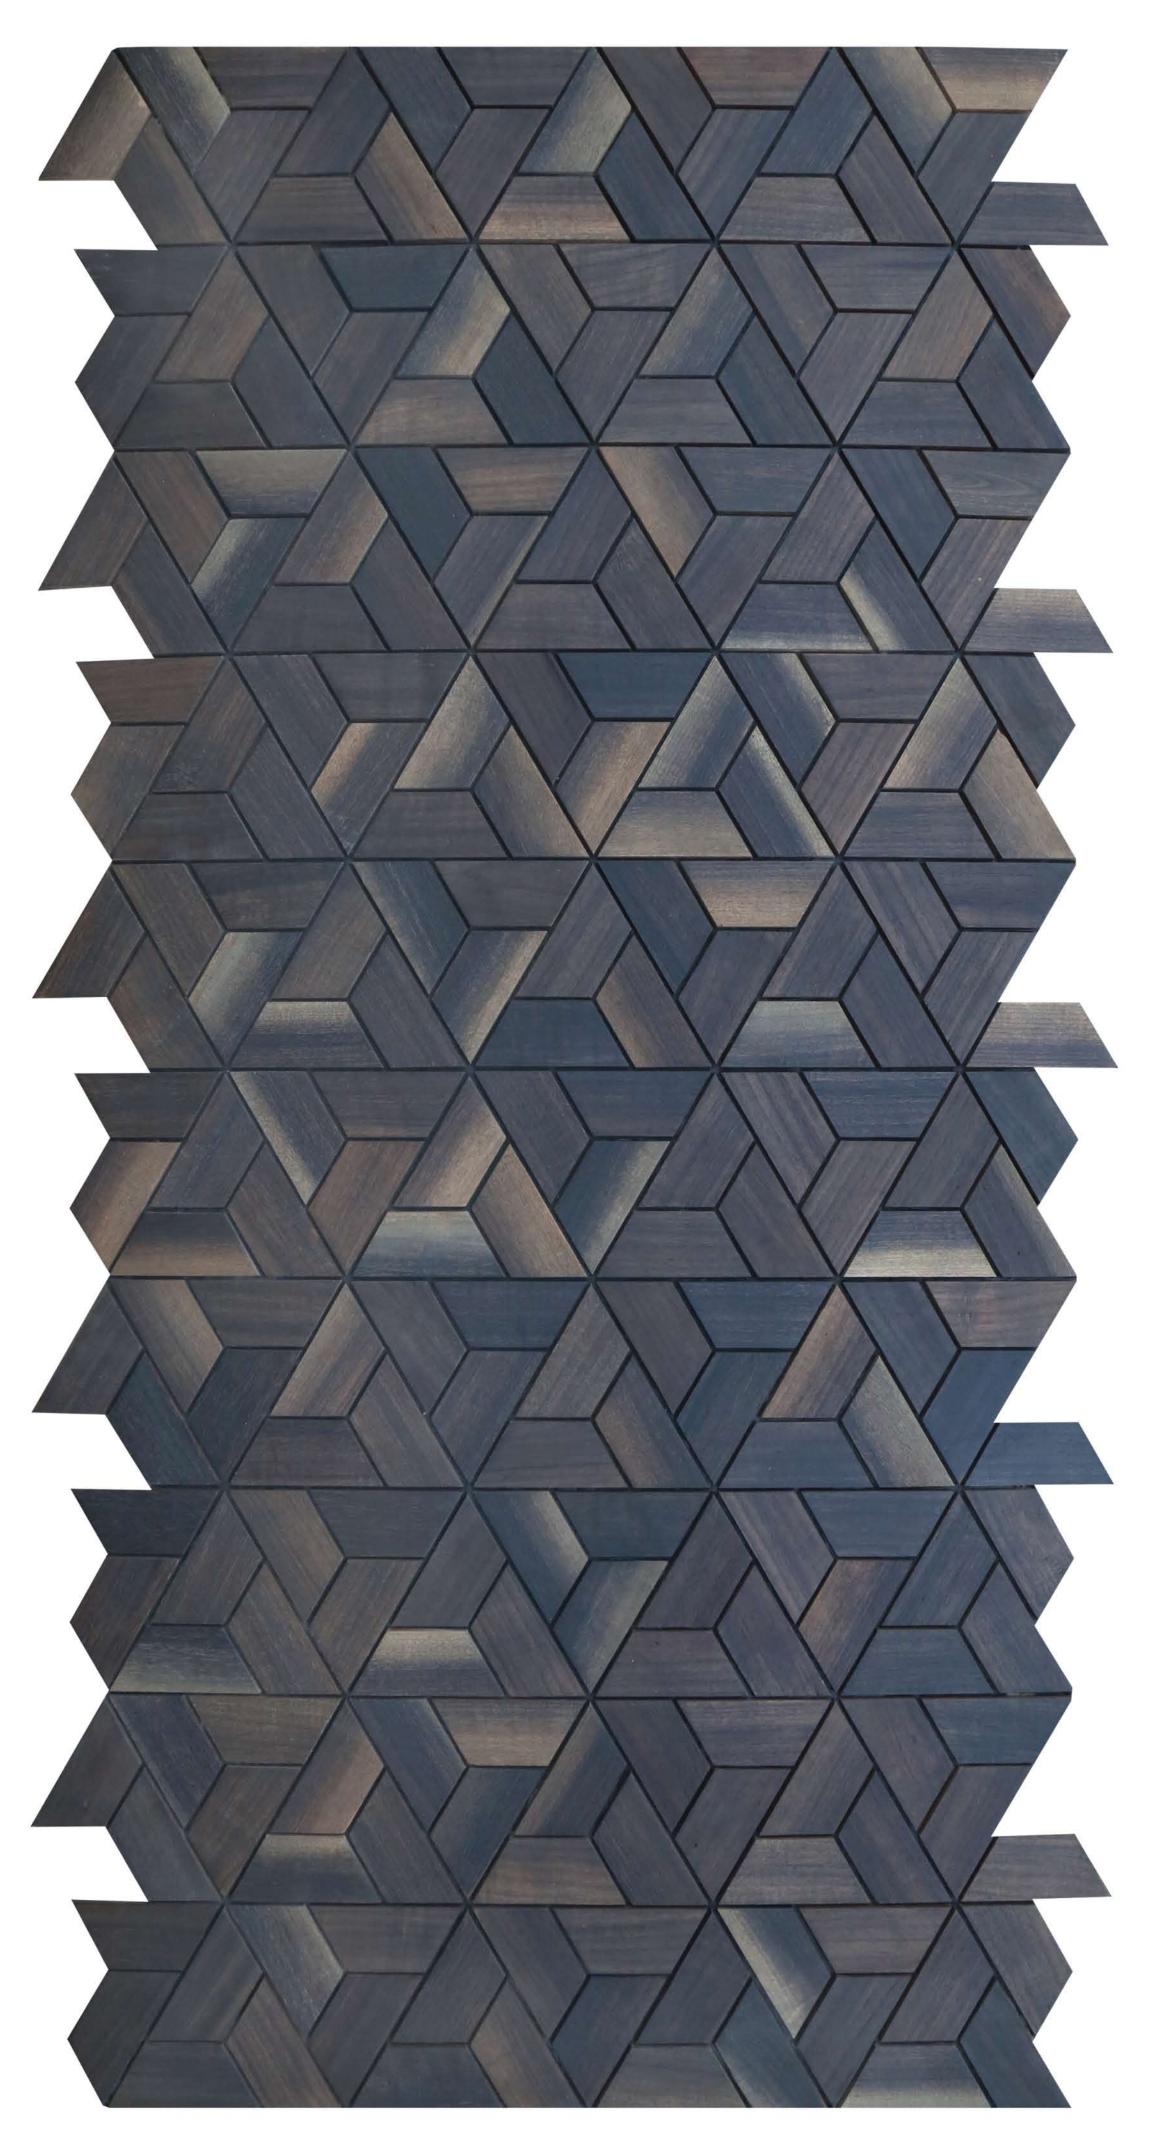

CLOVER

Clover is an astonishing design that creates a marvelous geometry in wood cladding. Unique by its distinctive placement pattern; Clover series point towards the zenith in interiors.



TECHNICAL DETAILS

Wood Pieces Per Panel
Panels Per Box
Weight per Panel
Groove Size (mm)
Outsto-Out Panel Size (mm)


Out-to-Out Panel Size (mm)
Out-to-In Panel Size (mm)
Coverage in Square Feet
Thickness of Wood (mm)


Thickness of Wood (mm)
Backing
Finish

: 288 : 4 : 2.5 kg

: 2.5 mm : 1223 mm X 610 mm : 1223 mm X 610 mm


: 8 : 6 mm : Polyester Fabric : Pre - Oiled

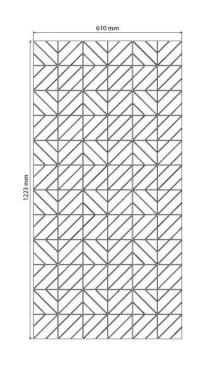







Scan

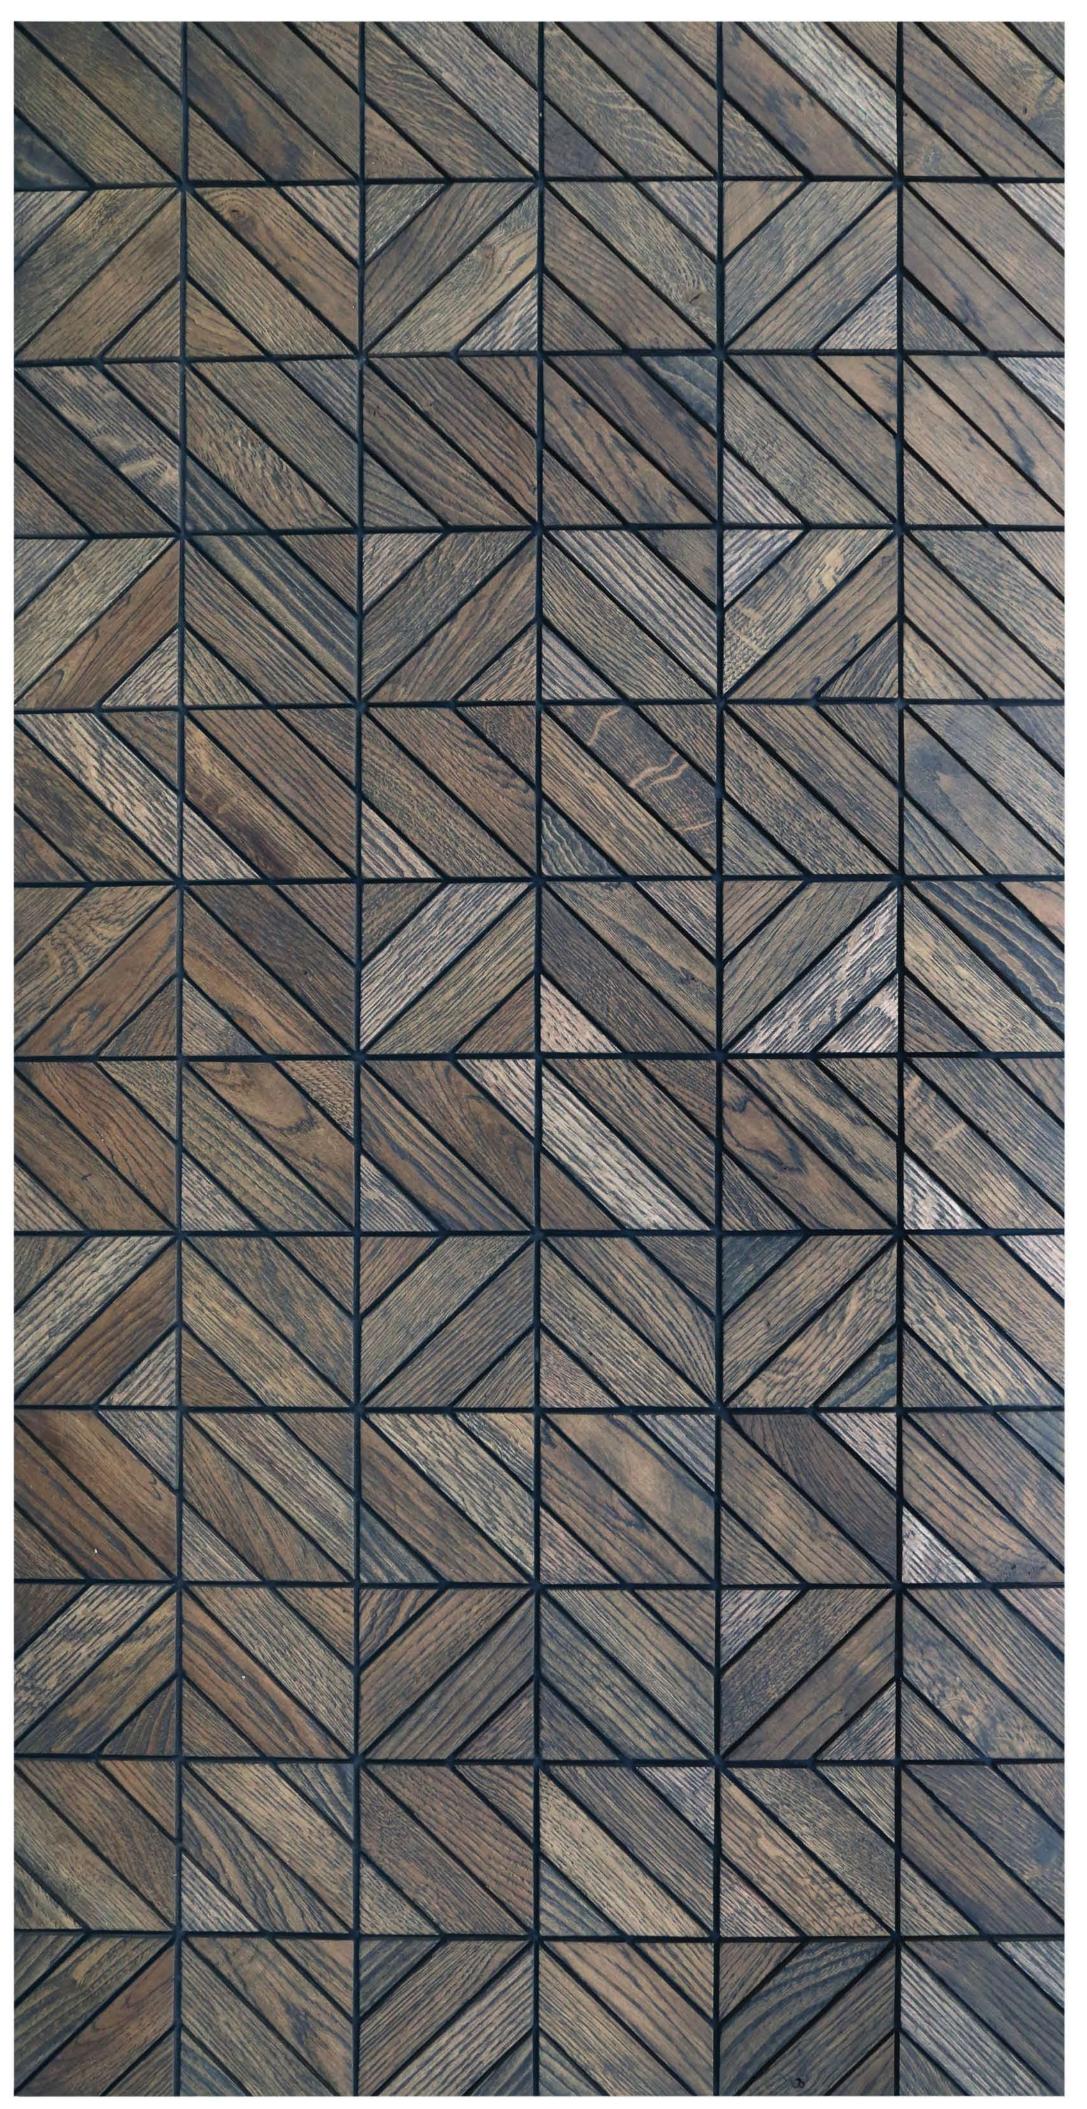


Product Code : CLV-01.3

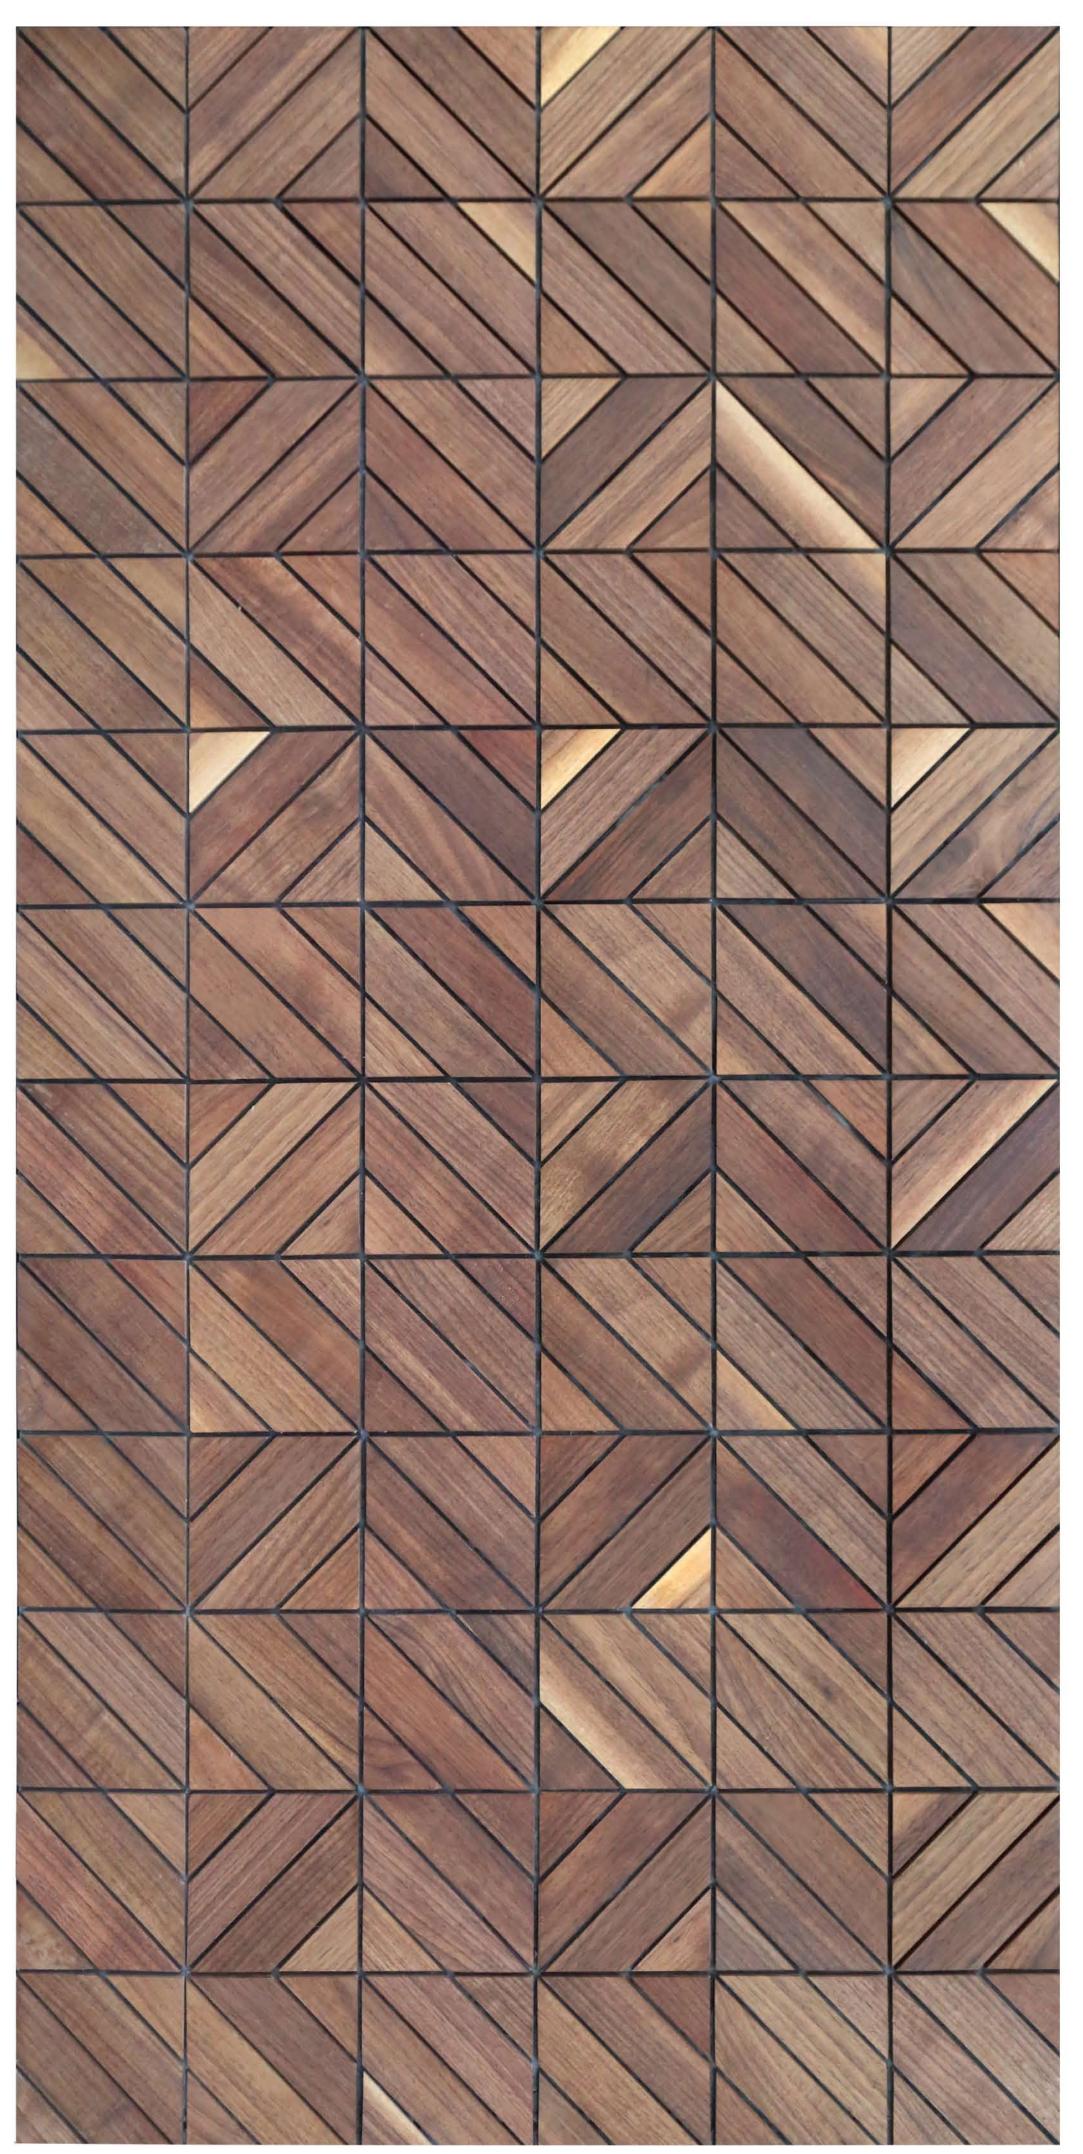

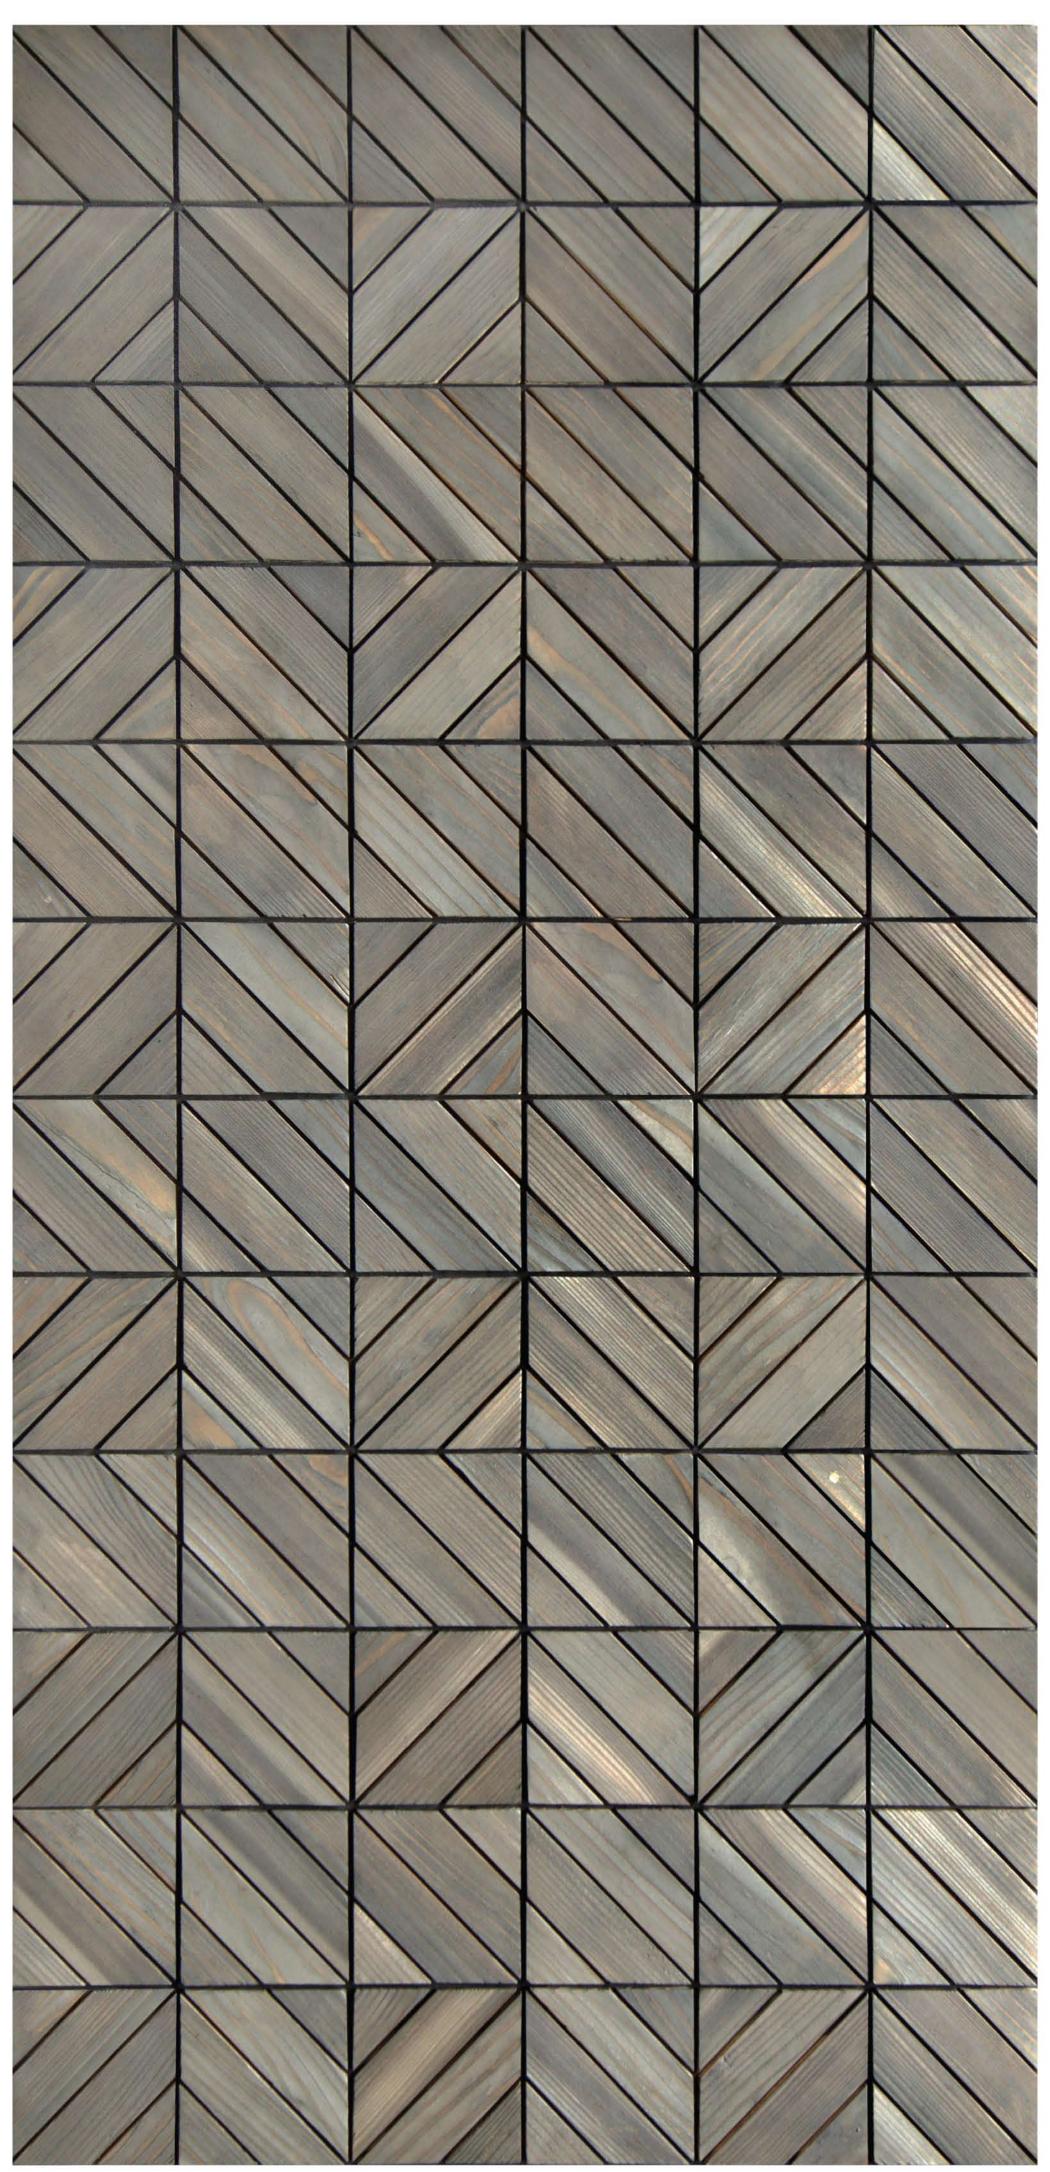

QUINCE

Quince design ventures into elite simplicity. Absolutely effortless and flawless when it comes to integration with other elements of interior spaces.

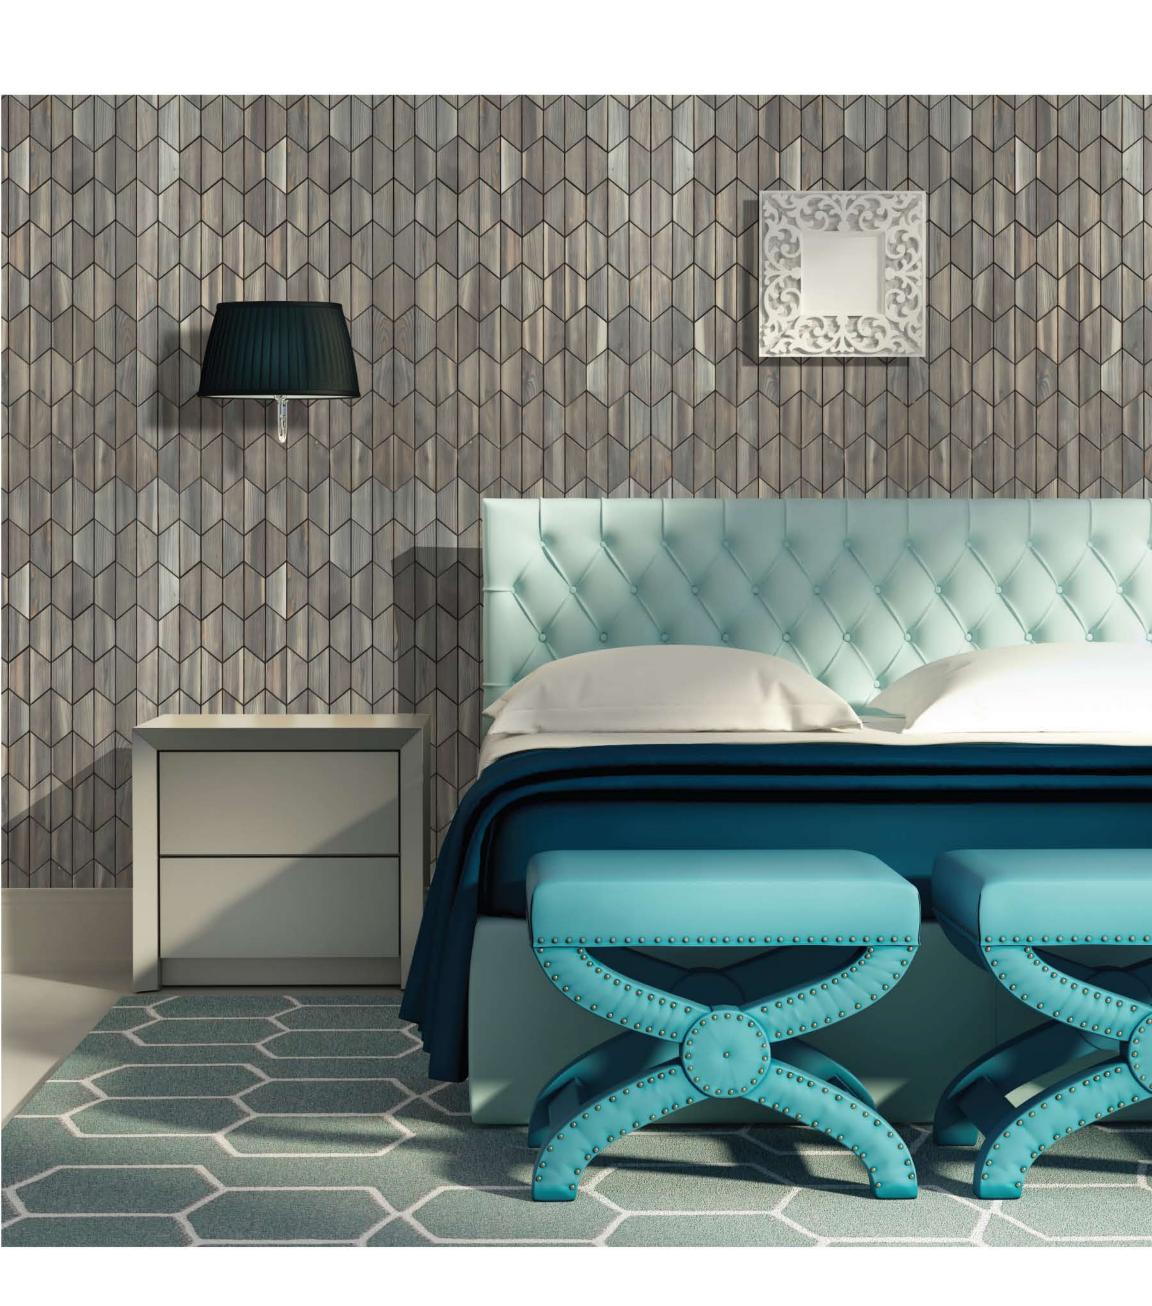

TECHNICAL DETAILS

Wood Pieces Per Panel
Panels Per Box
Weight per Panel
Groove Size (mm)
Out-to-Out Panel Size (mm)

Out-to-Out Panel Size (mm)
Out-to-In Panel Size (mm)
Coverage in Square Feet
Thickness of Wood (mm)


Thickness of Wood (mm)
Backing
Finish


: 144 : 4 : 2,5 kg

: 2.5 mm : 1257 mm X 613 mm : 1216 mm X 613 mm

: 8 : 6 mm

: Polyester Fabric : Pre - Oiled

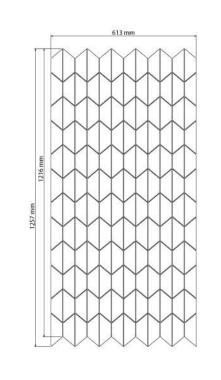






Scan



Product Code : QNC-03.2

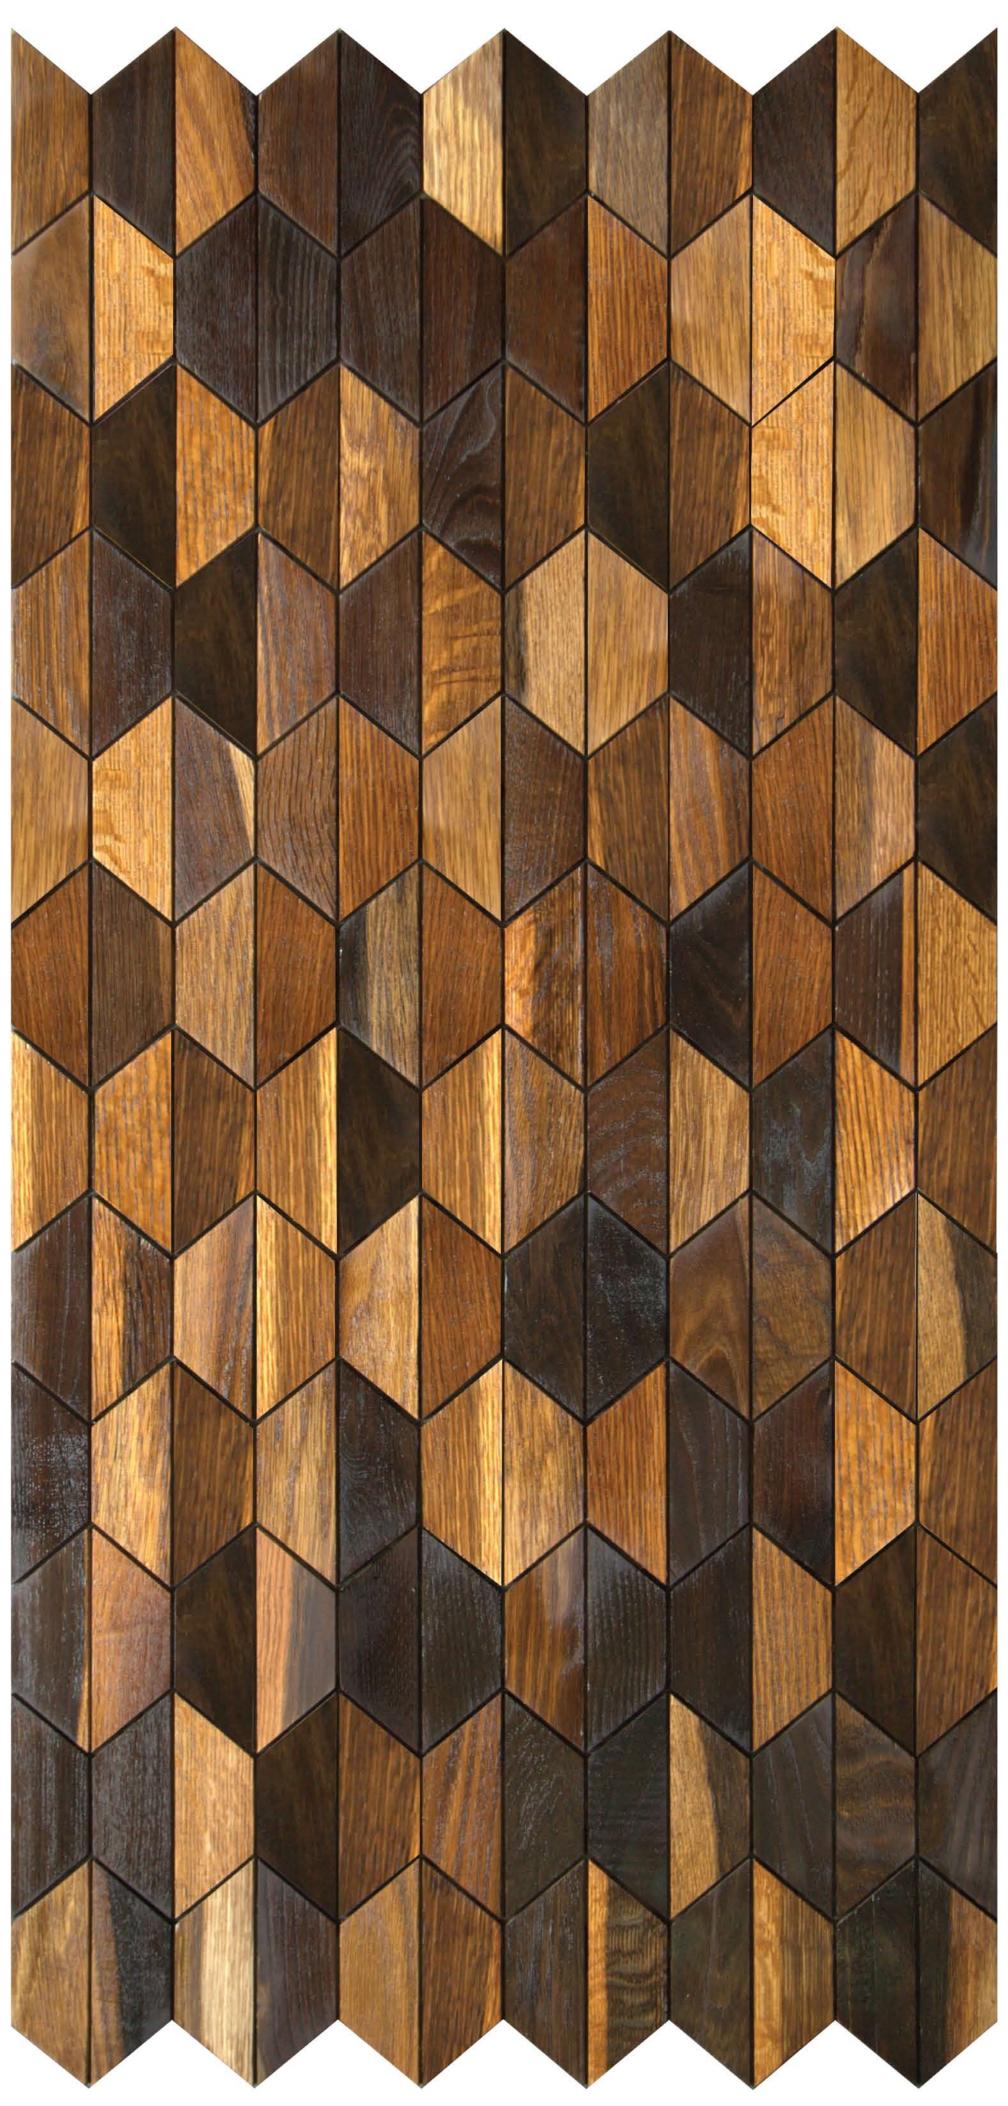

Product Code : QNC-01.1



Product Code : QNC-01.6

ERICA


Erica design configuration adds mystical colors to the interior landscape. It offers beauty with little work when composing creations. Using Erica is easy as it seamlessly integrates into modern design boards.



TECHNICAL DETAILS

Wood Pieces Per Panel
Panels Per Box
Weight per Panel
Groove Size (mm)
Out-to-Out Panel Size (mm)
Out-to-In Panel Size (mm)
Coverage in Square Feet
Thickness of Wood (mm)
Backing

anel : 192 : 4 : 2.7 kg : 2.5 mm ze (mm) : 1272 mm X 658 mm e (mm) : 1221 mm X 610 mm e Feet : 8 (mm) : 6 mm : Polyester Fabric : Pre - Oiled 1221 mm 610 mm







Scan

Finish



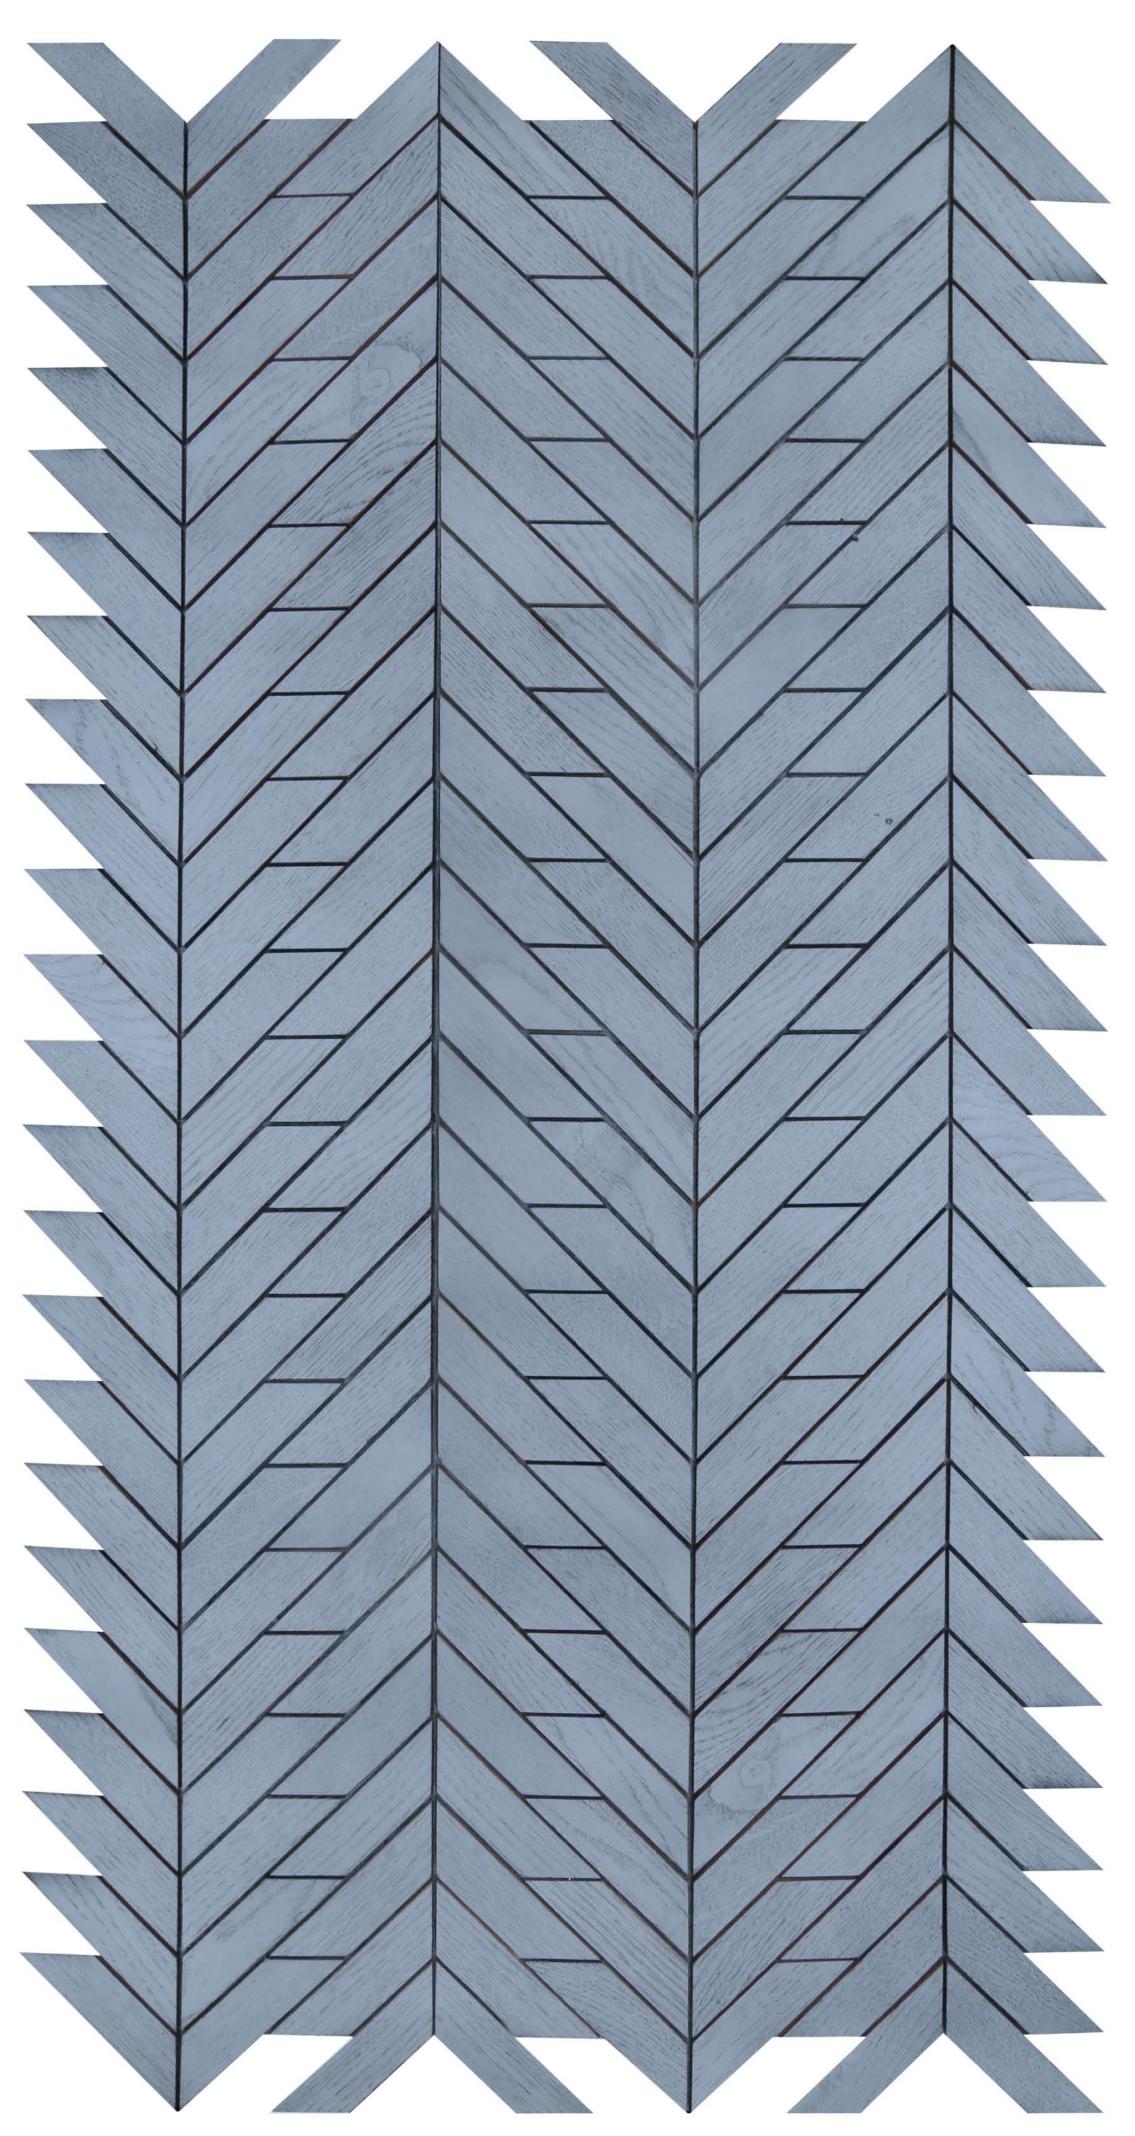

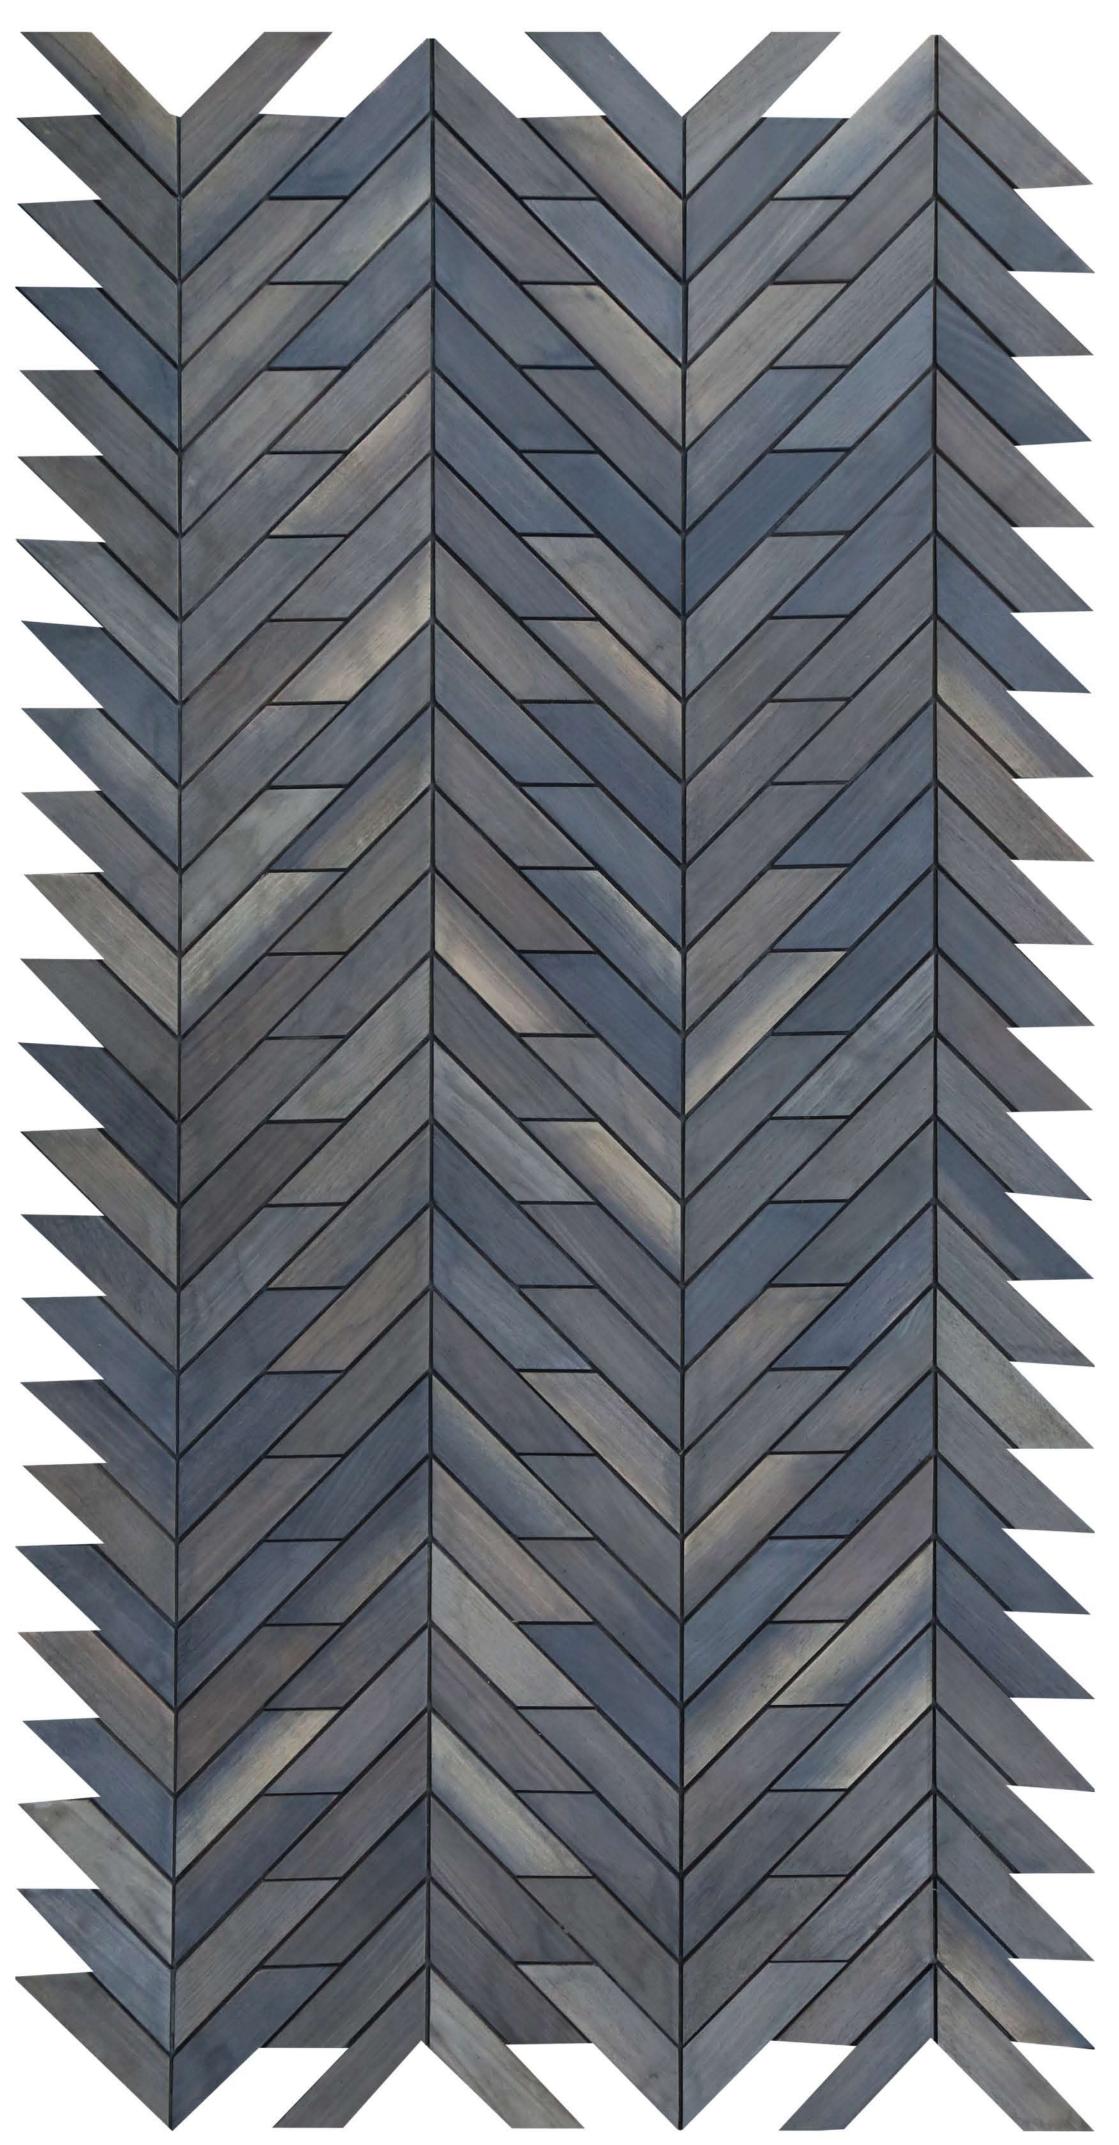

FREESIA

Our Freesia design earnestly combines the most favored herringbone pattern with the charm and grace of wood. It appeals and fascinates designers through its magnificent colors and scale; which is no less than an amazing work of art.



TECHNICAL DETAILS


Wood Pieces Per Panel
Panels Per Box
Weight per Panel
Groove Size (mm)
Out-to-Out Panel Size (mm)

Out-to-Out Panel Size (mm)
Out-to-In Panel Size (mm)
Coverage in Square Feet
Thickness of Wood (mm)

Backing Finish : 88 : 4 : 2.8 kg : 2.5 mm


: 1297 mm X 606 mm : 1227 mm X 606 mm


: 8 : 6 mm : Polyester Fabric : Pre - Oiled

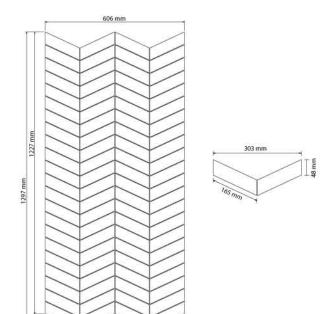




Scan

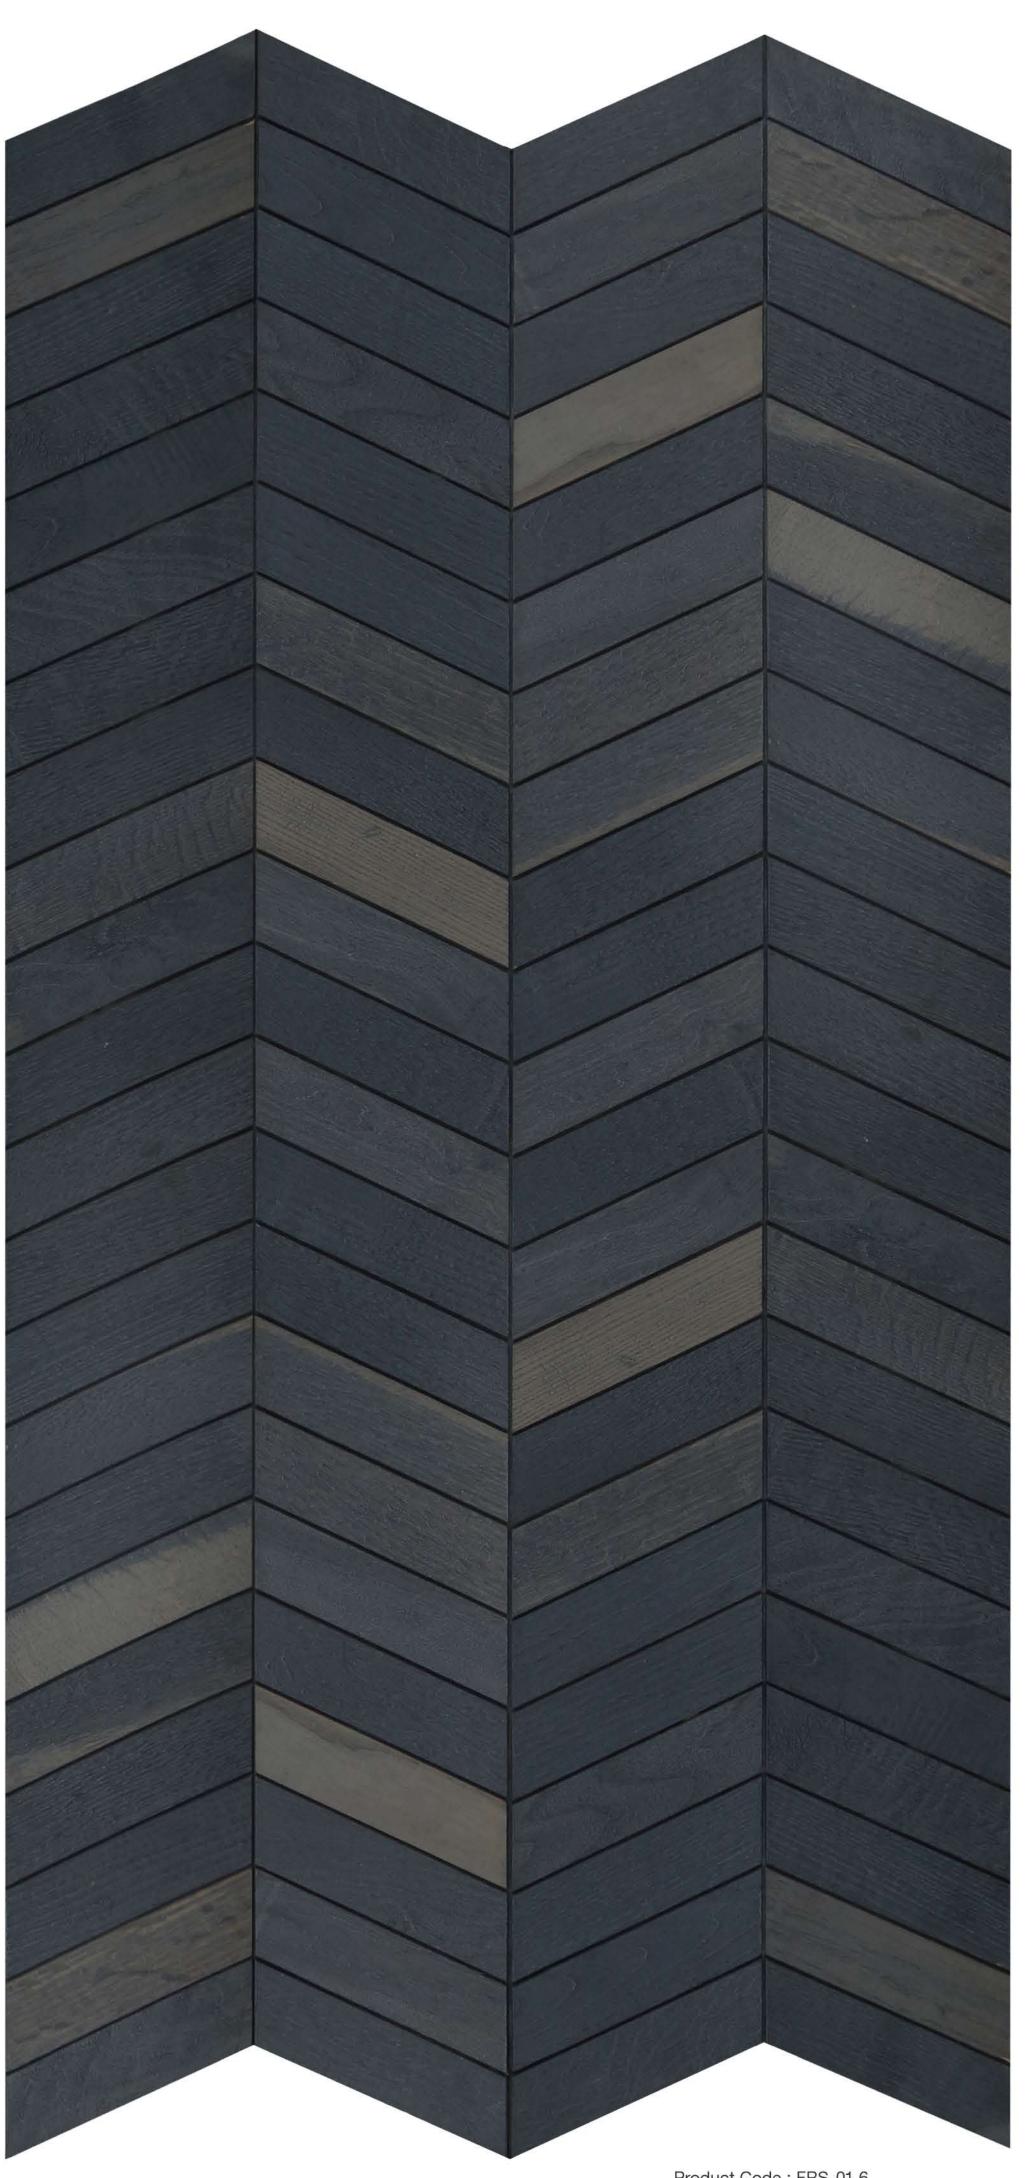

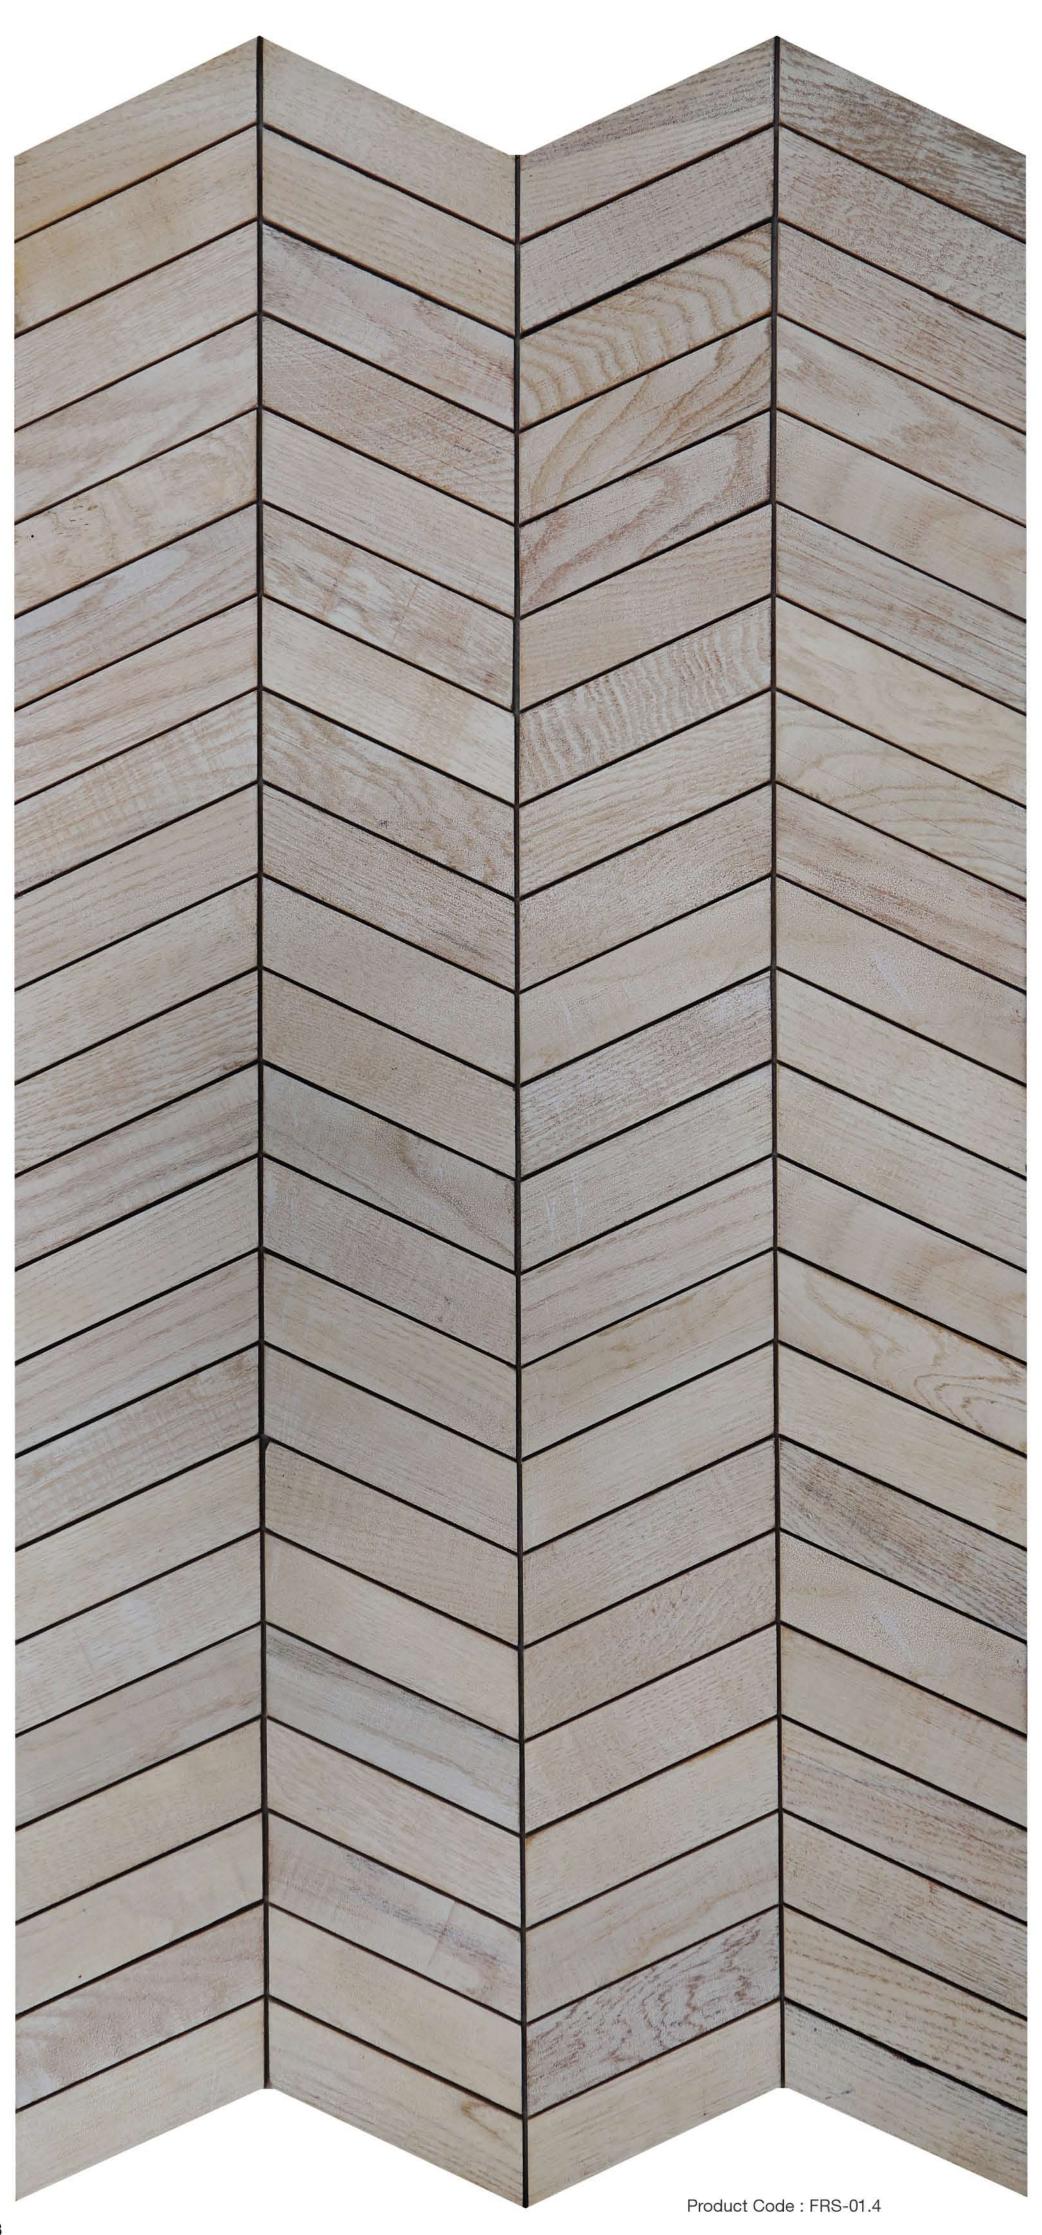

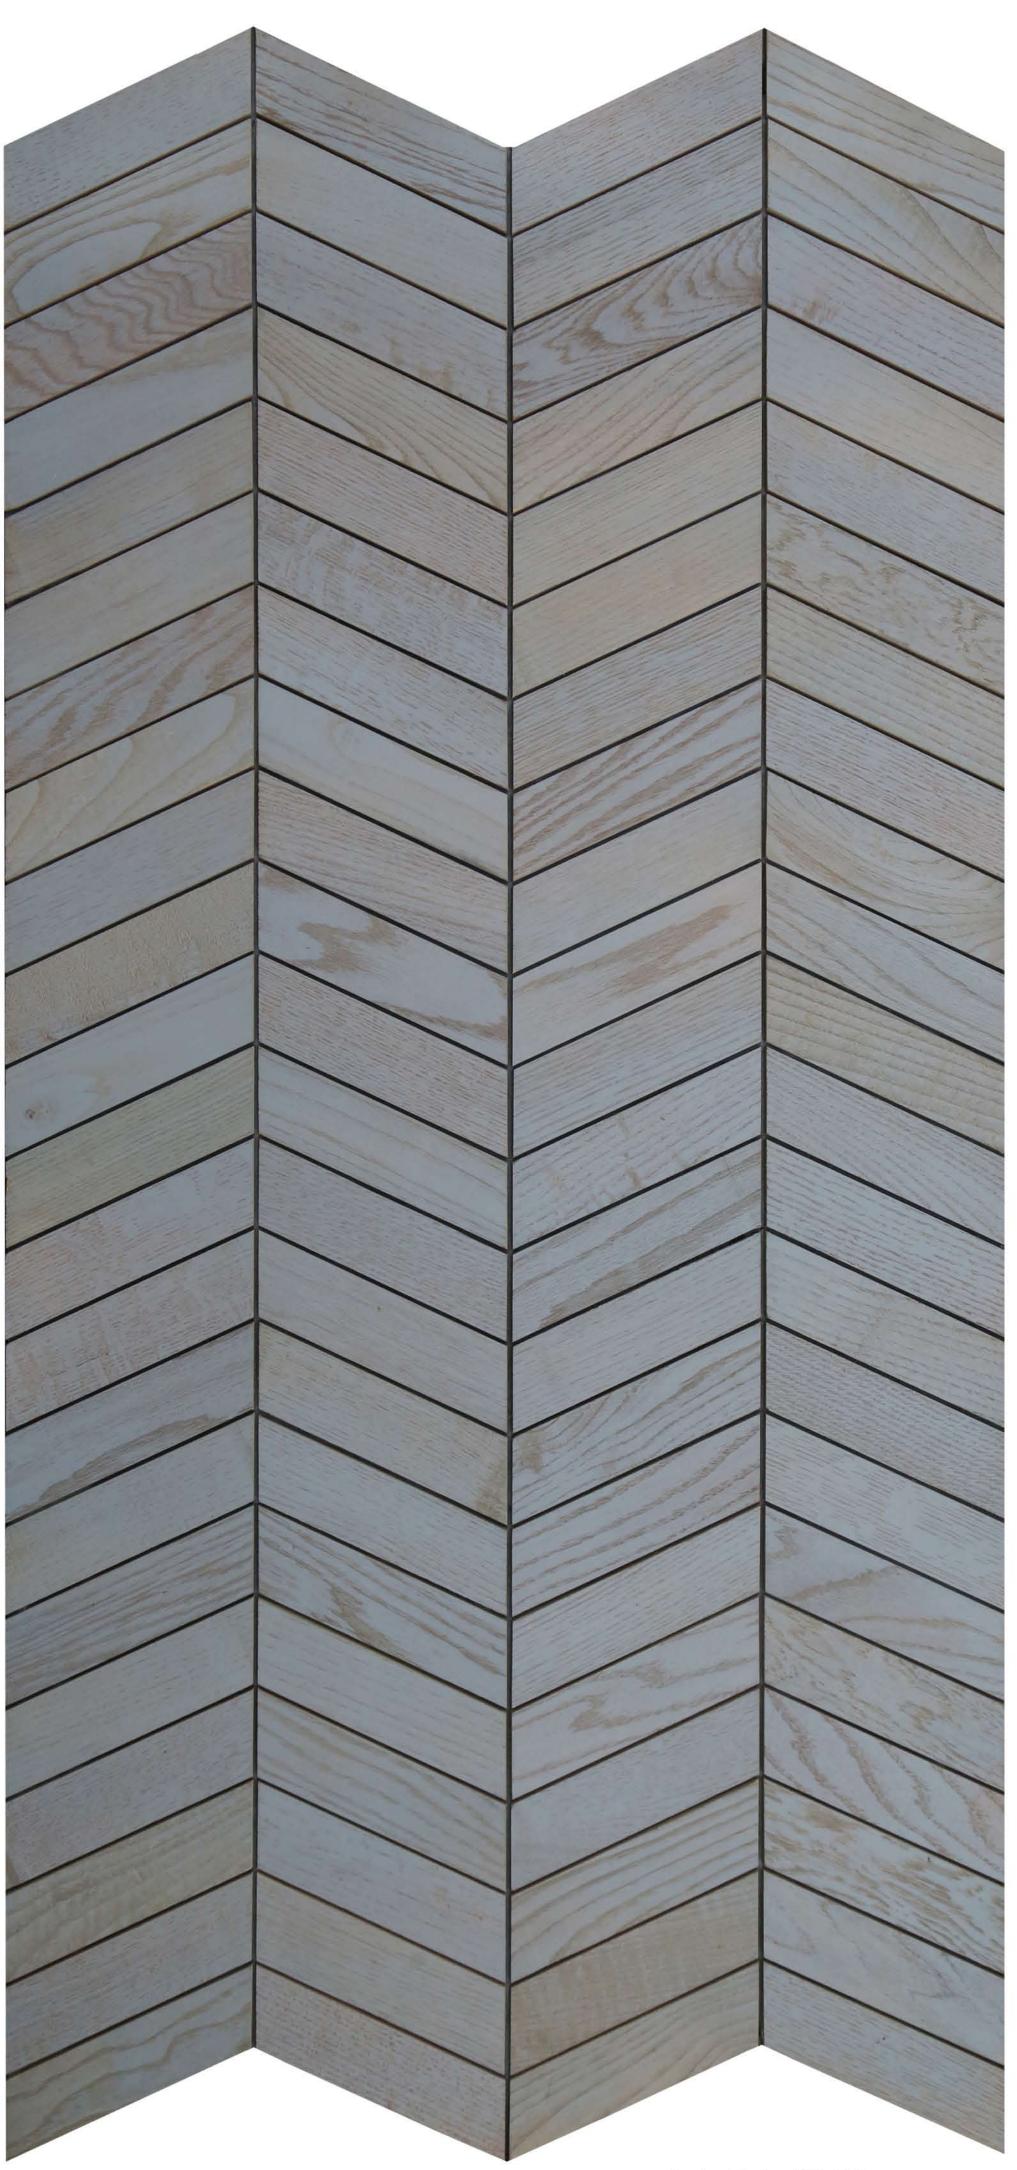

Product Code: FRS-01.5

GARDENIA

Gardenia design brings together the modern state of art and ultra-fine craftsmanship, that imparts absolute luxury to home interiors. A fascinating hexagon adds an intriguing dimension to interior design.



TECHNICAL DETAILS

Wood Pieces Per Panel
Panels Per Box
Weight per Panel
Groove Size (mm)


Out-to-Out Panel Size (mm)
Out-to-In Panel Size (mm)
Coverage in Square Feet

Coverage in Square Feet Thickness of Wood (mm) Backing : 288 : 4 : 2.5 kg : 2.5 mm : 1250 mm X 657 mm

: 1223 mm X 610 mm

: 8 : 6 mm

: Polyester Fabric : Pre - Oiled

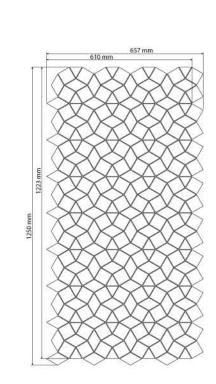







Scan

Finish



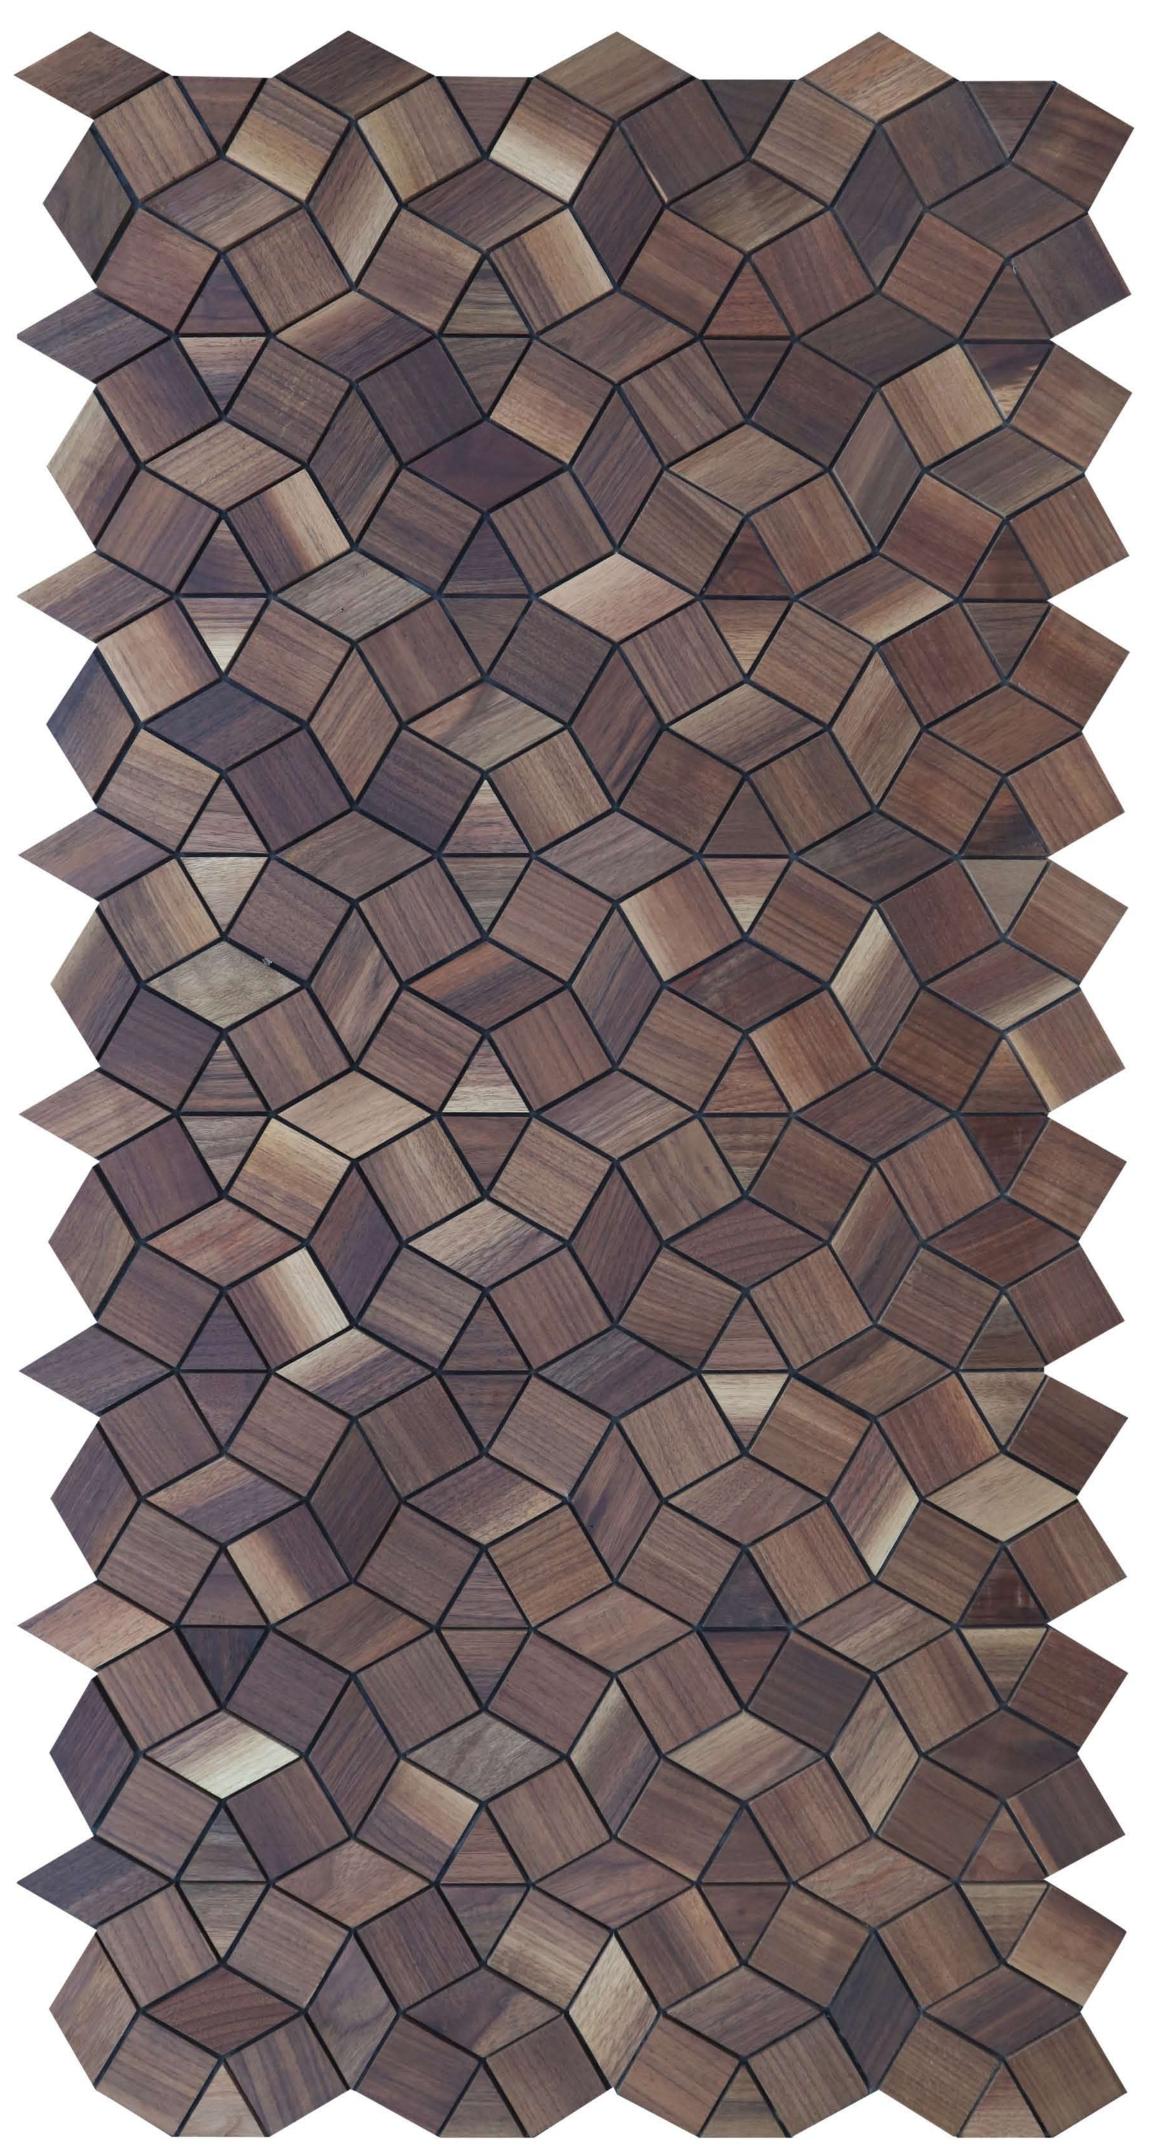

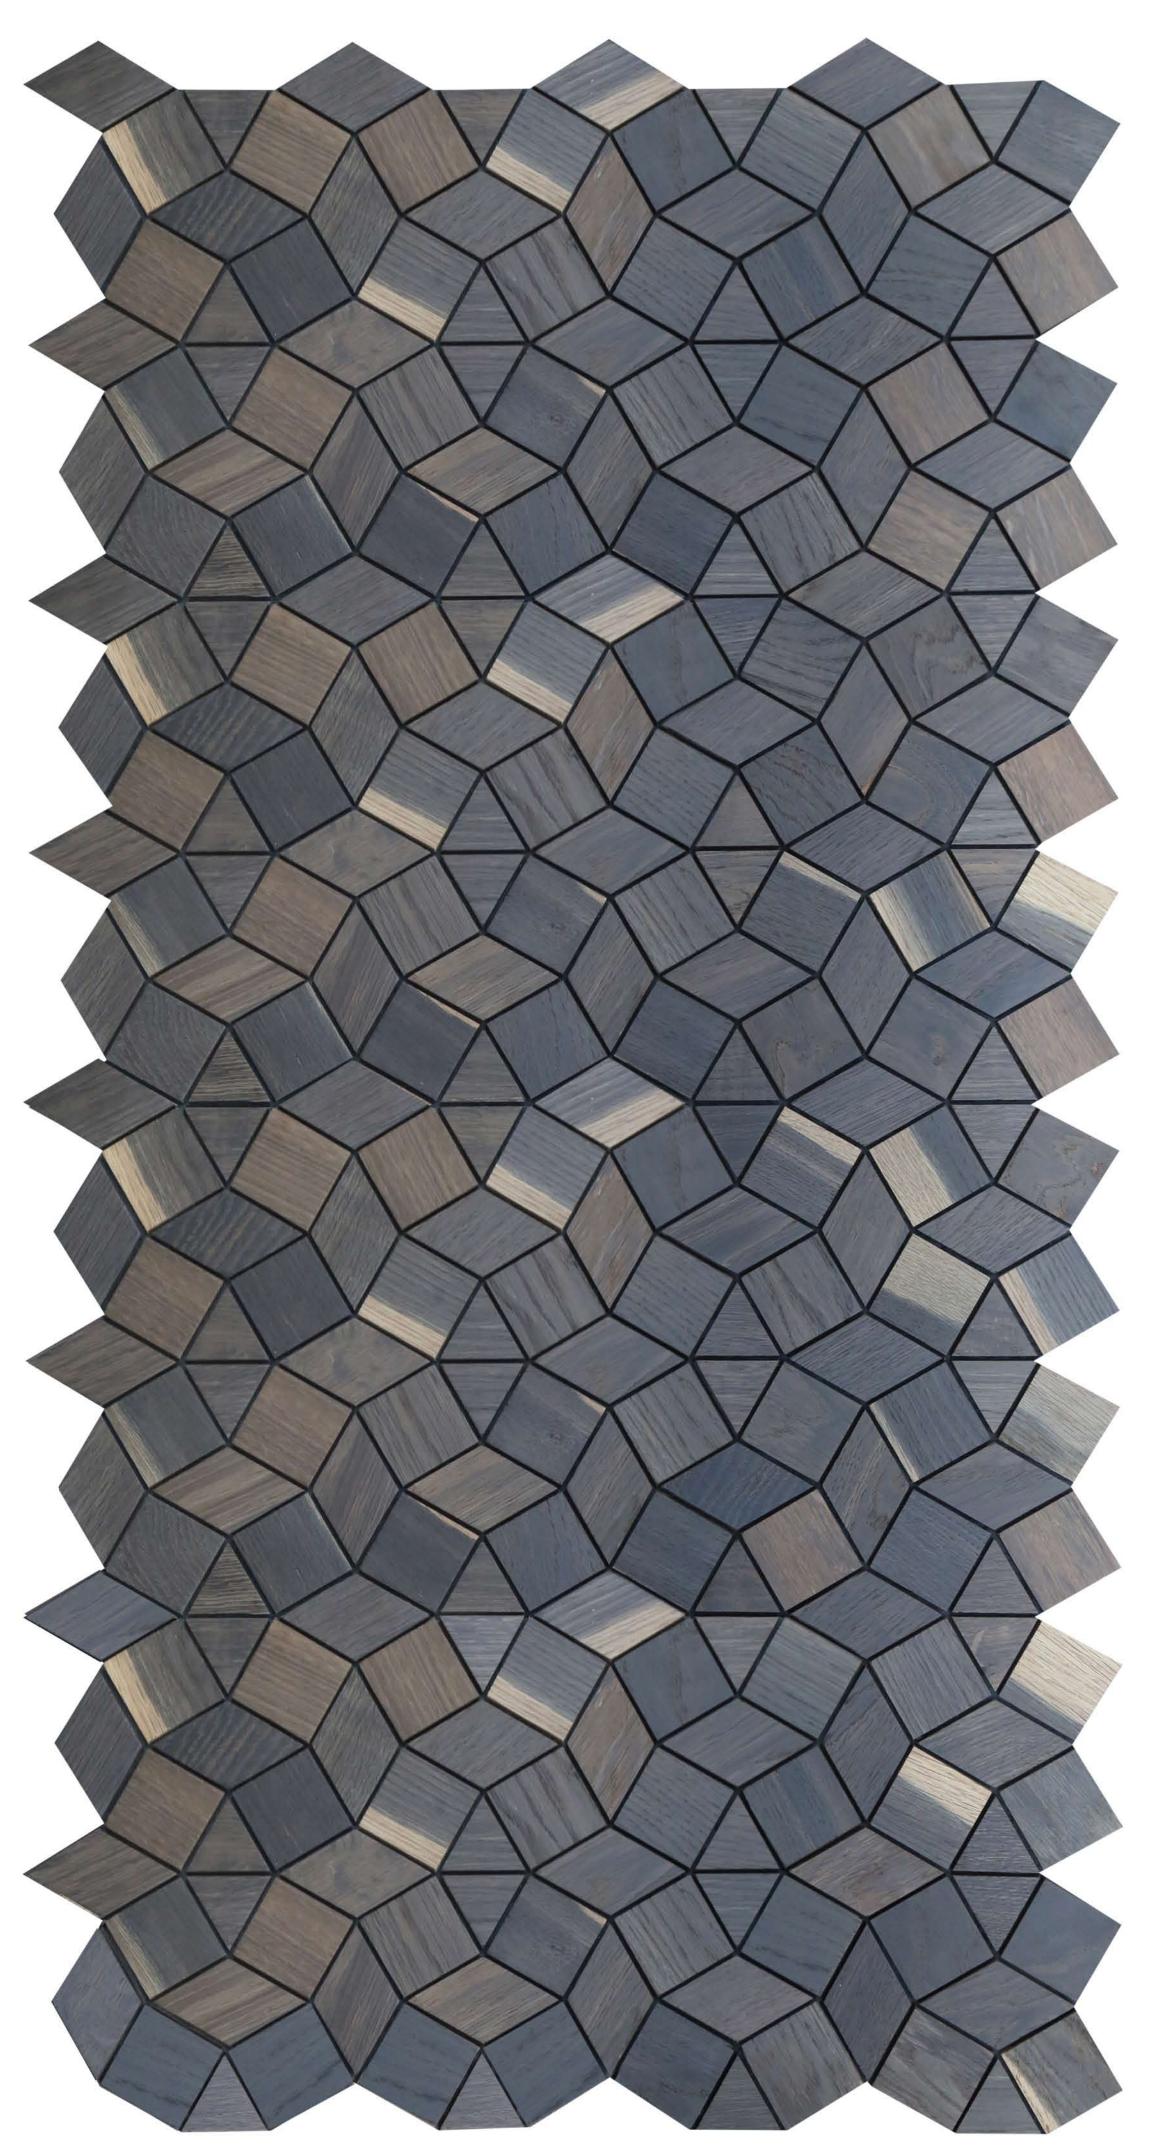

Product Code : GDN-01.1

NOLANA

Nolana design grants the pure splendour to indulge into the mesmerizing beauty of colored natural wood. It can elevate and transform home décor beyond imagination.



TECHNICAL DETAILS

Wood Pieces Per Panel Panels Per Box Weight per Panel Groove Size (mm)

Out-to-Out Panel Size (mm)
Out-to-In Panel Size (mm)

Coverage in Square Feet Thickness of Wood (mm) Backing

; 8 ; 6mm : Polyester Fabric : Pre - Oiled Finish


: 192


: 2.6 kg

: 2.5 mm

: 1223 mm X 610 mm : 1223 mm X 610 mm


: 4

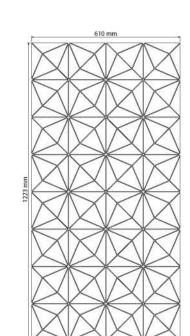







Scan

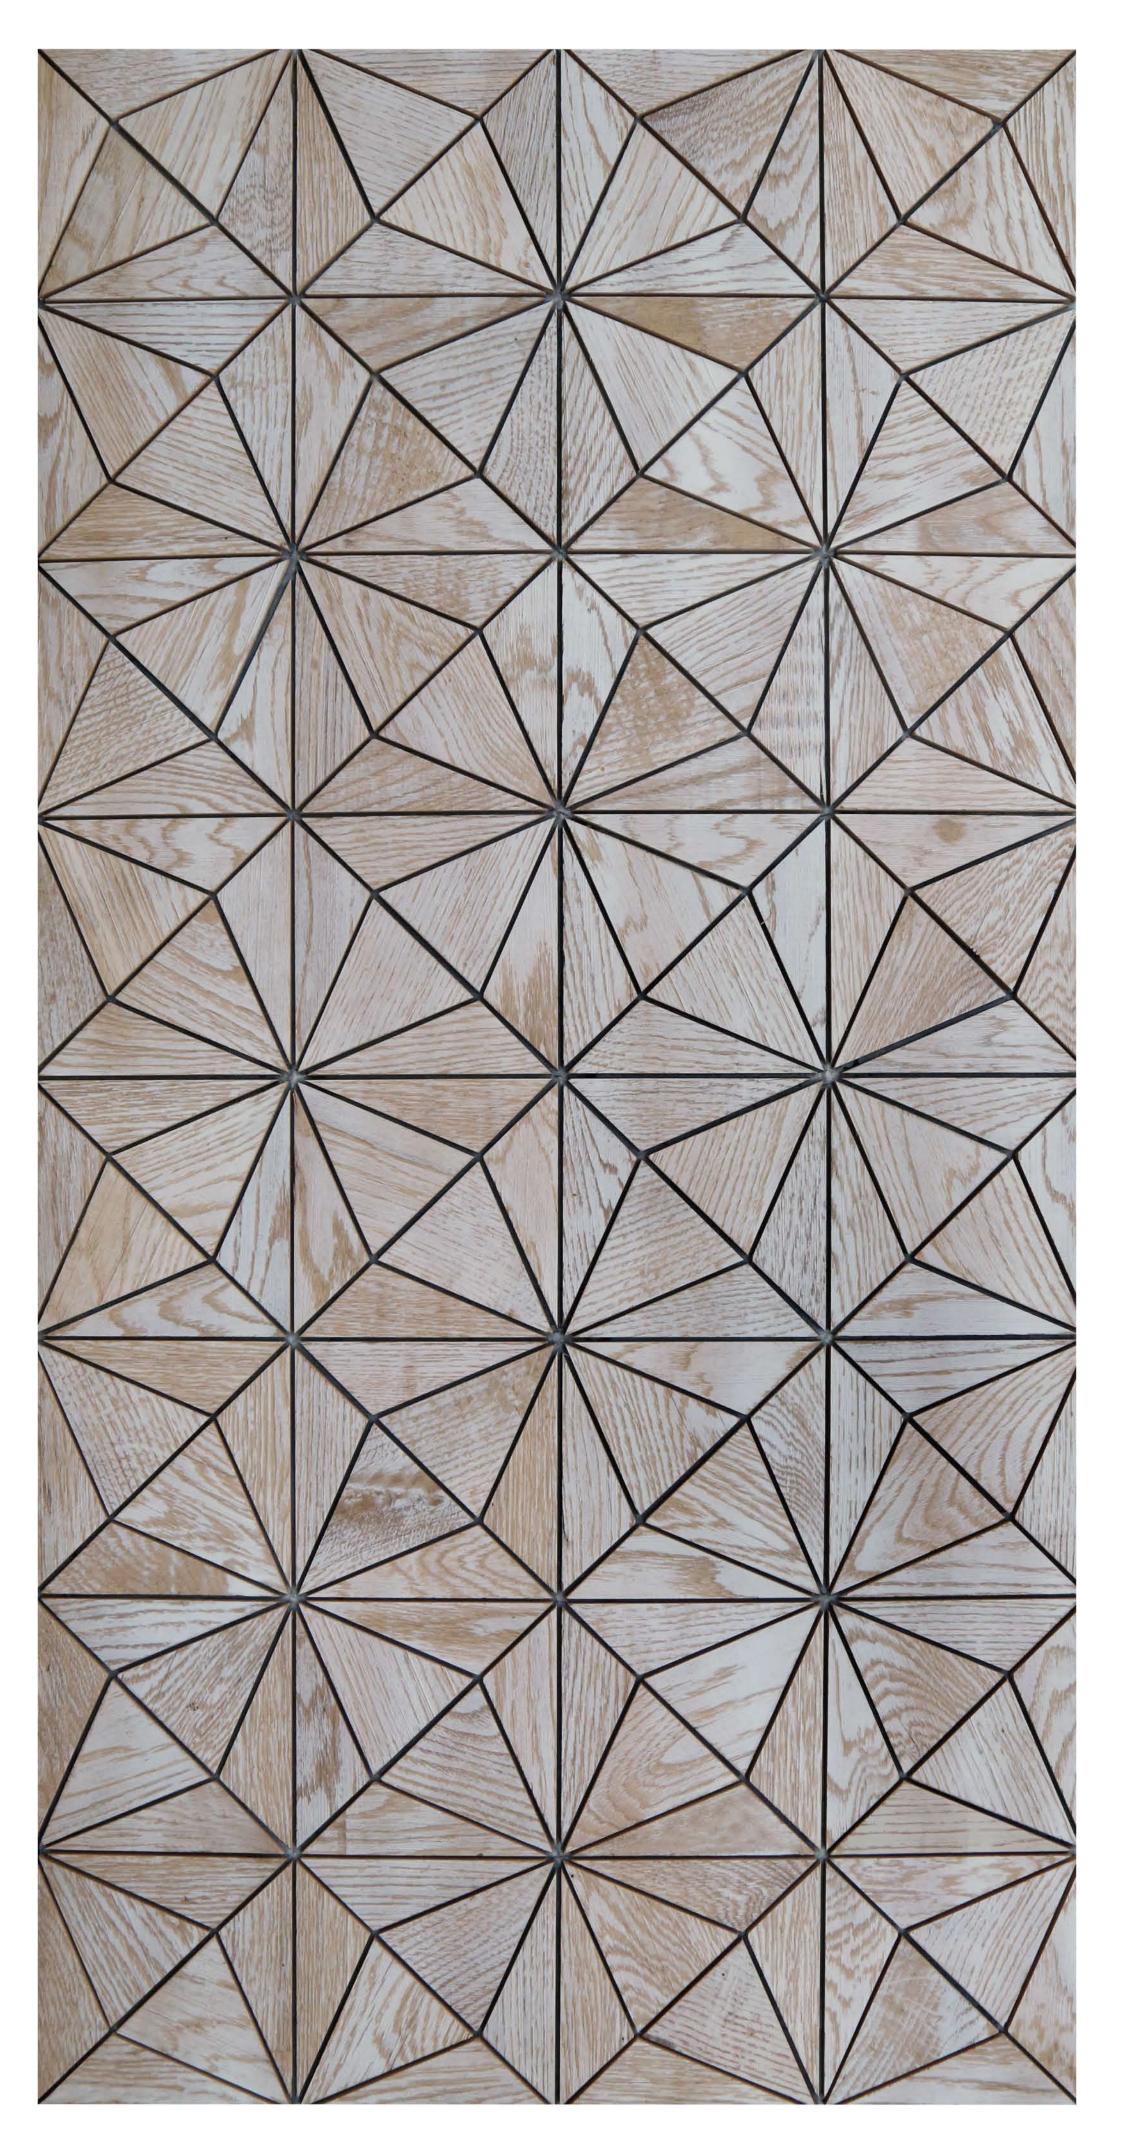

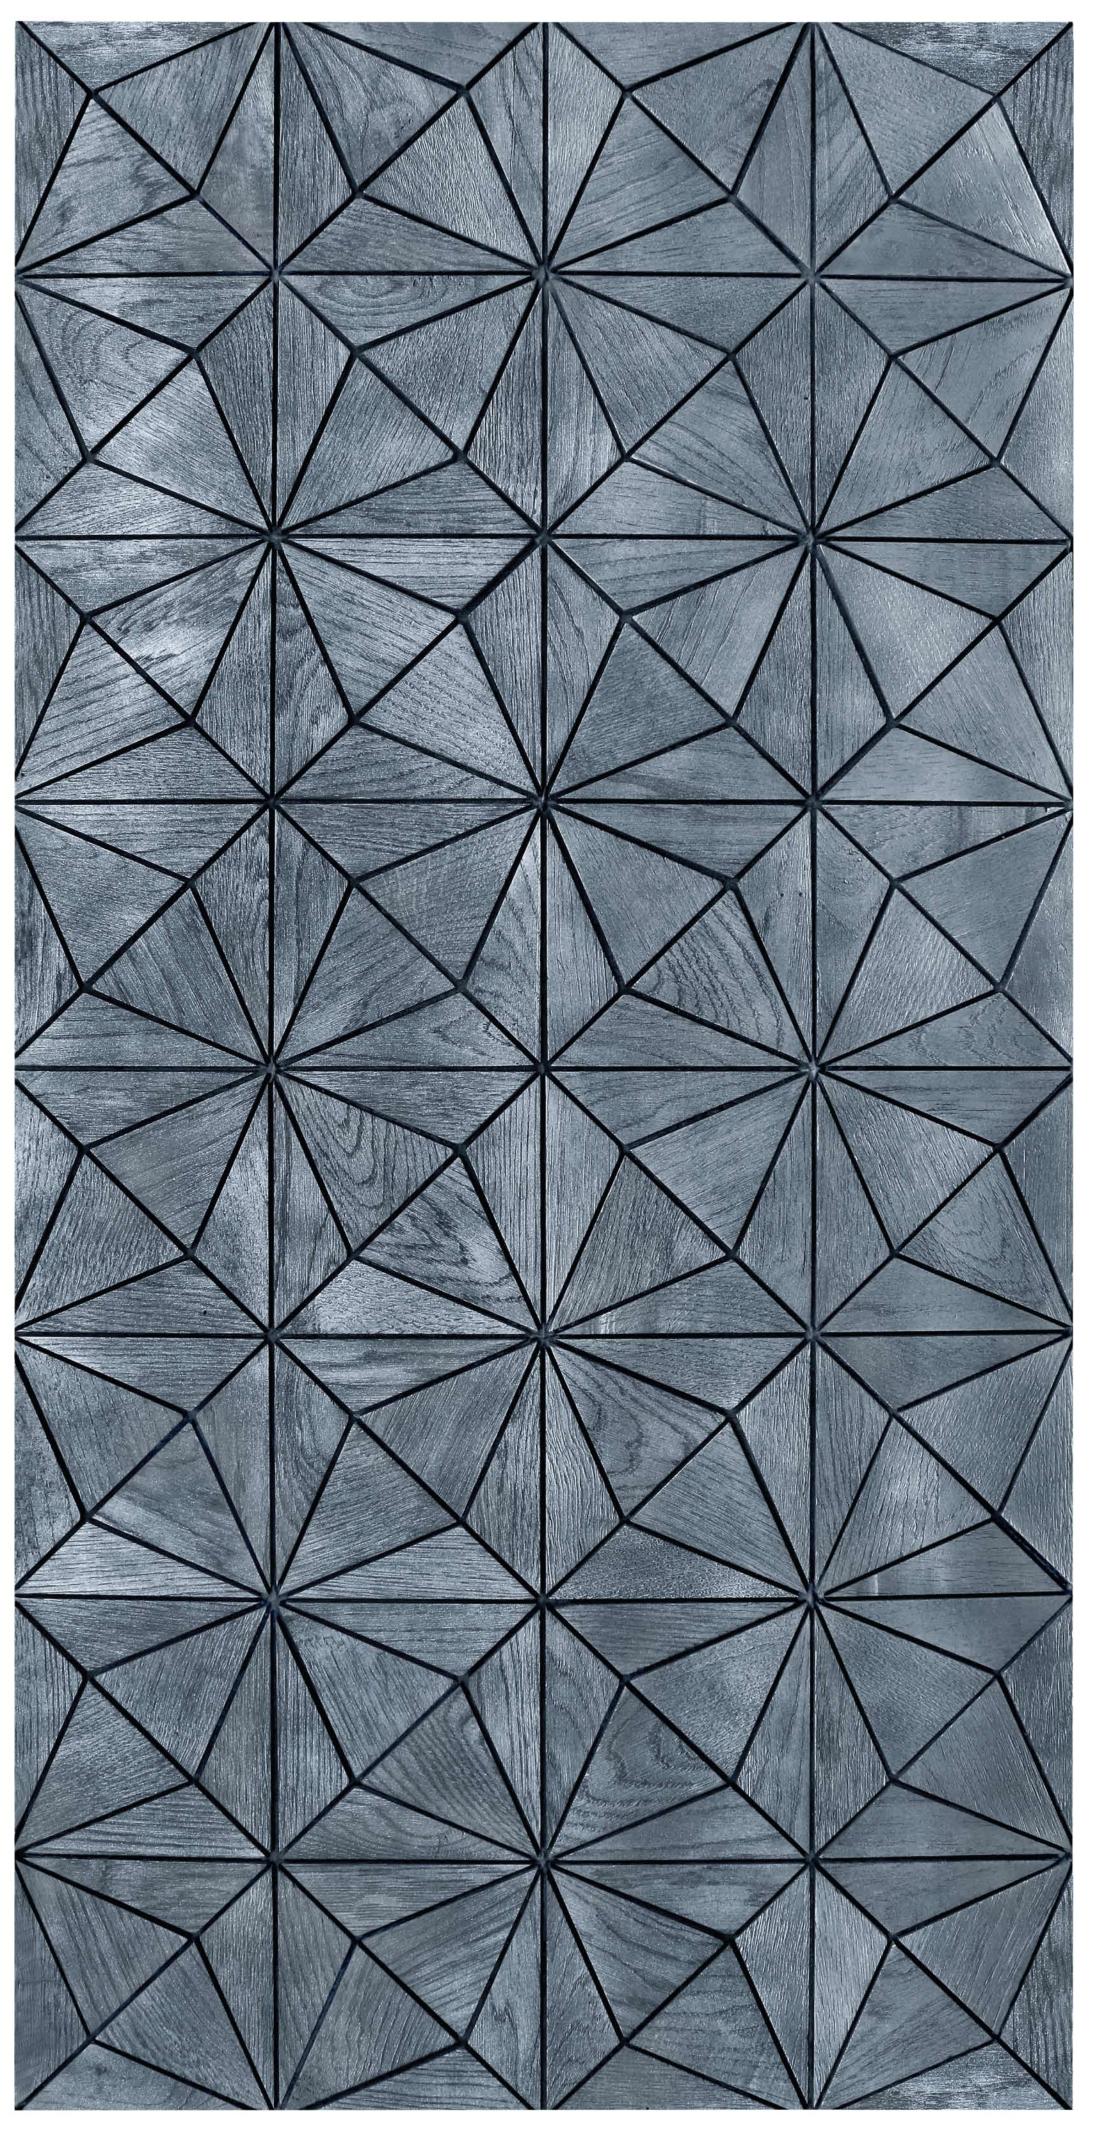

Product Code: NLN-01.7

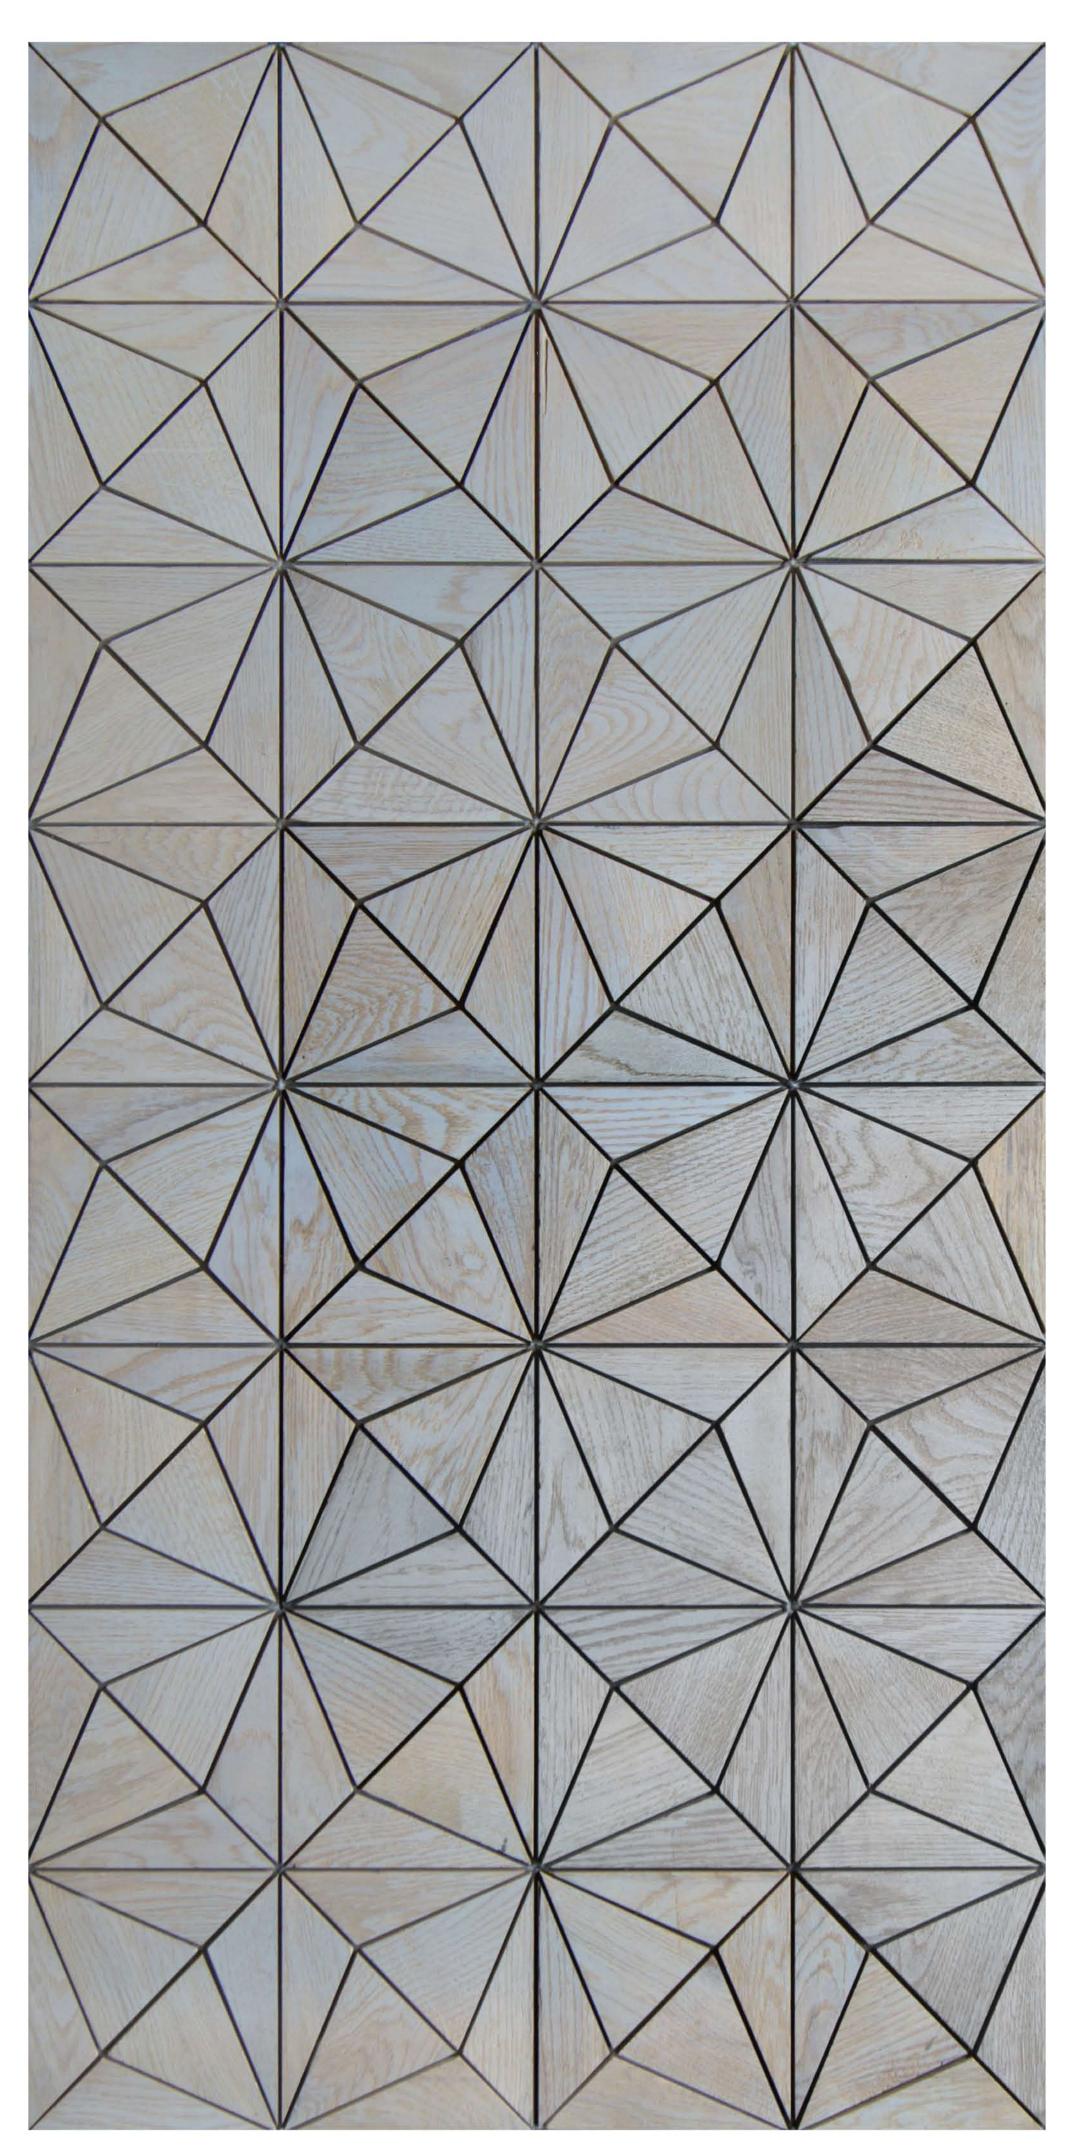

LANTANA

Lantana design concedes a blend of attractiveness and glamour. It advances superior workmanship that is appreciated in modern day and age.



TECHNICAL DETAILS

Wood Pieces Per Panel
Panels Per Box
Weight per Panel
Groove Size (mm)
Out-to-Out Panel Size (mm

Out-to-Out Panel Size (mm)
Out-to-In Panel Size (mm)
Coverage in Square Feet
Thickness of Wood (mm)

Backing
Finish


: 220 : 4 : 2.8 kg


: 2.5 mm : 1223 mm X 657 mm

: 1223 mm X 617 mm

: 8.1 : 6 mm


: Polyester Fabric : Pre - Oiled

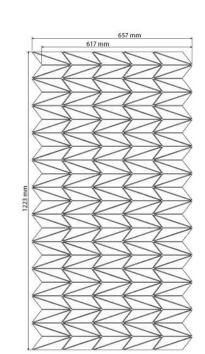






Scan

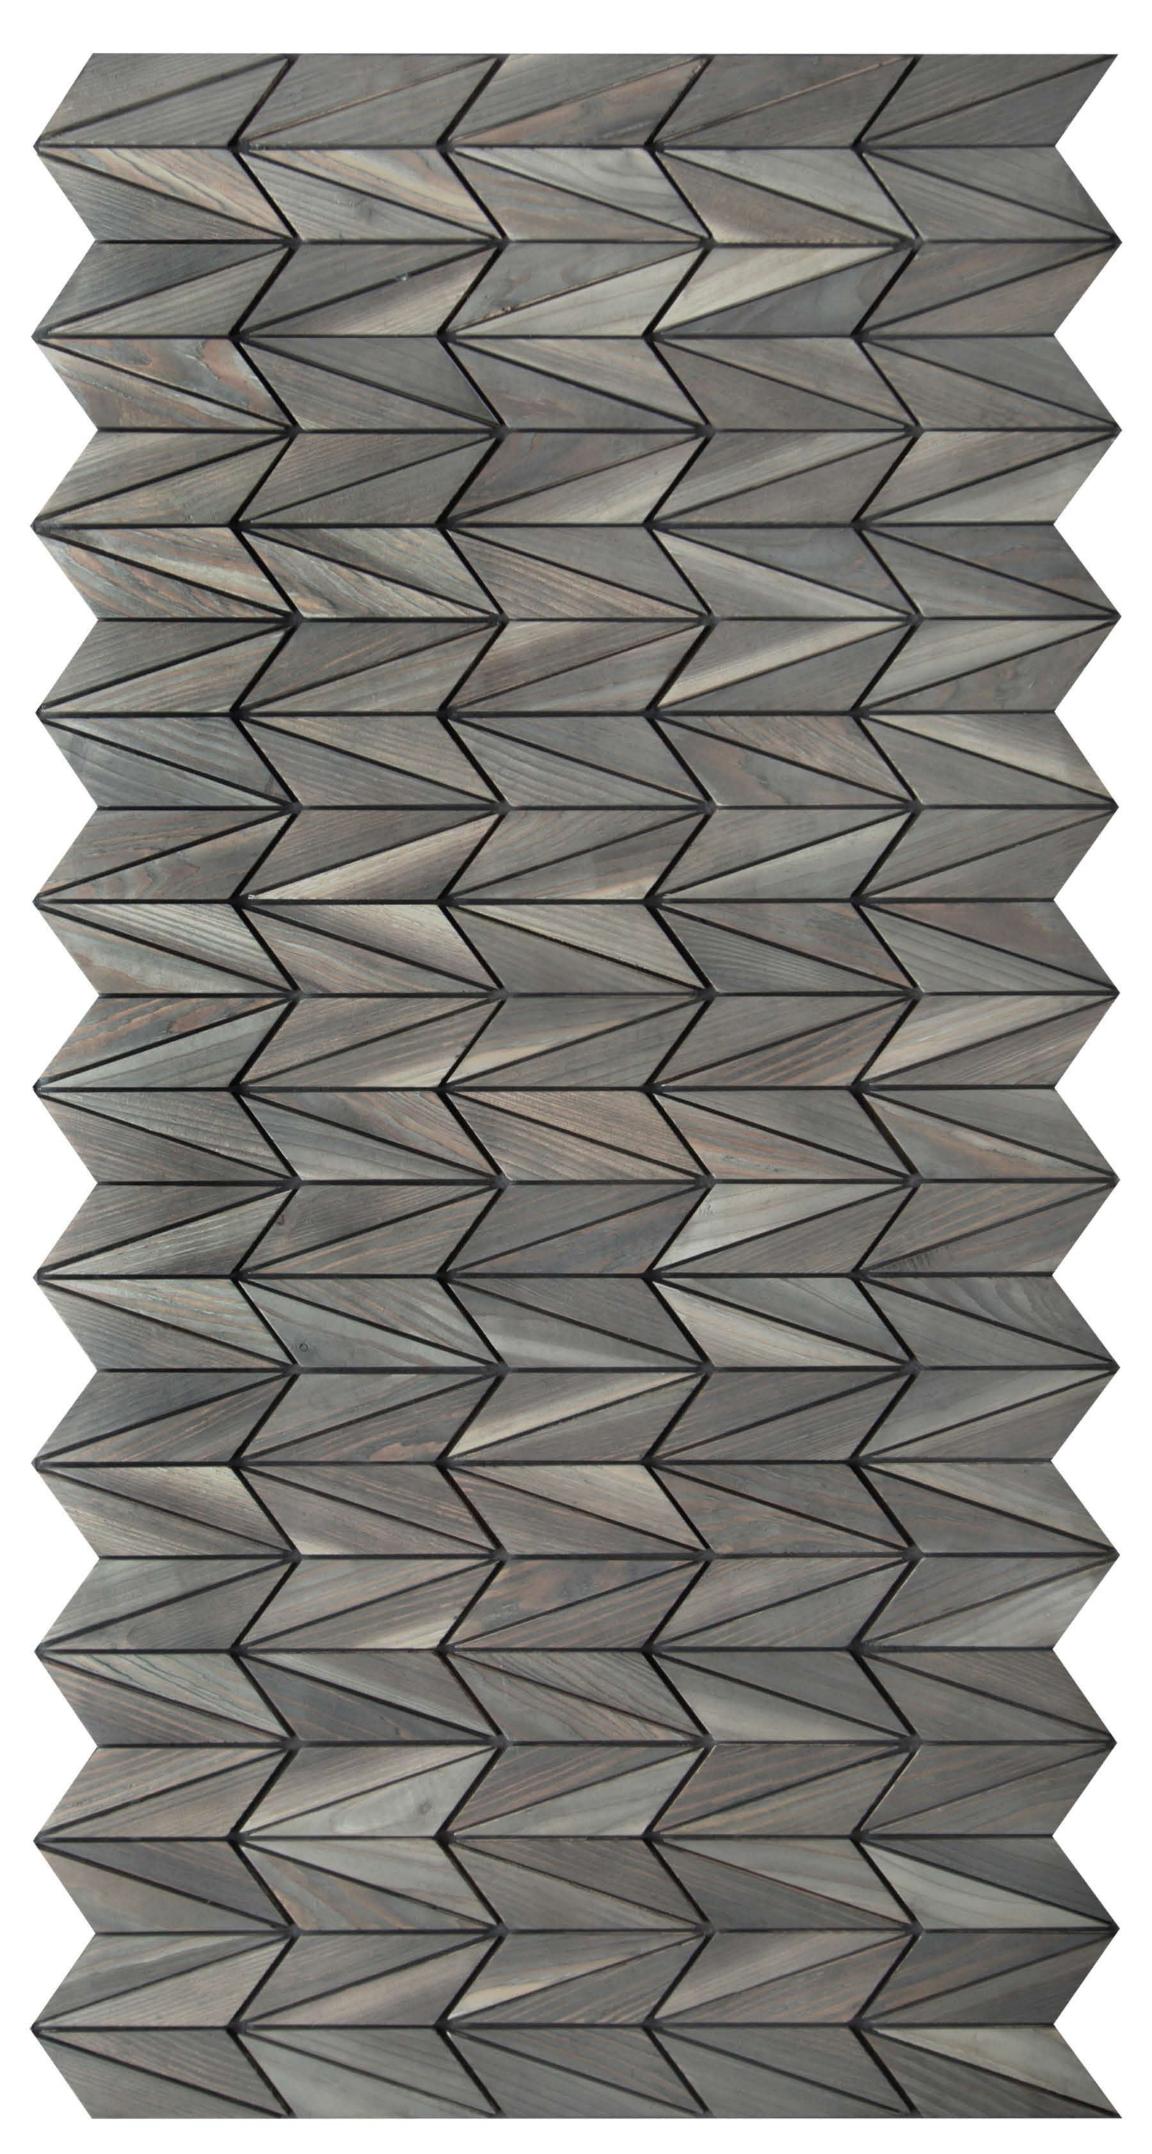

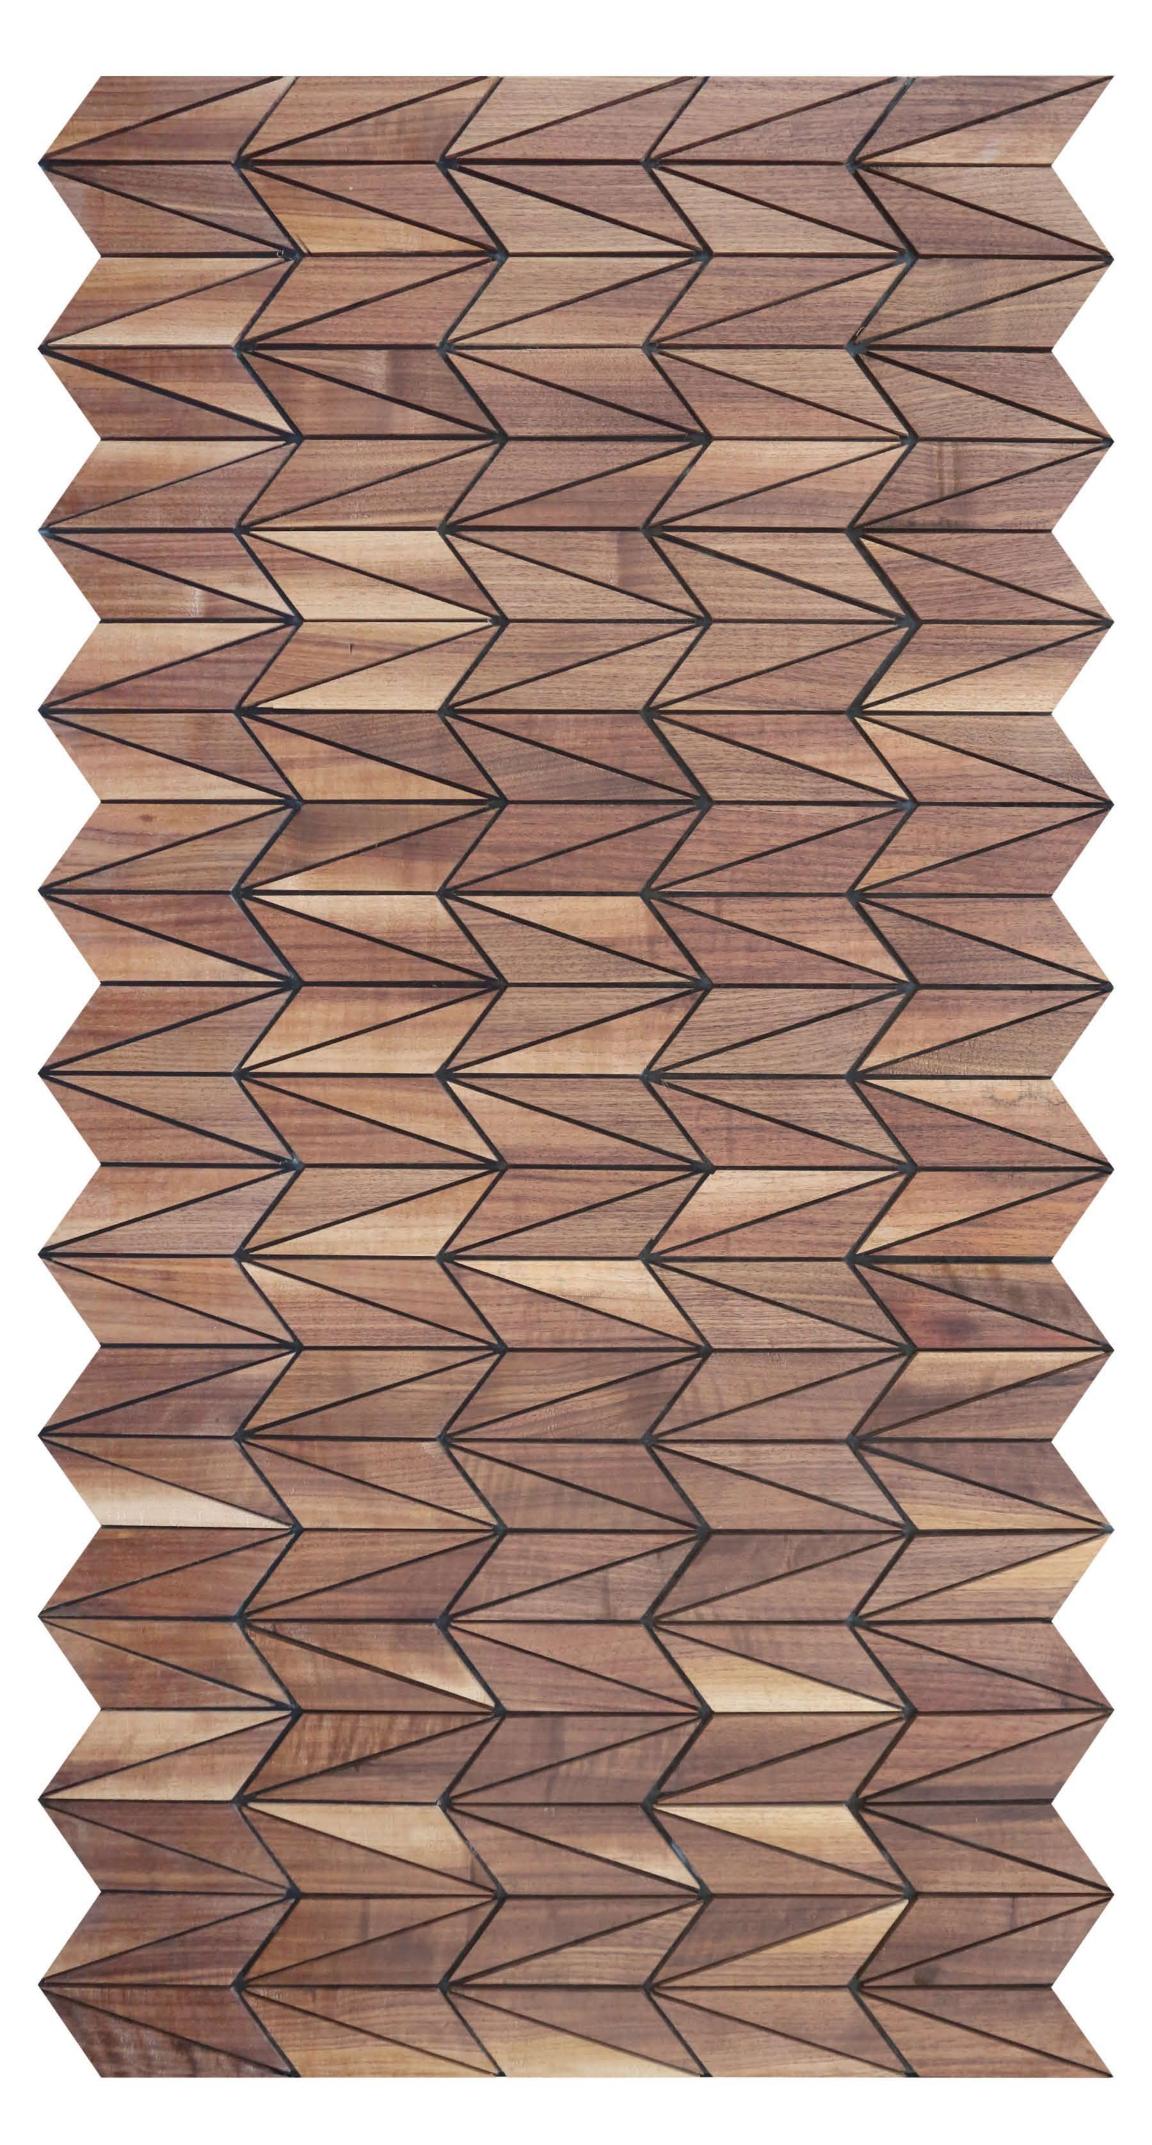



LOBELIA

Lobelia design proposes the wood in an unequivocal fashion. It allows exploration of an illusion that is currently in rage.



TECHNICAL DETAILS

Wood Pieces Per Panel Panels Per Box


Weight per Panel
Groove Size (mm)
Out-to-Out Panel Size (mm)
Out-to-In Panel Size (mm)
Coverage in Square Feet
Thickness of Wood (mm)
Racking


Backing

: 252 : 4 ; 2.6 kg : 2.5 mm : 1264 mm X 661 mm : 1236 mm X 610 mm : 8.1

: 6 mm

: Polyester Fabric : Pre - Oiled

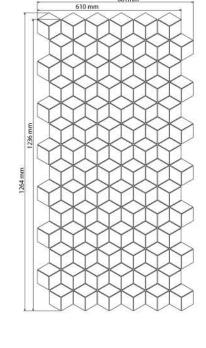








Scan

Finish

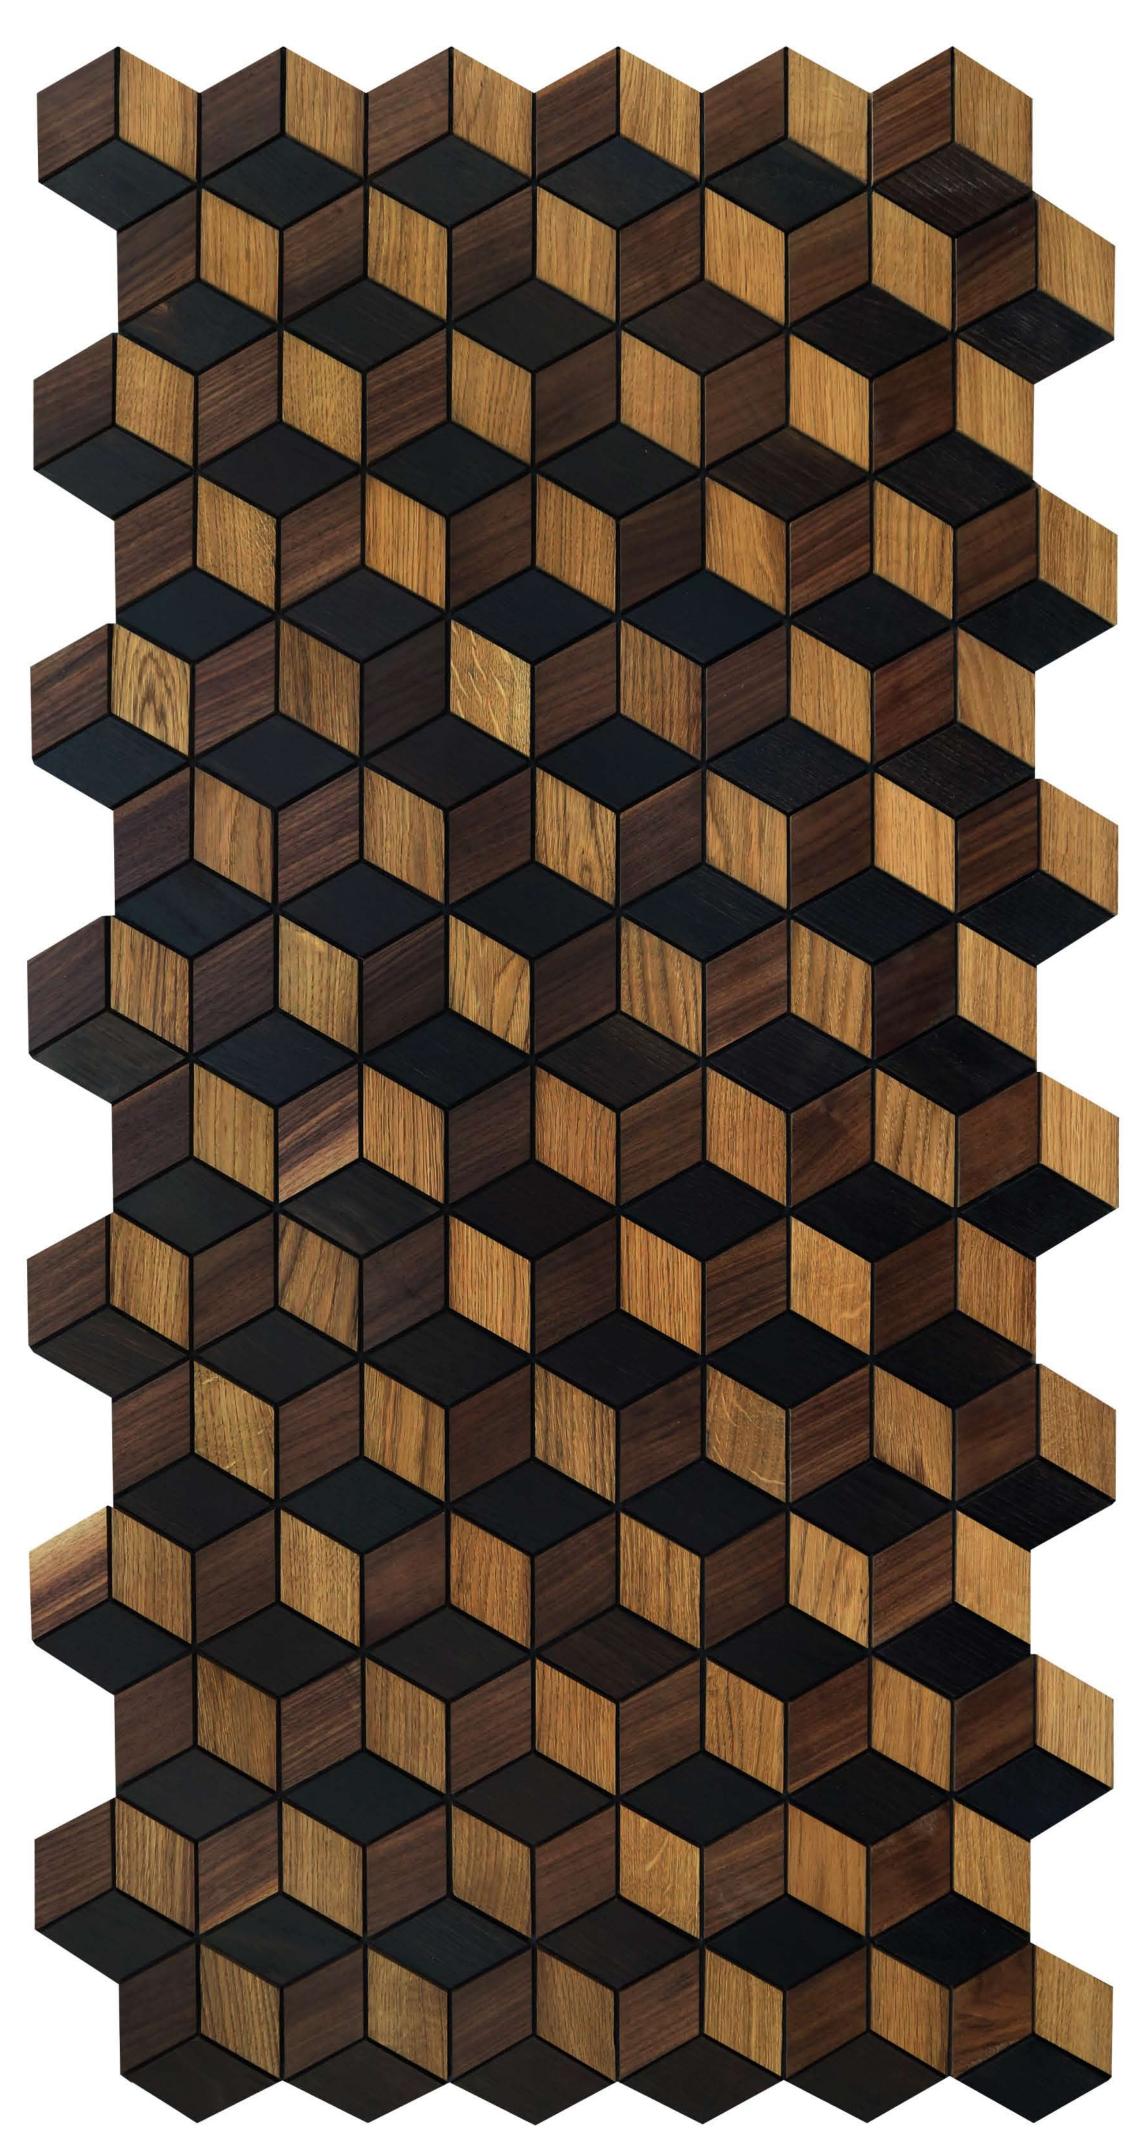

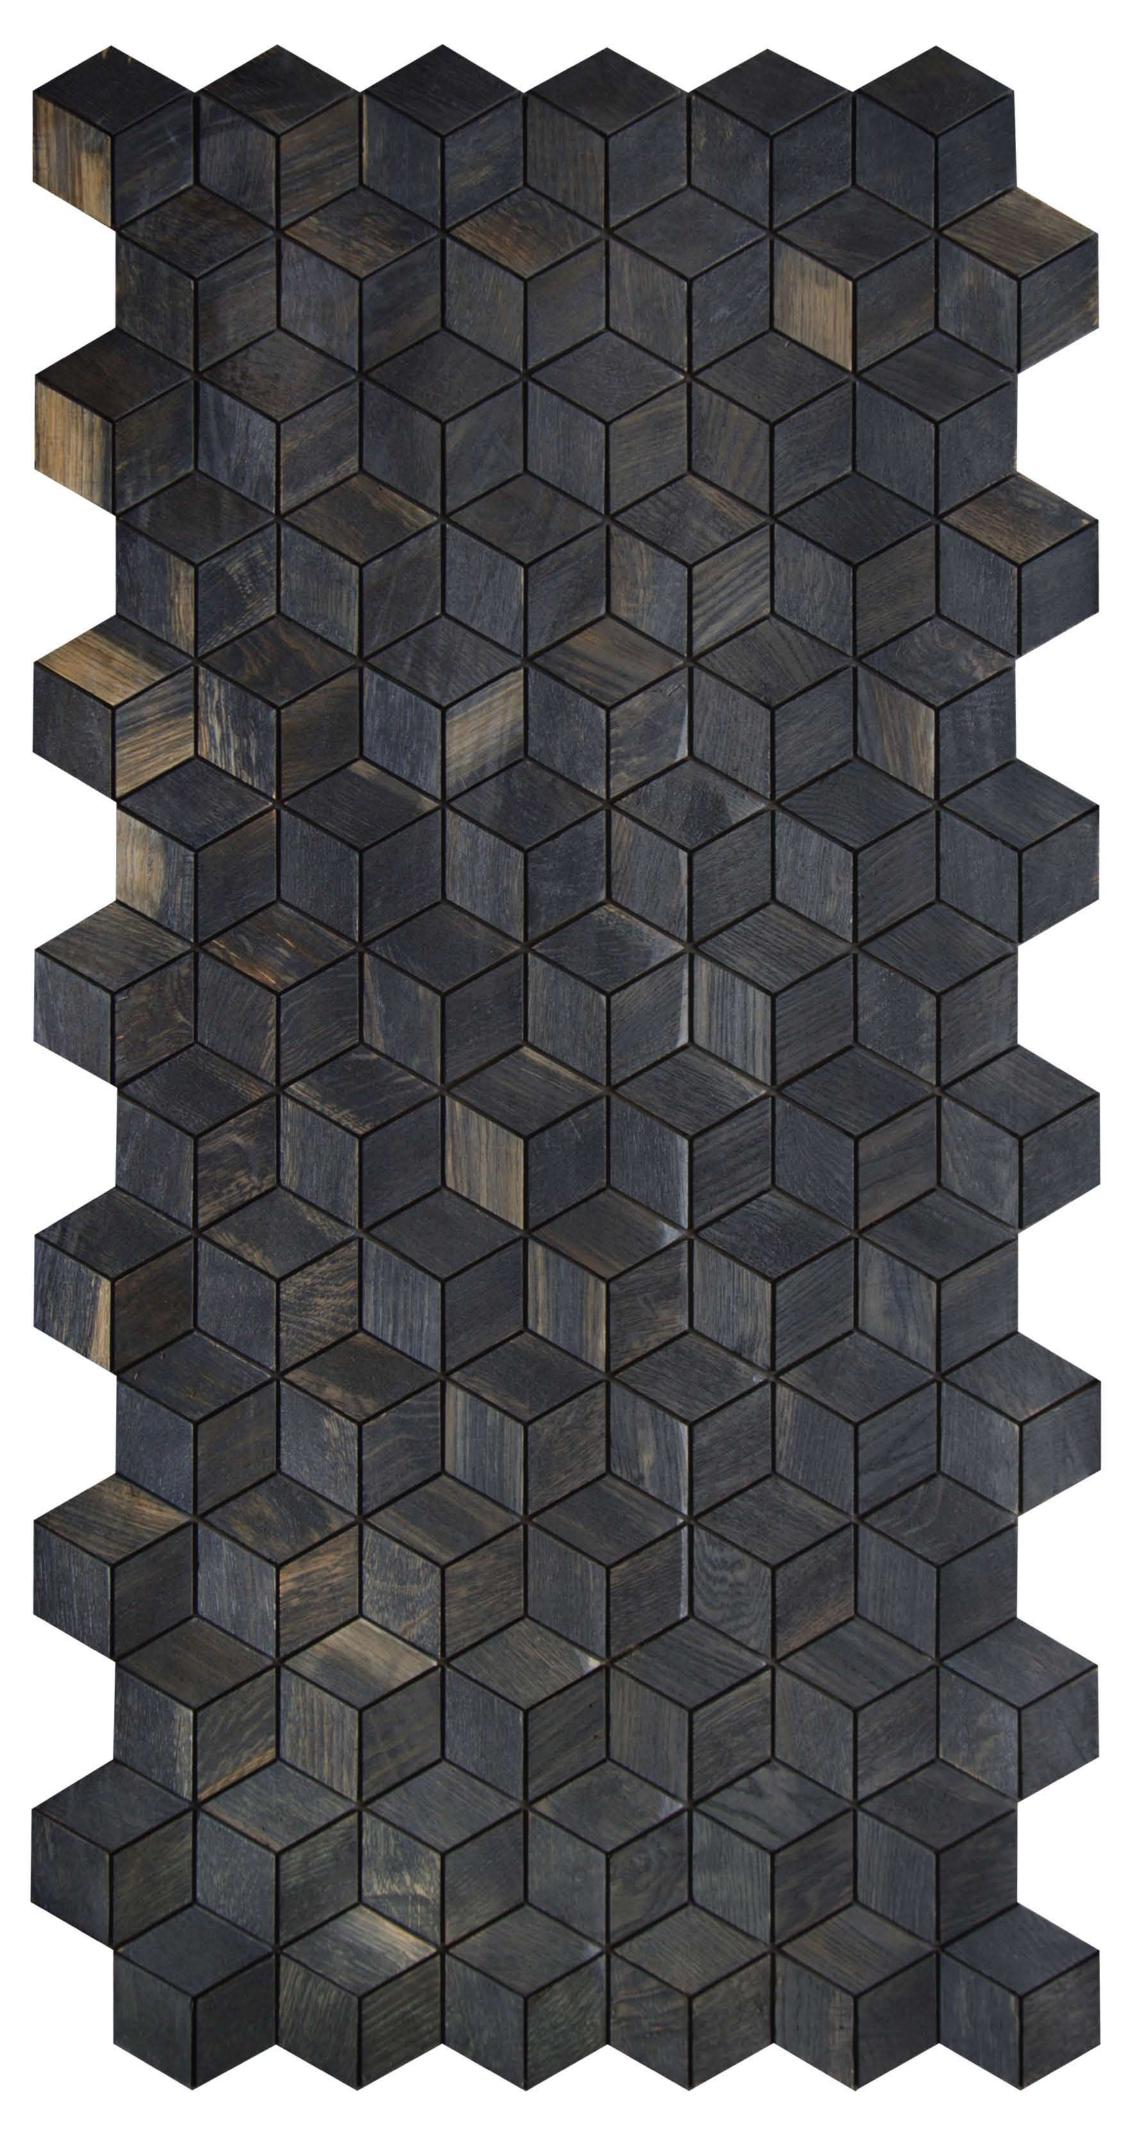

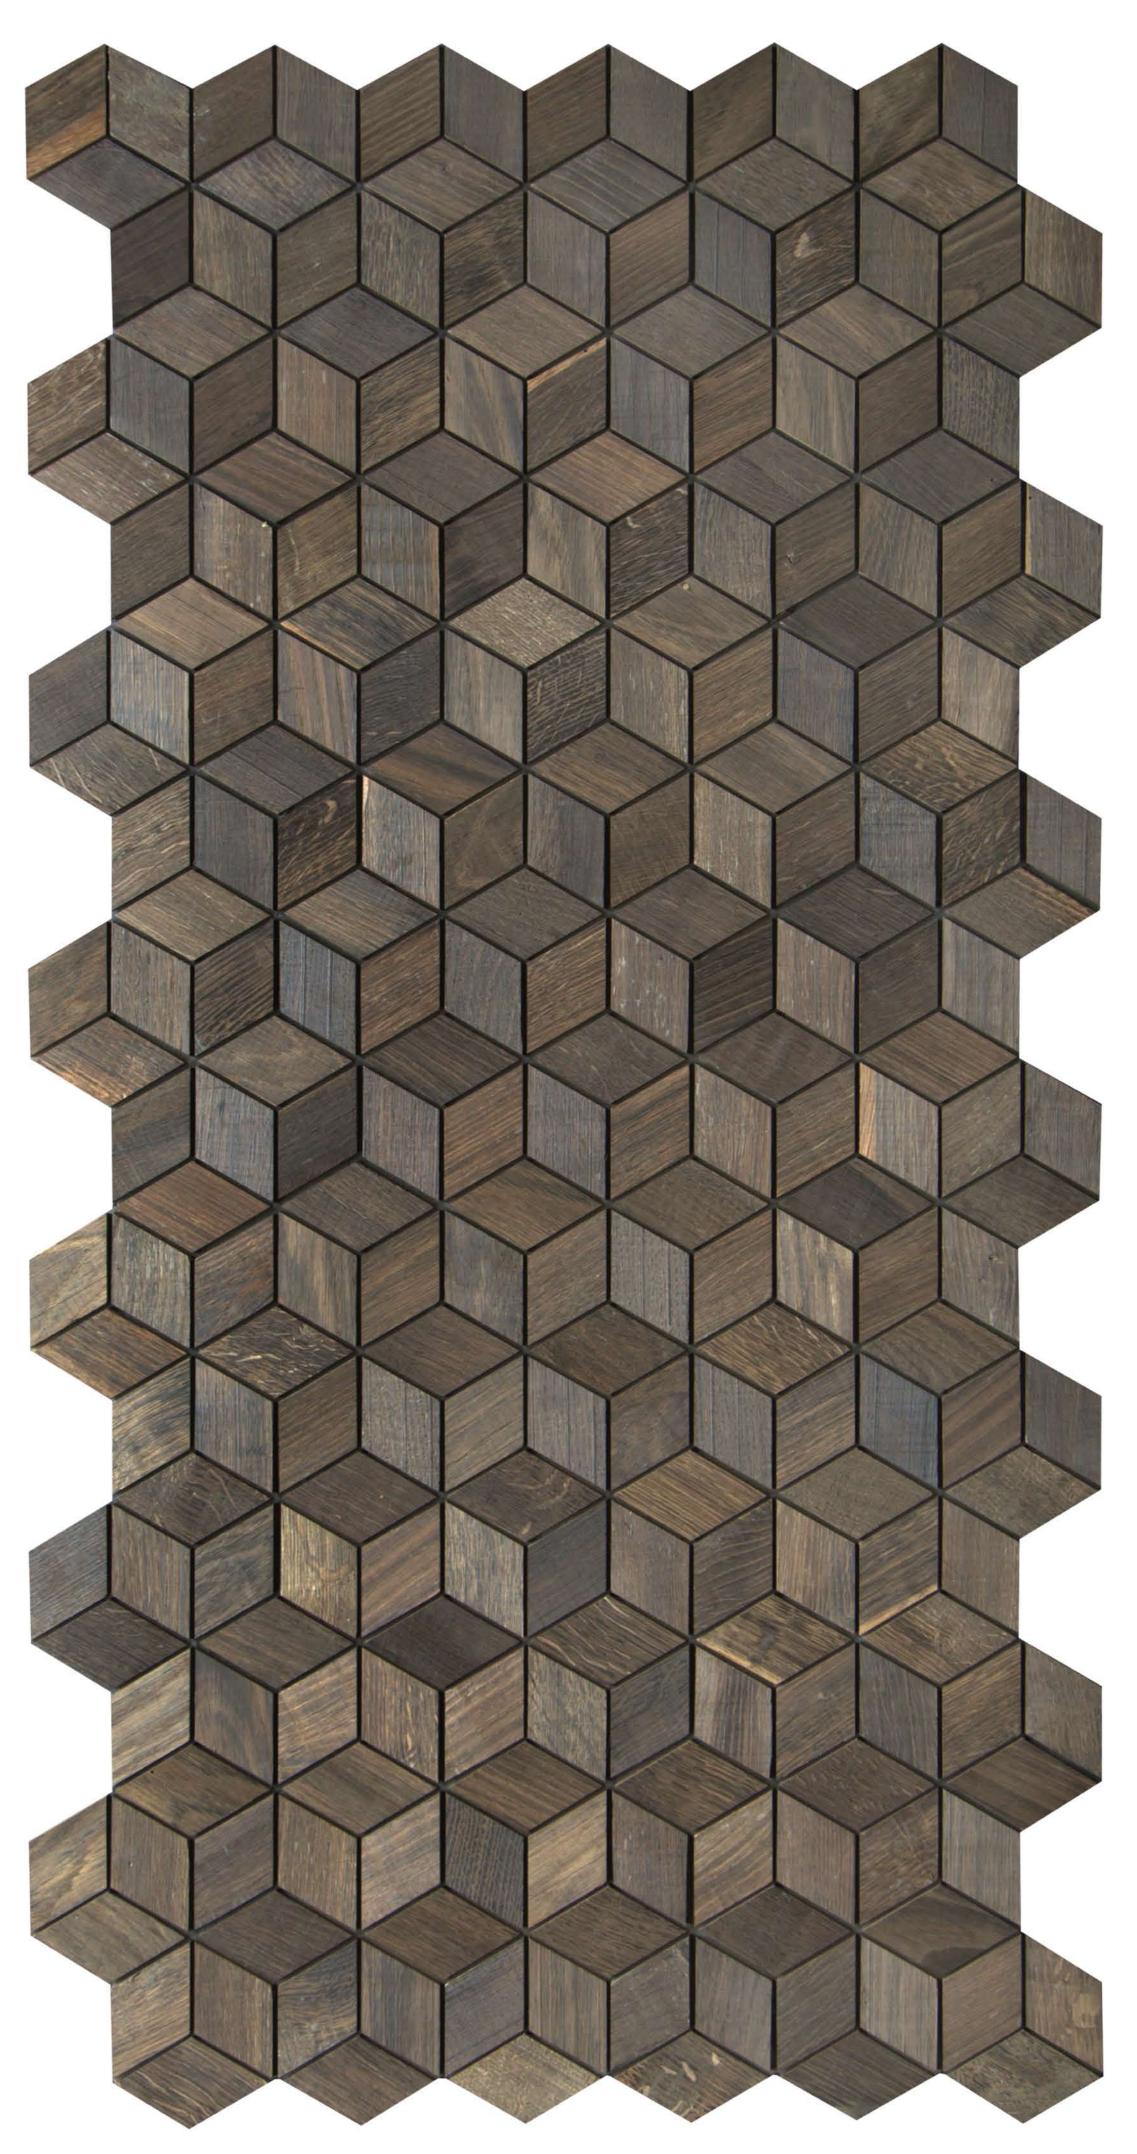

CALADIUM Collection at a glance





How to Apply & Care

How to Apply?

Please follow the application instructions for hassle free installation and future maintenance-

- 1. Provide a completely dry and leveled surface for mounting "TD Walls" Panels.
- 2. If "TD Walls" Panels are mounted directly onto walls (without liner material like plywood), ensure zero water seepage in the wall.
- 3. Applications in wet areas or excessively moist areas are not advisable.
- 4. Any standard glue (substrate to be considered) can be used for mounting "TD Walls" Panels. For standard installations on plywood surfaces standard PVAc white glues are recommended.
- 5. Always insist on using 2.5 mm spacers while laying out individual pieces next to each other.
- 6. Spacers should be used on all four sides to finalize placement before applying pressure mechanism to the surface.
- 7. Always insist on applying uniform pressure on surfaces when liquid white glues are used.
- 8. Maintain uniform pressure on the surface until the glue dries out completely. It is recommended to provide 6-8 hours curing time for the glue.
- 9. Please consider ability to apply uniform pressure in applications on curved surfaces.
- 10. Do not sand heavily for lacquering immediately after application.
- 11. Allow the water based glues to dry out completely before filling the grooves with grouting material.
- 12. Apply one sealer coat of standard wood coating on wood surface before using any grouting material. Spray application is mandatory. Roller application is not advisable.
- 13. Discoloration of wood is possible in case of inappropriate application of sealer coat; before grouting is done.
- 14. Epoxy grouts are highly recommended for its water resistance property.
- 15. Clean the surface thoroughly with a moist cloth after filling grouting material to avoid grout remnants on the surface.
- 16. Apply final top coats for finishing after cleaning the surface thoroughly.
- 17. Standard wood coatings used for veneer/wood surfaces are good for "TD Walls" Panels as well.



Video

Lorem Ipsum is simply dummy text of the printing and typesetting industry.

Care

- 1. Always clean with dry or moist cloth.
- 2. Avoid cleaning with excessively wet cloths.
- 3. Avoid highly acidic cleaning agents.
- 4. Water borne wood cleaning soaps can be used periodically for cleaning.
- 5. Avoid direct water contact or water logging for long duration.

TD Walls Applications



Video

Lorem Ipsum is simply dummy text of the printing and typesetting industry.



Video

Lorem Ipsum is simply dummy text of the printing and typesetting industry.



Video

Lorem Ipsum is simply dummy text of the printing and typesetting industry.



Video

Lorem Ipsum is simply dummy text of the printing and typesetting industry.



Scan me

TURAKHIA DECOR LLP

+91 72039 00235 info@turakhiadecor.com www.turakhiadecor.com

