



New PLANKS  
Series  
2019-20

**STILEX**

**VINYL FLOORING**



**3mm Wood Planks**

6"x36"x3mm

Packing: 24 pcs/36 sqft per box



9302



9013



7087



1622

Note: This card depicts our standard shades which may vary slightly.



**3mm Wood Planks**

6"x36"x3mm

Packing: 24 pcs/36 sqft per box



1103



5305



2550



1644

Note: This card depicts our standard shades which may vary slightly.



### 3mm Wood Planks

6"x36"x3mm

Packing: 24 pcs/36 sqft per box



1129



1493



2510



1633

Note: This card depicts our standard shades which may vary slightly.



**3mm Wood Planks**

6"x36"x3mm

Packing: 24 pcs/36 sqft per box.



3023



1010



2530



2149

Note: This card depicts our standard shades which may vary slightly.



**2mm Wide Wood Planks**

8"x36"x2mm

Packing: 20 pcs/40 sqft per box




7805



7810



6151

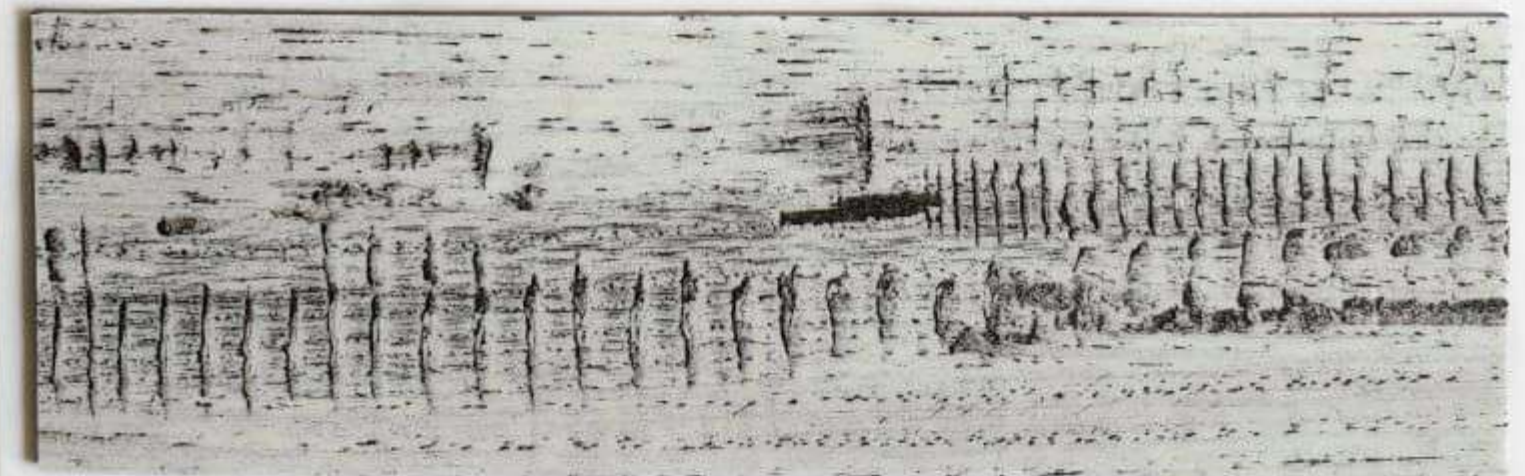

3092

Note: This card depicts our standard shades which may vary slightly.



**2mm Wide Wood Planks**

8"x36"x2mm

Packing: 20 pcs/40 sqft per box



2460



1108



7056



1511

Note: This card depicts our standard shades which may vary slightly.



**2mm Wide Wood Planks**

8"x36"x2mm

Packing: 20 pcs/40 sqft per box



5306



1261



7172



1492

Note: This card depicts our standard shades which may vary slightly.





**2mm Wide Wood Planks**

8"x48"x2mm

Packing: 20 pcs/53.33 sqft per box



1231



1232



1312



1314

Note: This card depicts our standard shades which may vary slightly.



New Tiles  
Series  
2019-20

# STILEX

VINYL FLOORING



**1.5mm Marble Tiles**

18"x18"x1.5mm

Packing: 30 pcs/67.50 sqft per box



6411



5081



5581



8010



6011



3130



7080



3120

Note: This card depicts our standard shades which may vary slightly



**2mm Carpets**

18"x18"x2mm

Packing: 25 pcs/56.25 sqft per box



8100



8155



8883



9506



8630



2515



8606



2514

Note: This card depicts our standard shades which may vary slightly.



**2mm Metal & Sparkle Tile**

18"x18"x2mm

Packing: 25 pcs/56.25 sqft per box



SPK WHITE



SPK BLACK



SPK BLUE



SPK RED



M-217



M - 222



M-221



M - 220

2mm Concrete Tiles & Linear Elegance Tiles

24"x24"x2mm

Packing: 15 pcs / 60 sqft per box




C-1



C-3



C-2

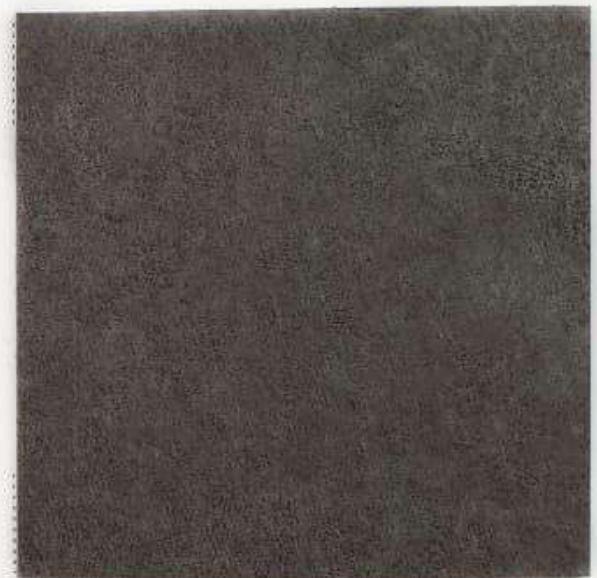

C-4



L-1



















L-2

## DESCRIPTION

STILEX vinyl floorings are available in a variety of design, thickness and textures for different applications for both residential and commercial use. These flooring tiles, Strips and planks are non-asbestos flexible vinyl floorings brought to you with a combination of elegance, warmth, charm and richness of natural products like wood and marble. The wood planks and carpet tiles are available with an exceptional heavy duty wear layer of 0.3mm which gives the product an excellent abrasion resistance. Stilex tiles and planks also have a matt finish UV coating to protect colour fading and also provide a dust repellent surface for easy maintenance.

## TECHNICAL DATA

CHARACTERISTICS	TEST METHOD	RESULT
 Dimension	EN 427	2.0mm Plank 6" x36" (15.24x91.44cm) 3.0mm Plank 6" x36" (120.32x91.44cm)
 Thickness-Overall		2.0 / 3.0 mm
 Total weight	EN 430	14 / 19 Kgs/Box
 Peeling strength of layers	EN 431	Pass
 Shear forces of layers	EN 432	Good
 Residual indentation after static load	EN 433	≤0.10mm
 Dimension stability	EN 434	Shrinkage ≤ 0.25% Curling ≤ 2mm
 Flexibility-10 mm mandrel	EN 435	No Damage
 Wear resistance	EN 660 ASTM F 510	≤2.0mm <sup>3</sup> <2.0mm <sup>3</sup>
 Toxic	EN 71 part 3	Complies
 Color fastness to light	EN 20 105-B02	≥ 6
 Resistance to fire	ASTM E84 - 03	NFPA Class B
 Slip resistance	DIN 51130	R9
 Bearing a castor chair	EN 425	Suitable
 Resistance to chemicals	EN 660 ASTM F 510	Class 0
 Performance classification	EN 685	22, 34, 43

Imported by:

**Raj Agencies**

Mumbai-21

E-mail: [stilexfloors@gmail.com](mailto:stilexfloors@gmail.com)

<http://www.stilex.in>

# STILEX

VINYL FLOORING

WOOD STRIPS

WOOD PLANKS

MARBLE TILES

SPARKLE TILES

CARPET TILES

PARQUET PLANKS

For Lower Traffic Areas  
LATEST COLLECTION RANGE  
2019-2020

Step in Style Step on **STILEX**



## 1.2mm Vinyl Planks

Size: 6"x36" Packing: 40pcs/60sqft per box.



126



127



128



129



131

## 1.2mm Vinyl Planks

Size: 6"x36" Packing: 40pcs/60sqft per box.



121



122



123



124



130

## 1.5mm Vinyl Planks

Size:6"x36" Packing:30pcs/45sqft per box.



6000



8008



8105



8174



3302



2976

## 1.5mm Vinyl Planks

Size:6"x36" Packing:30pcs/45sqft per box.



2705



3901



2704



2711



1779



6601

# 1.5mm Vinyl Planks

Size:6"x36" Packing:30pcs/45sqft per box.



1001A



1001C



2023



1776



6003



2978

## 2.0mm Vinyl Planks

Size:6"x36" Packing:24pcs/36sqft per box.



5267



3664



5188



3364

## 2.0mm Vinyl Planks

Size:6"x36" Packing:24pcs/36sqft per box.



1477



5189



2030



2186

## 2.0mm Vinyl Planks

Size:6"x36" Packing:24pcs/36sqft per box.



3508



3505



2977



2979



# STILEX

VINYL FLOORING

## Description :

STILEX vinyl floorings are available in a variety of design, thickness and textures for different applications for both residential and commercial use. These flooring tiles, strips and planks are non asbestos flexible vinyl floorings brought to you with a combination of elegance, warmth, charm and richness of natural products like wood and marble. The wood planks and carpet tiles are available with an exceptional heavy duty wear layer of 0.3 mm which gives the product an excellent abrasion resistance. Stilex tiles and planks also have a matt finish UV coating to protect colour fading and also provide a dust repellent surface for easy maintenance.

## Application :

STILEX products are ideally suited for installation in any residential, commercial and public area such as offices, restaurants, shopping areas, schools, lifts, etc where a low maintenance, rich looking flooring solution is required. It is strongly recommended that 1.2/1.5/2.0 mm products are not used in high commercial areas where very heavy traffic load is expected.

## Installation :

STILEX vinyl products are ideal for laying on any smooth, dry, hard and even surface including timber and concrete. However, care must be taken to ensure that the sub floor is completely free from any moisture, oil, grease, dirt, etc.

Suitable quality adhesive such as Fevicol 998 / 505 / Dunlop S 758 or equivalent should be used. Water based adhesives such as VC 31 can also be used. Sufficient drying time must be given before walking on the newly installed floor.

The job of installation must only be carried out by a trained and experienced floor contractor.

## Maintenance :

It is important to place an entrance mat to trap outside dust from entering. Any food spills must be immediately cleaned up with a non abrasive general cleaner. Regular cleaning is advised with a dry vacuum cleaner or mopping. When mopping the floor with water, care must be taken to ensure that water does not seep in through the joints. Since these flooring products are already coated with a UV protective layer dust retention will be at the minimal. Waxing is not required. Always ensure that all furniture legs are fitted with floor protectors.

Imported by :

**Raj Agencies**

[stilexfloors@gmail.com](mailto:stilexfloors@gmail.com)

[www.stilex.in](http://www.stilex.in)

**NOT: This card depicts our standard shades which may vary slightly from batch to batch.**

# STILEX SPORTS


TECHNICAL DATA	STANDARD	FLEX 4500	FLEX 6000	FLEX 8000
<b>PRODUCT DESCRIPTION</b>				
Total thickness	EN 428	4.5mm	6.0mm	8.0mm
Roll width	EN 426	1.5m / 1.8m	1.5m / 1.8m	1.5m / 1.8m
Roll length	EN 426	20.0m	20.0m	20.0m
Weight	EN 430	3.2kg/m <sup>2</sup>	4.5kg/m <sup>2</sup>	5.6kg/m <sup>2</sup>
<b>PRODUCT DESCRIPTION</b>				
Shock absorption	EN 14808	21%	31%	36%
Sliding coefficient	DIN 18032	0.4 - 0.6	0.4 - 0.6	0.4 - 0.6
Energy return	NF P 90 203	≥0.31	≥0.31	≥0.31
Ball bounce	EN 12235	≥90%	≥90%	≥90%
Vertical deformation	EN 14809	≤3.5mm	≤3.5mm	≤3.5mm
<b>PRODUCT DESCRIPTION</b>				
Abrasion resistance	EN ISO 5470-1	≤350mg	≤350mg	≤350mg
Impact resistance	EN 1517	≥8	≥8	≥8
Indentation Resistance	EN 433	≤0.5mm	≤0.5mm	≤0.5mm
Fire resistance	EN 13501-1	Cr-s1	Cr-s1	Cr-s1
Light resistance	EN 20 105-B02	>6	>6	>6
Chemical resistance	EN 423	excellent	excellent	excellent
Dimensional stability	EN 434	<0.1%	<0.1%	<0.1%
Anti-bacterial	—	yes	yes	yes
Sound isolation	EN ISO 717/2	21dB	22dB	24dB



IMPORTED BY : RAJ AGENCIES, MUMBAI  
[www.stilex.in](http://www.stilex.in)



STILEX SPORTS

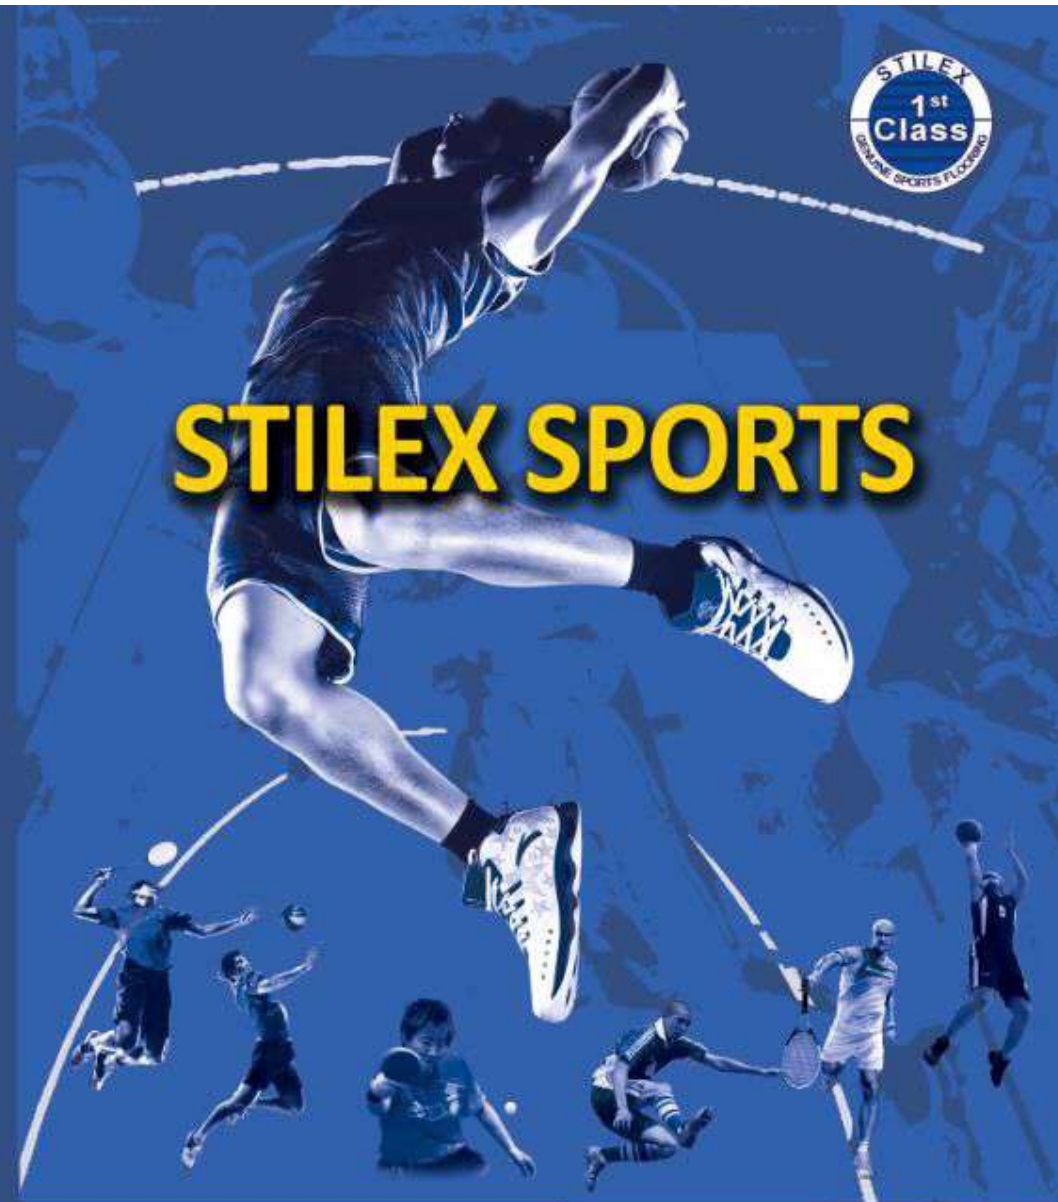

# STILEX SPORTS

# STILEX

# STILEX SPORTS

SOLID COLOR



Mint Green 6602



Orange 6901



Red 6180



Blue 6401



Yellow 6205



Sky Blue 6403




Grey 6303

STILEX SPORTS is available in both wood and solid colors.  
This is a production sample, which may vary slightly in shade from the batch supplied.

# STILEX SPORTS

WOOD

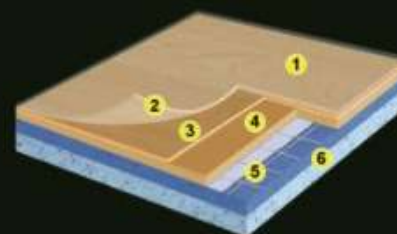

- 1 PUR coating
- 2 Durable wear layer
- 3 Printing layer
- 4 Compact layer
- 5 Reinforced fiberglass layers
- 6 Closed cell foam backing



Maple Wood 6381



Oak Wood 6357



Dark Wood 6305