

CHARACTERISTICS



Low-maintenance and hard-wearing.



Flame resistant.




Largely resistant to cigarette burns.



Non-fading and retain their brilliance over many years.



Rugged, load and impact-resistant.

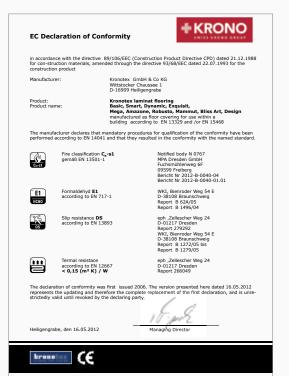



Abrasion-resistant.



Produced from natural sustainable raw materials.



Comfortable underfoot.



Well suited for installation over subfloor heating.



Stain-resistant.



► HOW DURABLE IS YOUR LAMINATE FLOORING?

An important step in choosing a laminate floor is determining the level of durability you require. Industry certified AC Ratings help you decide if a laminate floor has the right durability for your particular project. You'll find the AC rating for each product shown on the Product Detail page.

HERE ARE THE LEVELS OF AC RATINGS:

- AC3 laminate flooring is designed for high-traffic residential areas and may also be used in commercial areas with light traffic
- AC4 laminate flooring is designed for commercial applications with moderately intense traffic. Ideal for small shops and offices.
- AC5 laminate flooring is designed for high-traffic commercial areas like department stores, shopping centers, and office buildings.

Laminate flooring is both practical and beautiful. Color, texture and overall appearance are the main attributes most people look for when choosing new laminate flooring for their home. But, knowing the AC Rating of your selection will give you the added confidence that you are making the right choice for your purpose and for your pocketbook.

PANEL CONSTRUCTION



- A:The top surface of the fooring consists of a specially resistant protective overlay film. This is fused with an attractive resinated decorative film into a practically abrasion-proof, hardwearing surface.
- **B**:Extremely dense HDF fiberboard forms the supportive core (HDF, E1).
- C:On the undersurface of the core a dampness impeding stabilization film ensures and preserves the high structural stability.
- D:Selected foorings are fitted with an additional SOUND DESIGN underlay to minimise footstep and ambient noise.



► MAMMUT PLUS COLLECTION

MAMMUT PLUS - Extra-Wide Laminate Flooring

The best and more. This is the promise of the new decors of the MAMMUT PLUS collection from KRONOTEX. While exhibiting the same technical mastery as all MAMMUT flooring, this new line offers you even more authenticity, an even larger choice of styles and even greater perfection. Apart from its incredible robustness and versatility, MAMMUT PLUS also raises the bar in other ways. Its extra-wide panels complement the existing extra-long and extra-sturdy versions of the MAMMUT family. And the decors seduce you with their elegantly authentic natural wood look, which can't help but add posh country-style comfort to your home.

FEATURES

- AC5 Grade material
- Dimension 1845 x 244 x 10mm
- These panels are especially long.
- These panels are especially wide.
- These panels have a special surface structure.
- A 5G snap-together system makes the flooring even easier to install.
- These panels feature a 45° sloped edge. When they are joined together, a V-groove forms, producing a natural solid wood character. V4 - all the way round
- The floors are Antistatic
- Mammut plus flooring is covered by a warranty lasting 30 years (for residential use) or 5 years (for commercial use)

► TEST	► CHARACTERISTICS	► TEST METHOD
Formaldehyde emission	< 0.05 ppm	EN 717-1
Surface stain resistance	Grade 5, no visible changes to surface	EN 438-2, 15
Lightfastness	≥ Level 6 Blue Wool Scale	EN ISO 105-B02
	≥ Level 4 Grey Scale	EN 20 105-A02
Resistance to cigarette embers	Grade 4, no visible changes to surface	EN 438-2, 18
Fire resistance	Ignites with difficulty, at least Cfl-s1	EN 13501-1
Height difference between connected elements	Average: ≤ 0.10 mm	EN 13329
	max: ≤ 0.15 mm	
Edge straightness (bend)	≤ 0.3 mm/m	EN 13329
Openings between connected elements	Average: ≤ 0.15 mm	EN 13329
	max: ≤ 0.20 mm	
Static indentation	< 0.01 mm - no visible changes, Impression in test	EN 433
	with straight steel cylinder of 11,3 mm diameter	
Strength	Thermal conductivity (W / (m × K)	Overalheat transfer
		coefficient Thermal
		resistance((m ² ×K)/W)
12	0.14	0.09














THE MAMMUT PLUS COLLECTION



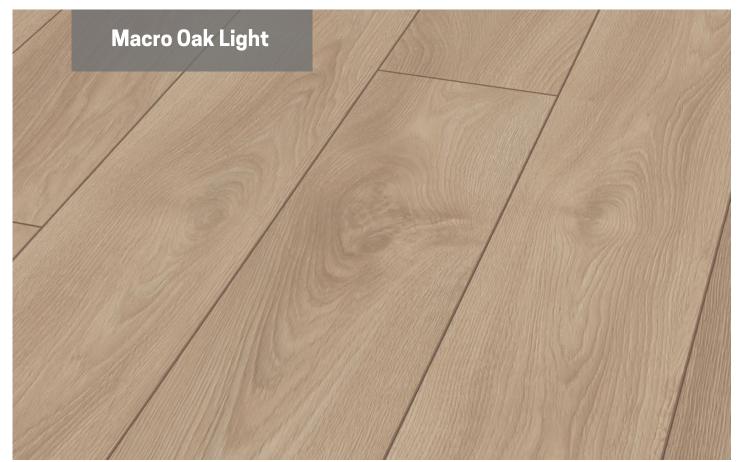

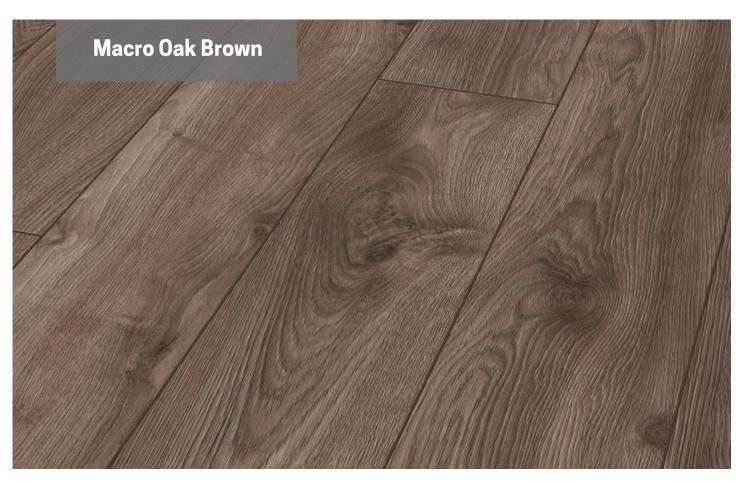



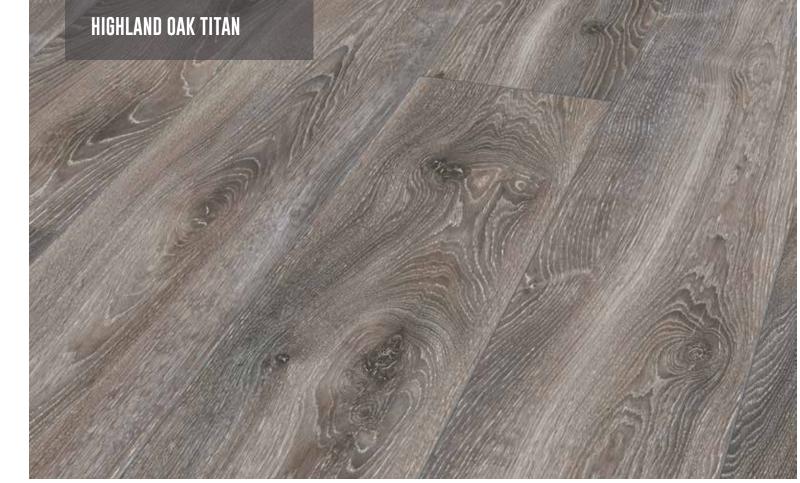






LAMINATE PROFILE

Laminate Profile match our flooring in quality and shade. These profiles come in various shapes and cover all kinds of corners. Laminate profiles ensure that the warranty on Kronotex flooring remains intact as long as it's valid. Laminate profiles are made with high grade fiber board which makes it durable and long lasting.

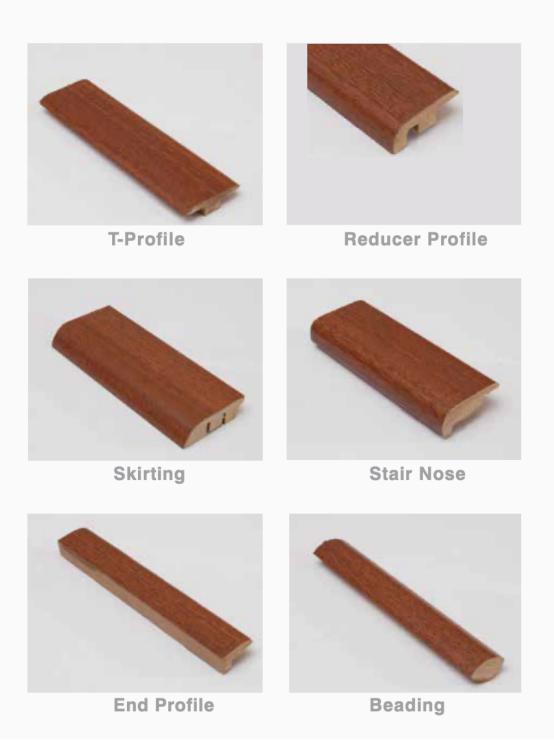

INSTALLATION



Installing a foor becomes child's play: A fingertip is enough to join panels – simply unpack, lay, snap together and done. No effort involved – your hammer and block can stay in the tool box.



MAINTENANCE

DO's



• Vacuum or broom the laminate floor to keep it away from loose dirt and dust.



 Wipe up spills like tea, coffee immediately.



• For heavier cleaning, use Kronotex laminate floor cleaner or a mixture of household vinegar and water (1-cup vinegar to 1-gallon warm water) or household ammonia and water (1/2 cup ammonia to 1-gallon warm water).



 The worst stains can be removed with acetone or denatured alcohol on a soft cloth without bleaching or damaging the floor. In a pinch, nail polish remover containing acetone is a handy substitute.



 Protect the laminate flooring in high traffic areas and from excessive tracking of outside dirt and soil with mats at all entrances. Use door mats and throw rugs outside room entrances and in front of kitchen sink and refrigerator to help keep dirt and grit off your floor, and to prevent damage and excessive wear.



 Protective felt pads on chair and furniture legs are recommended to further protect the floor. Replace plastic casters on chairs with rubber wheels and lift rather than slide heavy objects across the floor.



 Move heavy appliances and furniture by using a trolley rolled over plywood or pressed board.

 Minor damage to a laminate plank or tile can be easily repaired with laminate finishing putty. If the damaged area is larger than 1/4 of an inch, replacing the plank may be recommended. Please call our team to assess the damage.

DON'TS

- Don't allow water to stand on your floor for any length of time.
- Do not wax or refinish your laminate floor.



 Do not use soap or detergent-based cleaners, wax-based products or any type of polish on laminate floors, bleach, oil, soaps, as they leave a dull, filmy residue.



Do not scrape the floor to remove the things stuck to your floor, such as gum or candle wax. This situation is best handled by letting the spot harden completely, then scraping it gently off the floor with a plastic scraper. Residue can then be removed using a clean rag damped with a little Kronotex Laminate flooring cleaner.

EASY INSTALLATION

Kronotex laminates present the new adhesive-free 'Clic' installation locking system. This makes it easy to install even without a toolbox. All you need is a hammer and a simple tapping block to put your flooring in place. These 'Clic' panels can be installed on all dry subfloors and on suitable underlays. They can be dislodged, reinstalled and reused without any trouble

FAQS

► LAMINATED FLOORING

- 1) Can I install the flooring in my bathroom or another room that constantly gets wet?

 Ans- Laminated flooring cannot be installed in bathrooms or any room like it because the water will make the planks swell.
- 2) Can I install laminated flooring in my kitchen?

Ans- Laminated flooring can be installed in kitchens but you need to follow specific guidelines. It is recommended to install laminated flooring with a high wear resistance of min. Class32/AC4. Occasional splashes of water must be wiped off immediately.

- 3) How do I clean my laminated flooring?
- Ans- Laminated flooring is easy to clean. For detailed instruction, see our maintenance section for general and specific cleaning.
- 4) Do I follow a specific direction while installing laminated flooring in a room?

 Ans- Installing the planks in the same direction as the main light source in the room is the best way to put laminated flooring.
- 5) Can I use laminated flooring in combination with under-floor heating?

Ans- Laminated flooring can easily be used in combination with water floor heating on condition that the warm water tubes are min 3 cm underneath the surface and the water in the tubes doesn't exceed 28'C. Please follow the guidance of your under-floor heating installer. We recommend avoiding high temperature variations (plus and minus) when switching on/off the under-floor heating.

6) Can I put laminated floor on the stairs?

Ans- Laminated floor can be installed on stairs. We recommend gluing the laminate plank on the stair or install on commercial plywood and to finish with a stair nose.

7) Are laminated floors resistant to scratches?

Ans-Laminate flooring have a wide range of floor planks with different scratch resistance level (from AC3 to AC5) for residential and commercial use. However laminated floors are not scratch proof. A sharp object can damage the floor. Impact of a high heel shoe or the soft rubber wheels of official chairs pose no problem whatsoever, though we do recommend that chairs or furniture legs be covered with felt or plastic caps. Sand or grit on the floor should be avoided as much as possible. You can do that simply placing a good quality doormat at the entrance.

8) Are laminated floors healthy?

Ans- Laminate floor are environmentally friendly. The use of "chemical" ingredients in laminate floors follows the European standard so a laminate floor takes care of your health.

10) Can I put a heavy object (e.g. waterbeds, clothing cupboards...) on a laminate floor?

Ans- Placing heavy objects (like water beds, clothing cupboards...) on laminate floors is not an problem, provided an 8mm expansion joint is planned off around the object afterwards, you may finish the joint with a skirting or profile.

11) What is your floor type?

Ans- Our floor type is of direct pressure laminate (DPL) and high pressure laminate (HPL)

12) Can I use liquid cleaners such as phenyle etc?

Ans- Laminate floor should only be cleaned by using a slightly damp but well wrung out cloth. It is not advised to use any liquid cleaner, detergents etc.

13) Can the installed laminated flooring be dismantled & re-installed at the same place or another?

Ans- Yes, the existing laminate flooring can be dismantled and re-installed, provided the dismantling has to be done insuring that the locks are not damaged.

14) Can we replace a single plank or more, caused by an accidental breakage?

Ans- Yes, we can replace single or more planks caused due to accidental breakage by dismantling from any of one side to the point of damage, provided the same shade material is available with the company or with you.



Kronotex Laminate Flooring (India) Private Limited