






OLLECTI



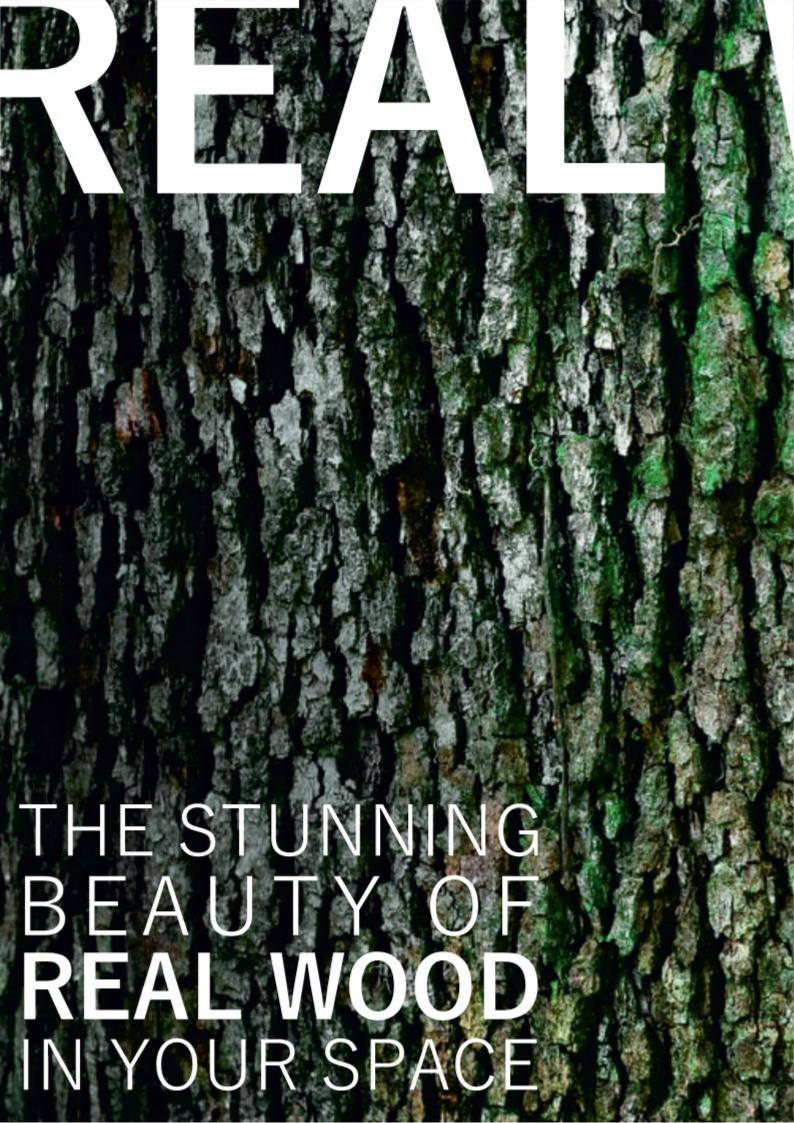

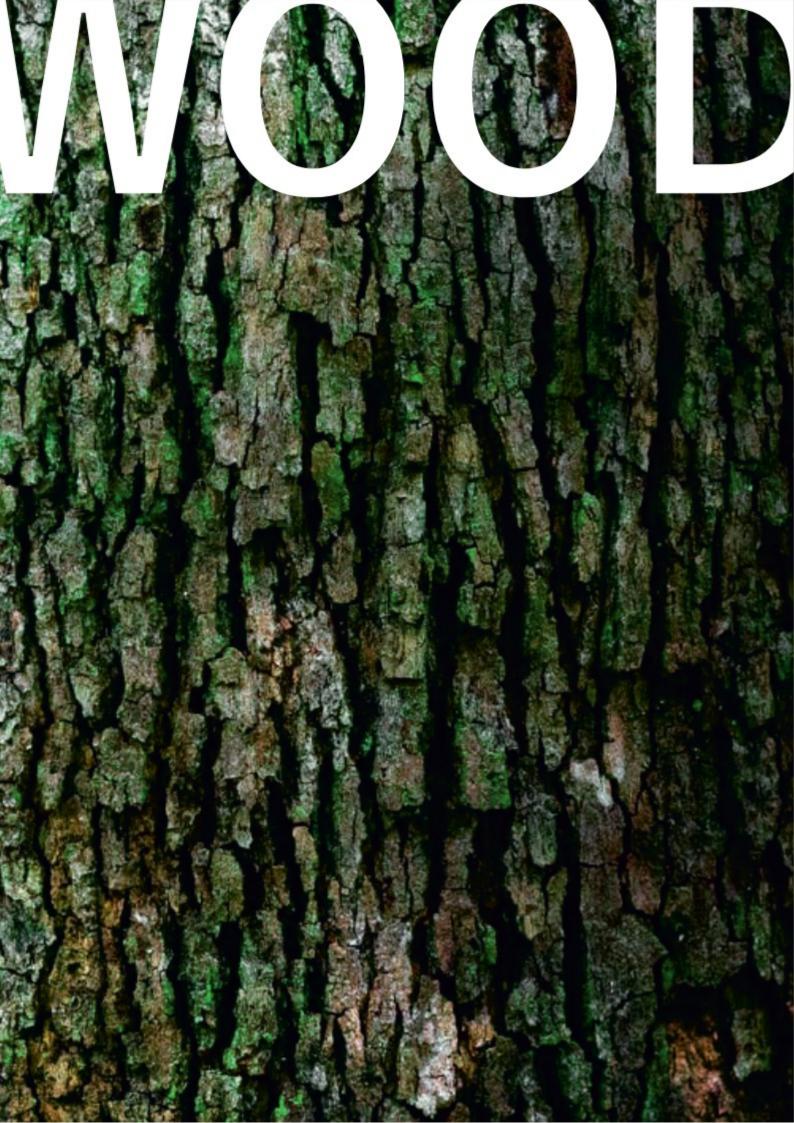

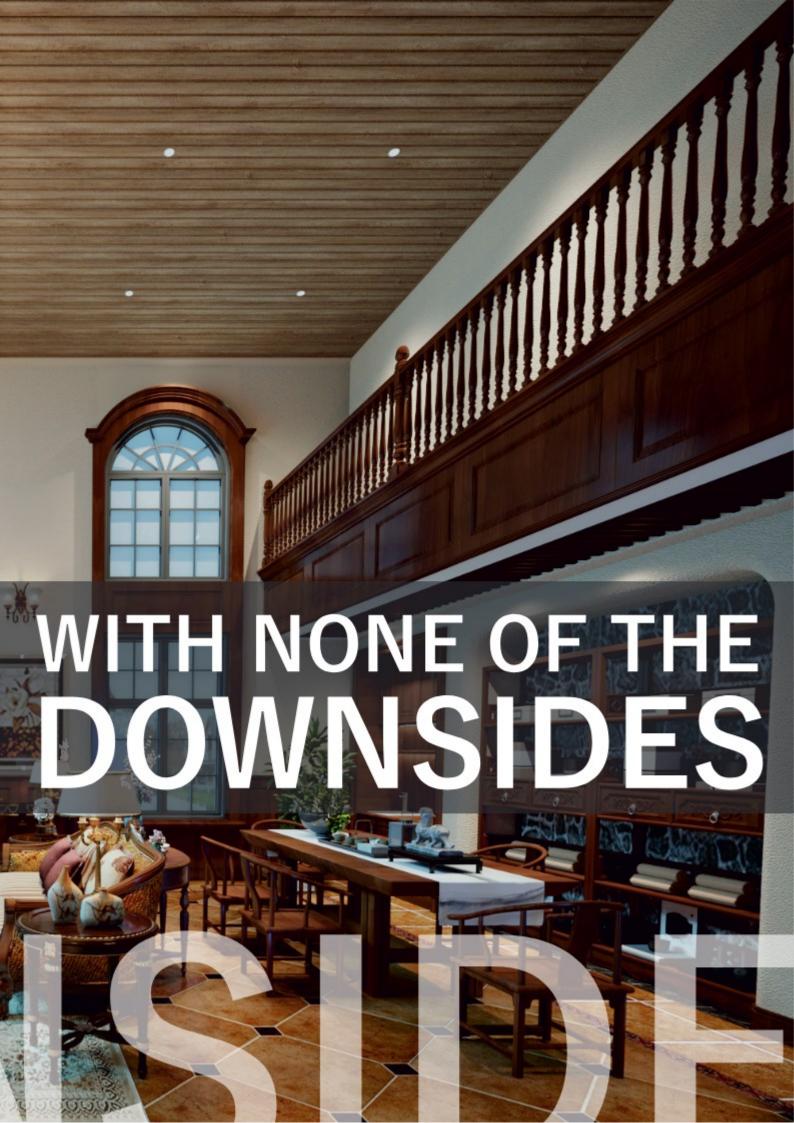









Features

PARÉ presents a fusion of Real wood look & modern technology with Soffit Systems.



Fire-retardant





No VOC Emission

Maintenance free





Scratch Resistant

Easy to Install



Light weight



Seamless post Installation

Anti-bacterial

Termite Proof







Waterproof

Product Sizing

Soffit Panels



J-Trim

Perimeter profile 3060/4000

T-Trim

Connector Profile

76 12 42

Inside Corner Profile



Outside Corner Profile







TECHNICAL DECLARATION

Fire retardant: 💸



Soffit and its accessories comply with Ball-pressure, Needle flame and Glow-wire test. Along with that, it also complies with UL94 V0 test acquiring a class 1 flammability rating when tested in accordance to IS 10151.



Soffit and its accessories comply with cold duration test (-20 degrees) in accordance with IS 10151.


Anti-Bacterial: 🛞



Soffit and its accessories were tested with 1000 cfu/ml of various different fungi and bacteria; within 30 seconds, the value is reduced to 0 cfu/ ml thus making it a truly anti-bacterial product.

Product Specifications:

Meets or exceeds the standard specification of (ASTM D-4477) and its referenced documents. Where not defined in ASTM D-4477, our products also meet the stringent quality control parameters of

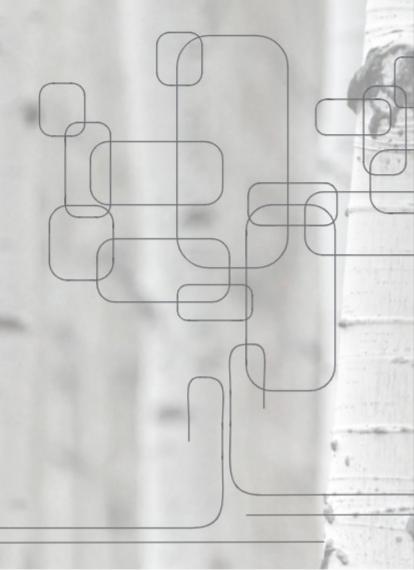

ECLARAIION

Relevant Codes and Regulations Compliance:

Conforms to ASTM Specifications D-4477

Colour: Uniformity is spectrophotometrically controlled.

Lock: Optically measured and controlled.

Product Test Data:

TESTS	RESULTS	
Impact resistance:	No deformation observed. (Tested at 50 LBS)	
Tensile strength, MPa:	>37.0	
Tensile modulus, MPa:	>2000	
Surface distortion:	None at 120F	
Length:	Within ¼" of specification	
Lock control:	Complies	
Color Change:	<2 grayscales (16 hrs under 1200W/m2 UV radiation at 50 degrees)	
Squareness	<1/8" of square	

Declared Performance:

Essential Characteristic	Performance	Harmonised Technical Specification
Reaction to fire EN 13501-1	D-s3;d0	EN 13245-2:2009/AC:2010
Release of Dangerous substance	NPD	
Durability	A.4.65	





INNOVATIONS PVT. LTD.

Headquarters:

101-103, Jai Commercial Complex, Cadbury Junction, Thane (w), Maharashtra, India-400601

Experience Center:





🕒 +91 8356954856 🖾 hello@pareindia.com 🏐 www.pareindia.com



Follow Us