









WATERPROOF

PARÉ Soffit Louver Systems are resistant to water and are therefore perfect for wide number of areas!



LONGETEVITY

PARÉ Soffit Louvers have been specially crafted to ensure long life, they also come with 10 years warranty!



REAL WOOD FEEL

The Unique aesthetic of real wood along with the touch and feel has been captured by the PARÉ Soffit Louver systems, without any downsides of using real wood.







ANTI-BACTERIAL

PARÉ Soffit Louvers have certified anti-bacterial properties which destroys wide range of bacteria in a very short span of time.



UNIQUE INTERLOCKING

The tongue and groove technology in PARÉ Soffit Louvers not only ensure a seamless look but also enable you to interlock with other compatible PARÉ products.



TERMITE & RUST PROOF

The unique composition of PARÉ Soffit Louver Systems make it impervious to the effect of age, degradation, insects and/or termites making it a truly evergreen product for the ages.



SIZING

Due to PARÉ's state of the art facility, we can offer custom sizing with a minimum order quantity (MOQ) of 5000 sq.ft. only

With this, you can increase the length of the Soffit Louver Panels to the size you require. For retail consumers, this will yield a seamless look for your surfaces whereas for commercial consumers, custom sizing reduces the wastage percentage by a good margin while maintaining a seamless look.









OAK WOOD OCRE



ARTISAN OAK



MAHOGANY



IMPERIAL NUT



ASH WOOD GREY



BEECH WOOD



PRODUCT SIZING 🎉

SOFFIT LOUVER PANELS



J-TRIM



T-TRIM




INSIDE CORNER PROFILE



OUTSIDE CORNER PROFILE



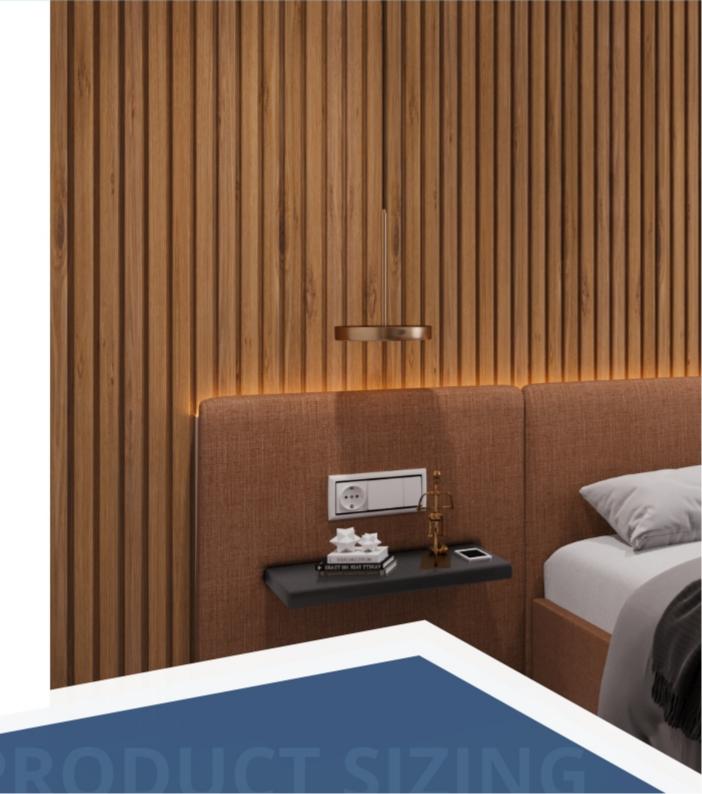

TECHNICAL DECLARATION

Fire retardant: 💸



PARÉ Soffit and its accessories comply with Ballpressure, Needle flame and Glow-wire test. Along with that, it also complies with UL94 V0 test acquiring a class 1 flammability rating when tested in accordance to IS 10151.

Anti-Bacterial:



PARÉ Soffit and its accessories were tested with 1000 cfu/ml of various different fungi and bacteria; within 30 seconds, the value is reduced to 0 cfu/ml thus making it a truly anti-bacterial product.

Cold resistance: (8)



PARÉ Soffit and its accessories comply with cold duration test (-20 degrees) in accordance with IS 10151.

Product Test Data:

	Impact resistance:	No deformation observed. (Testedat 50 LBS)
	Tensile strength, MPa:	>37.0
	Tensile modulus, MPa:	>2000
	Surface distortion:	None at 120F
	Length:	Within ¼" of specification
	Lock control:	Complies
	Color Change:	<2 grayscales (16 hrs under 1200W/m2 UV radiation at 50 degrees)
	Squareness	<1/8" of square
	Thickness	1.2 – 1.3 mm
-		

Product Specifications:

Meets or exceeds the standard specification of (ASTM D-4477) and its referenced documents. Where not defined in ASTM D-4477, our products also meet the stringent quality control parameters of PARÉ.

Relevant Codes and **Regulations Compliance:**

Conforms to ASTM Specifications D-4477 Color: Uniformity is spectrophotometrically controlled.

Lock: Optically measured and controlled.

